

LARSON BOATS
Larson, LLC.
700 Paul Larson Memorial Drive
Little Falls, MN 56345
(320) 632-5481

LARSON Better Built Boats.

LARSON Better Built Boats.

LARSON BOATS
Larson, LLC.
700 Paul Larson Memorial Drive
Little Falls, MN 56345
(320) 632-5481

Sport Boat Models Owner's and Operator's Manual

Model/Number: _____

Dealer Name _____

Hull Identification Number: _____

Address _____

Date of Ownership: _____

Phone # _____

Larson Boats reserves the right to change, alter, and modify their finished boats, parts, and specifications included in your Owner's Manual without notice. Optional equipment described in this manual may vary from model to model and year to year. Please consult with your Larson Dealer for current information on standard and optional equipment and specifications.

Revised 04/08



WARNING

A wide variety of components used on this vessel contain or emit chemicals known to the State of California to cause cancer and birth defects and other reproductive harm.

EXAMPLES INCLUDE:

- Engine and generator exhaust
- Engine and generator fuel, and other liquids such as coolants and oil, especially used motor oil
- Cooking fuels
- Cleaners, paints, and substances used for vessel repair
- Waste materials that result from wear of vessel components
- Lead from battery terminals and from other sources such as ballast or fishing sinkers

TO AVOID HARM:

- Keep away from engine, generator, and cooking fuel exhaust fumes
- Wash areas thoroughly with soap and water after handling the substances above

GM2203301

SPORT BOAT – Table of Contents



PRE-LAUNCH & UNDERWAY (CONT.)3

Anchoring3.6

Fueling Recommendations3.6

Getting Underway3.8

Controls3.9

Starting Procedures3.12

Trimming3.14

Engine Shut Down3.16

Reloading Your Boat3.16

WELCOME ABOARD1

Cuddy/Bowrider Owner's Manual Structure1.1

Responsibilities1.2

Boat Records1.3

Warranty1.3

Boating Safety1.5

Safety Underway1.10

Navigational Aids Chart1.15

Weather1.17



SPORT BOAT – Table of Contents

WELCOME ABOARD1

Cuddy/Bowrider Owner's Manual Structure1.1

Responsibilities1.2

Boat Records1.3

Warranty1.3

Boating Safety1.5

Safety Underway1.10

Navigational Aids Chart1.15

Weather1.17

Safety Equipment1.18

Additional Recommended Equipment1.20

Boating Laws & Regulations1.20

Illegal to Dump1.21

Larson Boat Log (Form)1.22

Larson Cruise Log (Form)1.23

Larson Fuel Usage Log (Form)1.24

SYSTEMS & COMPONENTS2

Safety Labels2.1 - 2.3

Systems2.3

Typical 12-Volt DC Cabin Schematic2.4

Typical Single Engine Schematic2.5

Ski 'n Fish Bow Panel2.6

Components2.12

Bow Panel2.20

Trolling Motor2.20

Livewell2.22

Additional Safety Information
(Ski'n Fish Models)2.22

PRE-LAUNCH & UNDERWAY3

Trailing3.1

Launching3.2

Loading3.5

PRE-LAUNCH & UNDERWAY (CONT.)3

Anchoring3.6

Fueling Recommendations3.6

Getting Underway3.8

Controls3.9

Starting Procedures3.12

Trimming3.14

Engine Shut Down3.16

Reloading Your Boat3.16

Emergency Procedures3.17

Reacting to Emergencies3.19

MAINTENANCE4

Service & Maintenance Schedule4.1

Troubleshooting Chart4.5

CARE & APPEARANCE5

Deck and Hull Care5.1

Upholstery5.3

Windshields and Windows5.4

Carpeting5.4

Canvas5.4

WINTERIZATION & STORAGE6

Prior to Storage6.1

Engine, Systems & Components6.1

Interior Cleaning6.3

If You Store Your Boat on a Trailer6.4

Recommissioning6.4

NAUTICAL TERMINOLOGY7

Warranty7.9

Warranty Registration Transfer Request

Use your owner's manual as a guide to familiarize yourself with all the systems and components on board your Larson boat. The procedures in this manual will assist you with safe and proper operation, and maintenance of your boat. The level of information may be general in some cases and more detailed in others.

Congratulations on the purchase of one of the finest pleasure boats in the world. It has been proudly built to give you many years of boating pleasure.

We've done our part—

LARSON Better Built Boats. WELCOME ABOARD

**CUDDY/BOWRIDER OWNER'S MANUAL
STRUCTURE**

LARSON Better Built Boats. WELCOME ABOARD

Congratulations on the purchase of one of the finest pleasure boats in the world. It has been proudly built to give you many years of boating pleasure.

We've done our part—

Pride of craftsmanship is your assurance that you've bought the very best. All Larson models meet or exceed U.S. Coast Guard safety standards relating to load and horsepower capacity, flotation, electrical, steering, ventilation, and fuel systems, in effect the date of manufacture.

But our work is not over—

We stand behind every boat we build. Your Larson dealer will assist you with registration of your boat for warranty. They will be happy to help you maintain your boat and answer questions concerning warranty, performance, accessories, and service. The warranty card must be filled out and sent to establish your warranty.

Now it's your turn—

This Owner's Manual is intended to help you become familiar with your new boat. While this manual contains information to assure safe and enjoyable boating, it does not provide everything you need to know. Above all, take time to know your boat. Read the material supplied by the manufacturer of your engine. This owner's manual does not supersede or change any of their specifications, operation, or maintenance instructions. Also read all literature supplied with your boat by the manufacturers of the various accessories which are used on your boat. Larson Boats recommends that you read the boating literature published by your State Boating Agency and the U.S. Coast Guard.

**CUDDY/BOWRIDER OWNER'S MANUAL
STRUCTURE**

Use your owner's manual as a guide to familiarize yourself with all the systems and components on board your Larson boat. The procedures in this manual will assist you with safe and proper operation, and maintenance of your boat. The level of information may be general in some cases and more detailed in others.

Suppliers of the more complex components such as engine, electronics, pumps, and refrigerator, supply their own instructional manuals delivered to you when you purchased your boat. These suppliers maintain their own manufacturer's warranty and service facilities. It is essential that you fill out each warranty card and mail them to each manufacturer informing that you are a registered owner of their product(s). Record all information regarding these products on the "Boat Log" located in this chapter under Boat Records. Keep the Boat Log in a safe place at home and never on board the boat.

Your owner's manual is designed with the boat owner/operator in mind. The intent of the manual is to provide sufficient information to allow the user to safely operate and maintain your new Larson boat. Your Cuddy/Bowrider Owner's Manual is structured as follows:

WELCOME ABOARD

Included in the Welcome Aboard Chapter of your manual is our welcome aboard message to all new Larson boat owners, construction and standards, dealer and owner responsibilities, warranty, important logs and this summary of your owner's manual.

CUDDY/BOWRIDER SYSTEMS & COMPONENTS

Your Cuddy/Bowrider Systems & Components Chapter provides illustrative information covering system items such as electrical, fuel and water systems on board as well as specified information regarding the components installed on your new Larson boat.

The Safety portion of this chapter contains safety recommendations, safety information and practices, weather precautions, and safety equipment (on board and underway). Additionally, specific safety warnings and comments are located throughout your owner's manual (and on your boat), therefore you should carefully read the entire manual.

NAUTICAL TERMINOLOGY

Terms and definitions associated with your boat that you will encounter while participating in recreational boating can be found in the Boating Terminology Chapter.

WINTERIZATION & STORAGE

The Winterization & Storage Chapter presents information and procedures to follow when your boat will be winterized or stored for extended periods of time.

The Safety portion of this chapter contains safety recommendations, safety information and practices, weather precautions, and safety equipment (on board and underway). Additionally, specific safety warnings and comments are located throughout your owner's manual (and on your boat), therefore you should carefully read the entire manual.

CUDDY/BOWRIDER SYSTEMS & COMPONENTS

Your Cuddy/Bowrider Systems & Components Chapter provides illustrative information covering system items such as electrical, fuel and water systems on board, as well as specified information regarding the components installed on your new Larson boat.

PRE-LAUNCH & UNDERWAY

The intent of the Pre-launch & Underway Chapter is to familiarize the boat owner/operator with necessary information in preparation of trailering, launching and putting your new Larson boat in the water. Encountering underway adjustments and situations is also explained.

MAINTENANCE

Recommendations for keeping your new Larson boat in sound operational condition, making adjustments, frequency of checks and inspections, and a troubleshooting chart are all introduced in the Maintenance Chapter.

CARE & APPEARANCE

Provided in the Care & Appearance Chapter are inspections, cleaning, and maintenance for your boats fiberglass, deck and canvas.

WINTERIZATION & STORAGE

The Winterization & Storage Chapter presents information and procedures to follow when your boat will be winterized or stored for extended periods of time.

NAUTICAL TERMINOLOGY

Terms and definitions associated with your boat that you will encounter while participating in recreational boating can be found in the Boating Terminology Chapter.

RESPONSIBILITIES

Larson Boat Owner

1. Set up an appointment with your Larson dealer to discuss all warranties. Complete and return the Larson Boats Limited Warranty Registration card, and keep a record of the hull number for future reference.
2. Inspect the boat at the time of delivery to verify that all systems and components are operating safely and acceptably. Read all manuals and instructions.
3. Operate all equipment in compliance with the manufacturer's instructions.
4. Schedule an appointment with your Larson dealer to spell out the pre-delivery engine service record. Sign this record to indicate that it has been explained to you in detail by your dealer.
5. Schedule with your dealer your boat's 20 hour check-up.

IMPORTANT: Make sure that your dealer checks the engine alignment during your boat's 20 hour check-up. The engine alignment check should be performed in accordance with the recommended procedures as stated by the

The purpose of the **Cruise Log** is to provide a record of your destination, departure and return times, boat description, passenger list and other information regarding your trip. We highly recommend that you add a protective coating to your hull. A marine barrier coating with proper surface preparation is required if the boat is bottom painted or if the boat is left in fresh or salt water for more than 60 days in a 90 day period.

You have been provided with three very useful forms at the end of this section. The **Boat Log** is used to write down all of your boat's important information and data regarding the major components installed on your boat. Once you have entered all the information, remove the Boat Log from your Cuddy/Bowrider Owner's Manual and keep it in a safe place. **Do not** keep this log on board your boat.

BOAT RECORDS

engine manufacturer in your engine owner's manual. Failure to do so could result in drive train damage and is not covered under the Larson Boats Warranty.

6. Larson Boats recommend that you reference your engine warranty certificate for initial inspection and service requirements.
7. Hull blisters that form below the waterline: Any boat left in the water for any period of time is susceptible. Nearly all the marine bottom paint manufacturers today offer coats that help protect the hull against osmosis blistering. We highly recommend that you add a protective coating to your hull. A marine barrier coating with proper surface preparation is required if the boat is bottom painted or if the boat is left in fresh or salt water for more than 60 days in a 90 day period.
8. Perform or provide for the warranted periodic maintenance outlined in this manual and all related service guides and manuals.

Larson Boat Dealership

1. Your Larson dealer will discuss the terms of all warranties, and emphasize the importance of registering each warranty with the appropriate manufacturer.
2. Your Larson dealer will provide instruction for obtaining warranty service.
3. Your Larson dealer will cover each item on the pre-delivery service record with you, and then sign it to certify that all work has been suitably performed.
4. Your Larson dealer can provide you with a comprehensive instruction in the operation of your boat and all systems and components installed on board, just ask your dealer.

Failure to do so could result in drive train damage and is not covered under the Larson Boats Warranty.

6. Larson Boats recommend that you reference your engine warranty certificate for initial inspection and service requirements.
7. Hull blisters that form below the waterline: Any boat left in the water for any period of time is susceptible. Nearly all the marine bottom paint manufacturers today offer coats that help protect the hull against osmosis blistering. We highly recommend that you add a protective coating to your hull. A marine barrier coating with proper surface preparation is required if the boat is bottom painted or if the boat is left in fresh or salt water for more than 60 days in a 90 day period.

BOAT RECORDS

You have been provided with three very useful forms at the end of this section. The **Boat Log** is used to write down all of your boat's important information and data regarding the major components installed on your boat. Once you have entered all the information, remove the Boat Log from your Cuddy/Bowrider Owner's Manual and keep it in a safe place. **Do not** keep this log on board your boat.

The purpose of the **Cruise Log** is to provide a record of your destination, departure and return times, boat description, passenger list, and other information regarding your trip expectations. At the bottom of the log is a place to list emergency telephone numbers in case you encounter trouble underway and your return time has expired.

The **Cruise Log** is to be photocopied, filled out, and left ashore with a responsible person. In the event of an emergency, this log is to be reported to the proper authorities. The person reporting this information should list their name, location, and telephone number on the Cruise Log. You should make several copies of this log to use throughout the boating season.

The **Fuel Usage Log** is an easy way to log information covering engine hours, fuel consumption, miles traveled, RPMs, Average MPH, and GPH (gallons per hour). Observance of the information logged will forewarn you of scheduled maintenance and inspections.

WARRANTY

Your new boat is backed by a Limited Express Warranty. The complete warranty follows the Nautical Terminology chapter at the end of this manual. Being aware of its terms is important. If a problem arises with your Larson boat as a result of workmanship or materials, contact your Larson dealer as soon as possible to determine if it may be cov-

- Plexiglas windscreen breakage, rainwater leakage
 - Engines, parts or accessories not installed by Larson Boats.
 - Incidental and consequential damages (storage charges, telephone or rental charges of any type, inconvenience or loss of time or income.)
- NOTE: There are items which are **not covered** by this warranty, including:
- number is located below the rub rail on the starboard rear corner of your boat. Items that require service or repair. Your hull identification number, and necessary model numbers on hand for the items that require service or repair. Your hull identification number is located below the rub rail on the starboard rear corner of your boat.
- It is important to note that on many of the components in our boats, i.e. stoves, refrigerators, generators, trim tabs, etc., the warranties are extended by the component manufacturer. (Most component manufacturers repair or replace the defective component if it is returned to them.) The customer is responsible for all travel time, freight, or postage costs. We will pay for the cost to remove and replace the component.

ered by the warranty. Please have your hull identification number, and necessary model numbers on hand for the items that require service or repair. Your hull identification number is located below the rub rail on the starboard rear corner of your boat.

NOTE: There are items which are **not covered** by this warranty, including:

- Incidental and consequential damages (storage charges, telephone or rental charges of any type, inconvenience or loss of time or income.)
- Damage caused by neglect, lack of maintenance, accident, abnormal operation, improper installation or service.
- Haul-out, launch and towing charges.
- Transportation charges and/or travel time to and from a repair facility.
- Travel time to customer's home or marina.
- Service requested by customer other than that necessary to satisfy the warranty obligation.
- Oils, lubricants or fluids used in normal maintenance.
- Air freight, next-day or second-day air, or any special delivery fees unless pre-approved.
- Gelcoat cracking, yellowing, crazing or blistering, plexiglas, canvas, vinyl or tape **unless noted on equipment check off list** at time of delivery.
- Engines, drive trains, controls, props, batteries, or other equipment or accessories carrying their own individual warranties.

- It is important to note that on many of the components in our boats, i.e. stoves, refrigerators, generators, trim tabs, etc., the warranties are extended by the component manufacturer. (Most component manufacturers repair or replace the defective component if it is returned to them.) The customer is responsible for all travel time, freight, or postage costs. We will pay for the cost to remove and replace the component.
- Engines, parts or accessories not installed by Larson Boats.
- Plexiglas windscreen breakage, rainwater leakage through convertible tops, minor gelcoat discoloration, cracks, crazing, or air voids.
- Windshield and canvas top leakage: A certain amount of leakage can occur at the fasteners and at the stitching.
- Minor gelcoat discoloration or chalking may occur if regular washing and waxing has been neglected. Proper care of the gelcoat finish is the responsibility of the owner.
- Normal deterioration, i.e. wear, tear, or corrosion of hardware, vinyl tops, vinyl and fabric upholstery, plastic, metal, wood, or trim tape.
- Hardware: Metal hardware that has rusted or pitted will not be replaced under warranty. You should keep this hardware clean and wiped down with a light oil (WD40).
- Vinyl tops: Larson does not warrant damage that might occur when a boat is being towed on a trailer with the top up, and does not warrant shrinkage, mildew, or other normal deterioration.

1.4

Advisory statements forewarn conditions that effect equipment operation, maintenance and servicing practices and occur in two levels.

Advisory Statements

Your owner's manual uses five levels of advisory and hazard statements to alert you to special information, operating procedures or safety precautions. All statements begin with a signal word to identify the importance of the statement. Statement levels follow this order (increasing importance):

- Any boat used for commercial purposes: This includes boats used for charter purposes or time-share.
- Any defect caused by failure of the customer to provide reasonable care and maintenance.

By signing the warranty registration card you, the new owner, indicate an understanding of the terms and conditions of the Limited Warranty. The warranty registration card should be properly completed by the dealer, signed by the new owner, and returned to us within fifteen (15) days after the original purchase in order to validate the warranty. Be sure to keep the Owner's Registration Card for your records.

All boat manufacturers are required by The Federal Boat Safety Act of 1971 to notify first time owners in the event any defect is discovered "which creates a substantial risk of personal injury to the public." In order for us to comply with that law, if it becomes necessary, it is essential that your warranty registration card with the owner's name, address, and boat serial number be completed and mailed to Larson Boats, Paul Larson Memorial Drive, Little Falls, MN 56345.

The limited warranty for your boat is transferable and can be extended to the next purchaser for the remainder of the warranty period by notifying Larson Boats in writing within 15 days of the transfer, by using the warranty registration transfer form found at the end of this manual. The transfer request must be accompanied by a copy of the title/registration and the \$500 transfer fee.

By signing the warranty registration card you, the new owner, indicate an understanding of the terms and conditions of the Limited Warranty. The warranty registration card should be properly completed by the dealer, signed by the new owner, and returned to us within fifteen (15) days after the original purchase in order to validate the warranty. Be sure to keep the Owner's Registration Card for your records.

- Any boat used for commercial purposes: This includes boats used for charter purposes or time-share.
- Any defect caused by failure of the customer to provide reasonable care and maintenance.

BOATING SAFETY

Your owner's manual uses five levels of advisory and hazard statements to alert you to special information, operating procedures or safety precautions. All statements begin with a signal word to identify the importance of the statement. Statement levels follow this order (increasing importance):

Advisory Statements

Advisory statements forewarn conditions that effect equipment operation, maintenance and servicing practices and occur in two levels:

Level 1 - NOTE

Signals a general advisory statement that clarifies or highlights a particular section of text.

Level 2 - IMPORTANT

Used to signal the possibility of damage to equipment or associated components.

Hazard Statements



This symbol means "pay attention!" Here is important information for your safety. If you don't follow these instructions, you can damage your boat, hurt yourself or someone else or, even worse, have a fatal accident.

The use of hazard statements is determined by the likely consequence of the warning with regard to severity (minor injury, severe injury, death), and the probability of severity (COULD result in, WILL result in).

CAUTION: This symbol and signal word indicate a potentially hazardous situation. If you ignore this safety message, property damage or minor or moderate personal injury MAY or CAN result.



2. Your boat and equipment should be kept in safe operating condition. Regularly inspect the hull, engine, safety equipment and all other boating gear.

Level 3 - Caution



CAUTION: This symbol and signal word indicate a potentially hazardous situation. If you ignore this safety message, property damage or minor or moderate personal injury MAY or CAN result.

Level 4 - Warning



WARNING: This symbol and signal word indicate a potential hazard. If you ignore this safety message, serious injury or death CAN result.

Level 5 - Danger



DANGER: This symbol and signal word indicate an immediate hazard. If you ignore this safety message, serious personal injury or death WILL result.

Recommendations

Boating safety and the safety of your passengers is YOUR responsibility. You should fully understand and become familiar with the following safety precautions before launching your Larson boat.

1. Never operate a boat while under the influence of drugs or alcohol. Doing so is a Federal offense. Make sure only qualified drivers operate your boat.

2. Your boat and equipment should be kept in safe operating condition. Regularly inspect the hull, engine, safety equipment and all other boating gear.
3. Use extreme CAUTION while fueling your boat. Become familiar with the capacity of your boat's fuel tank and fuel consumption for commonly used RPMs. Avoid fueling at night except under well-lit conditions. Gas spills are hard to see in the dark.
4. Keep enough fuel on board for your planned cruising requirements as well as for changes in your plans due to adverse weather or other situations. We recommend the 1/3 rule: use 1/3 of your fuel to reach your destination, use 1/3 to return, and keep 1/3 in reserve.



WARNING: Each time you fill up, inspect fuel lines for leaks and hose deterioration, and be sure the engine compartment is free of gasoline vapors. Leaking fuel is a fire and explosion hazard and can cause severe injury or death. The use of alcohol modified fuels can cause deterioration of the fuel system.

5. All regulation lifesaving and fire extinguishing equipment on board, must be eye-catching, unrestricted and in safe operating condition. All passengers should become familiar with the operation and location of all equipment.
6. Keep an eye on the weather. Be aware of possible changing conditions by monitoring local weather broadcasts prior to departure. Strong winds and electrical storms should be personally monitored .
7. Accurate up to date charts of your boating area should always be on board.



Swim only in areas designated as safe for swimming. These areas are usually marked with a swim area buoy (Figure 1.1). Do not swim alone or at night.

first turn off the boat's engine and anchor the boat. awareness is of primary importance in preventing accidents and injury. If you are going to swim near your boat first turn off the boat's engine and anchor the boat. Safety awareness by the participant and the boat operator.

8. Before departure file your Cruise Log with a responsible person ashore.
9. Always operate your boat with consideration, courtesy and common sense.
10. At least one other passenger aboard should be indoctrinated on the basic operating procedures for handling your boat, in the event you unexpectedly become unable to do so.
11. Never allow passengers to ride on areas of your boat other than designated seating areas.
12. All passengers should remain seated while the boat is moving.
13. Never use the swim platform or boarding ladder while the engine is running. Be aware of the location of the drive units or propellers before entering the water from the swim platform ladder.
14. Study and obey the Rules of the Road. Always maintain complete control of your boat.
15. Never overload or improperly load your boat.

NOTE: The presence of the boat's maximum weight capacity plate does not override your responsibility to use common sense or rational judgment. The capacity of your boat is reduced by turbulent water and other adverse weather conditions. You should have prior knowledge of existing water and weather conditions before getting underway.

Water Sports

Water skiing, kneeboarding or riding a towed inflatable apparatus are some of the more popular water sports. Taking part in any water sport requires increased safety

11. Never allow passengers to ride on areas of your boat other than designated seating areas.
10. At least one other passenger aboard should be indoctrinated on the basic operating procedures for handling your boat, in the event you unexpectedly become unable to do so.
9. Always operate your boat with consideration, courtesy and common sense.
8. Before departure file your Cruise Log with a responsible person ashore.

awareness by the participant and the boat operator. Safety awareness is of primary importance in preventing accidents and injury. If you are going to swim near your boat first turn off the boat's engine and anchor the boat.

Swim only in areas designated as safe for swimming. These are usually marked with a swim area buoy (Figure 1.1). Do not swim alone or at night.

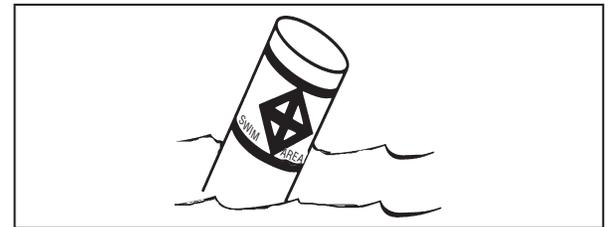


FIGURE 1.1 SWIM AREA BUOY

Do not allow anyone near the propeller(s), even when the engine is off. Propeller blades can be sharp and can continue to turn even after the engine is off. Stay at least 150 feet away from areas marked by a diver down float (Figure 1.2).

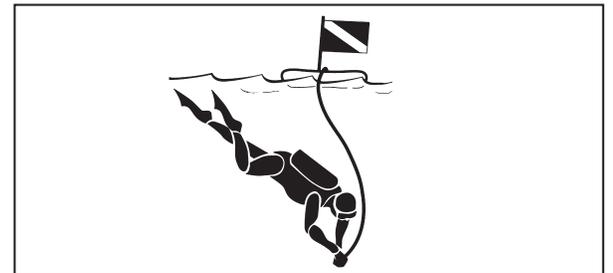


FIGURE 1.2 DIVER DOWN FLOAT

1. Allow only capable swimmers to take part in any water sport.
- Everyone participating in a water sport should observe these guidelines:
7. Do not water ski between sunset and sunrise. It is illegal in most states.
8. Always attach the waterski rope to the ski pylon. Do not use the ski pylon to tow your boat or other boats.

WARNING: Switch engine off before taking skiers aboard from in the water. Do not leave engine running in neutral; if the shift is accidentally engaged the skier could be seriously injured by the propeller.



WARNING: Larson boats are not designed and should not be used for the pulling of Para-sails, kites, gliders, or any other device that is designed to become airborne when drawn behind a boat.



WARNING: Larson boats are not designed and should not be used for the pulling of Para-sails, kites, gliders, or any other device that is designed to become airborne when drawn behind a boat.

Everyone participating in a water sport should observe these guidelines:

1. Allow only capable swimmers to take part in any water sport.
2. Always wear a personal flotation device (PFD) approved by the U.S. Coast Guard. Wearing a properly designed PFD will help a stunned or unconscious person stay afloat.
3. Always participate in water sports in safe areas. Stay away from boats, beaches, swimmers and heavily traveled waterways. Be considerate of others you share the water with.
4. Have a second person aboard to observe what is going on behind the boat and keep the driver informed. The driver must give full attention to operating the boat and the waters ahead.
5. Give immediate attention to a person who has fallen. He or she is vulnerable in the water alone and may not be seen by other boaters. Be careful not to swamp the boat while taking a skier aboard.
6. Approach a person in the water from the lee side (opposite the direction of the wind). Stop the boat's motor before coming close to the person.



WARNING: Switch engine off before taking skiers aboard from in the water. Do not leave engine running in neutral; if the shift is accidentally engaged the skier could be seriously injured by the propeller.


7. Do not water ski between sunset and sunrise. It is illegal in most states.
8. Always attach the waterski rope to the ski pylon. Do not use the ski pylon to tow your boat or other boats.

Figure 1.3 identifies a set of hand signals recommended by the American Water Ski Association (AWSA). Skier, observer and boat operator should all know and understand these seven (7) simple signals from the skier. The observer must inform the driver of the skier's hand signals. The driver must give full attention to operating the boat and the water's ahead.

For more information about water skiing, please contact the American Water Ski Association, 799 Overlook Drive, Winter Haven, Florida 33884 (1-800-533-2972).

Drugs and Alcohol

In the best interest of safety, you SHOULD refrain from the use of Drugs and/or Alcohol while operating your boat. Operation of motorized vessels while under the influence is a Federal offense carrying a significant penalty. The use of Drugs and/or Alcohol will decrease reaction time, impede judgement, impair vision, and inhibit your ability to safely operate a boat.

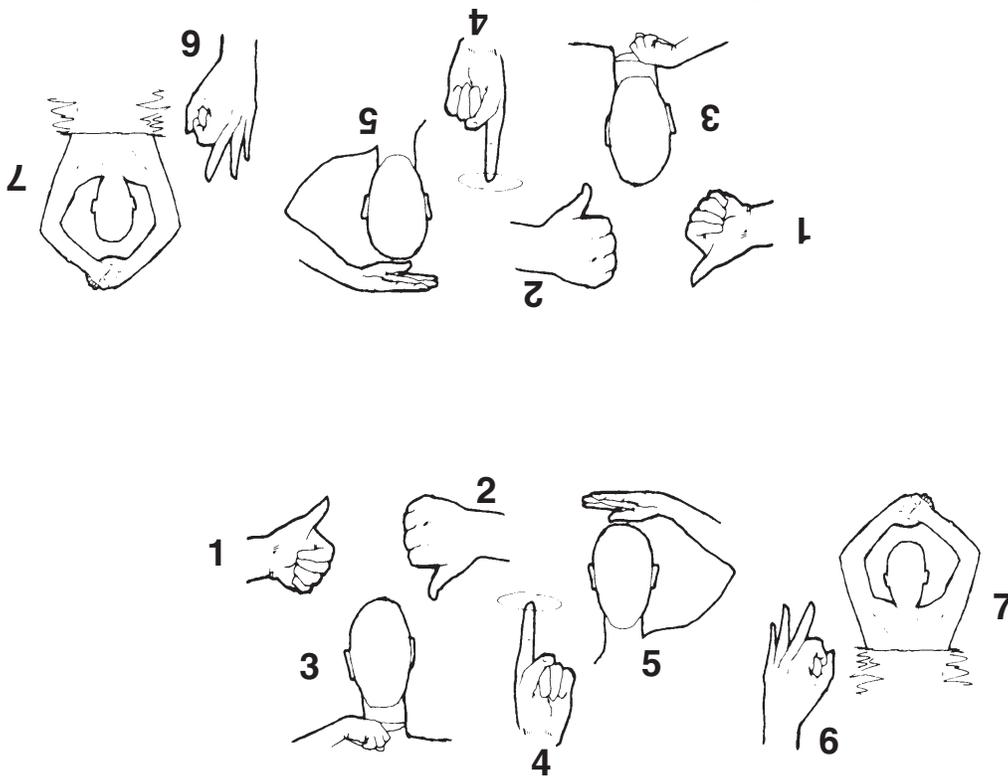

1. **Thumb Up:** Speed up the boat.
2. **Thumb Down:** Slow down the boat.
3. **Cut Motor/Stop:** Immediately stop boat. Slashing motion over neck (also used by driver or observer).
4. **Turn:** Turn the boat (also used by driver). Circle motion—arms overhead. Then point in desired direction.
5. **Return to Dock:** Pat on the head.
6. **OK:** Speed and boat path OK. Or, signals understood.
7. **I'm OK:** Skier OK after falling.

FIGURE 1.3 – AWSA WATER SKIING HAND SIGNALS

Safe Boating Courses

Your local U.S. Coast Guard Auxiliary and the U.S. Power Squadrons offer comprehensive safe boating classes several times a year. You may contact the Boat/U.S. Foundation at 1-800-336-BOAT (2628), or in Virginia 1-800-245-BOAT (2628) for a course schedule in your area. Also contact your local U.S. Coast Guard Auxiliary or Power Squadron Flotilla for the time and place of their next scheduled class.

Rules of the Road

Your Larson boat is subject to U.S. Coast Guard-enforced marine traffic laws known as “**Rules of the Road.**” There are two sets of rules — the United States Inland Navigational Rules and the International Rules. The United States Inland Rules are applicable to all vessels inside the demarcation lines separating inland and international

waters. The “**Rules of the Road**” can be obtained from your local U.S. Coast Guard Unit or the United States Coast Guard Headquarters (1300 E. Street NW, Washington, D.C. 20226) in the publication titled, “**Navigational Rules, International-Inland.**”

“**Aids to Navigation**” (U.S. Coast Guard pamphlet #123) explains the significance of various lights and buoys. This and other pamphlets, including the “**Boating Safety Training Manual,**” and “**Federal Requirements For Recreational Boats**” are also available from the U.S. Coast Guard Headquarters.

Because of proposed alterations in buoys and markers, contact the U.S. Coast Guard to stay informed of impending changes. If you have a ship-to-shore radio telephone on board, heed storm warnings and answer any distress calls.

Warning: Carbon monoxide (CO) can be harmful or fatal if inhaled. Brain damage or death can occur if



Carbon Monoxide

- Keep your engine will tuned to decrease exhaust hydrocarbon emissions that pollute the air and water.
- Operate you boat with regard for the safety warnings. Operate you boat with regard for the safety of other boats and people in your boating area.

The spoken word "MAYDAY" is the international signal of distress. **"MAYDAY" should NEVER be used unless there is present danger, an emergency, and you are in need of immediate assistance.**

SAFETY UNDERWAY

General Rules of Seamanship

1. Cross waves at right angles.
2. When caught in heavy water or squalls, head your boat either directly into the waves or at a slight angle. Reduce your speed, but maintain enough power to maneuver your boat safely.
3. Keep your speed under control. Respect the rights of boats engaged in fishing, swimming, water skiing, or diving. Give them a "wide berth".
4. When meeting a boat head-on, keep to the right whenever possible.
5. When two boats cross, the boat to the right or starboard has the right of way.
6. When overtaking or passing, the boat being passed has the right of way.

Additional Underway Information

- Always be aware of local laws on noise limits. Noise means engine noise, radio noise or even yelling by the people on your boat. Good seamanship demands that you operate your boat quietly so as not to infringe on the rights of others. Don't use thru-transom exhaust unless you are well off shore.
- You are responsible for any damage or injury caused by your boat's wake. Observe no wake speed zone

2. When caught in heavy water or squalls, head your boat either directly into the waves or at a slight angle

1. Cross waves at right angles.

General Rules of Seamanship

SAFETY UNDERWAY

The spoken word "MAYDAY" is the international signal of distress. **"MAYDAY" should NEVER be used unless there is present danger, an emergency, and you are in need of immediate assistance.**

warnings. Operate you boat with regard for the safety of other boats and people in your boating area.

- Keep your engine will tuned to decrease exhaust hydrocarbon emissions that pollute the air and water.

Carbon Monoxide



Warning: Carbon monoxide (CO) can be harmful or fatal if inhaled. Brain damage or death can occur if exposed to carbon monoxide. Keep exhaust outlets clear of blockage. Provide adequate ventilation. Open hatches, doors, windows and vents to insure adequate ventilation. Close engine compartment doors and hatches when engine or generator is running. Avoid operating the boat for extended periods of time at idle speed and be sensitive to weather conditions that may prevent CO from dissipating into the air.

Carbon monoxide accumulation is affected by vessel geometry; hatch, window and door openings; ventilation openings; proximity to other structures; wind direction; vessel speed; and a multitude of other variables.

Dangerous levels of carbon monoxide can also accumulate around the outside of the boat when the engine or generator is running. Do not run the engine or generator when anyone is in the water around your boat, or is located near the exhaust outlets.

NOTE: Boats fueled by diesel have limited carbon monoxide present in the exhaust in comparison to gasoline engine exhaust. However, the boat owner should still be aware of the causes and effect of carbon monoxide which may occur in different boating situations.

NOTE: The order of the above list is generally the sequence of appearance of symptoms. However, the order of appearance may change for different people.

9. Drowsiness
10. Incoherence
11. Nausea
12. Dizziness
13. Fatigue
14. Vomiting
15. Collapse
16. Convulsions

HOW A PERSON IS AFFECTED BY CARBON MONOXIDE

1. Carbon monoxide is a colorless, odorless and tasteless gas that is a natural by-product of internal combustion. It is commonly referred to as CO.
2. CO weighs about the same as air so it does not rise or fall like some other gases, but will distribute itself throughout the space.

PROPERTIES AND CHARACTERISTICS OF CARBON MONOXIDE

PROPERTIES AND CHARACTERISTICS OF CARBON MONOXIDE

1. Carbon monoxide is a colorless, odorless and tasteless gas that is a natural by-product of internal combustion. It is commonly referred to as CO.
2. CO weighs about the same as air so it does not rise or fall like some other gases, but will distribute itself throughout the space.

HOW A PERSON IS AFFECTED BY CARBON MONOXIDE

Carbon monoxide is absorbed by the lungs and reacts with blood hemoglobin to form carboxyhemoglobin, which reduces the oxygen carrying capacity of the blood. The result is a lack of oxygen for the tissues with the subsequent tissue death and, **if prolonged, death of the individual.**

EFFECTS OF CARBON MONOXIDE

Carbon monoxide in high concentrations can be fatal in a matter of minutes. Lower concentrations must not be ignored because the effects of exposure to CO are cumulative and can be just as lethal over time.

SYMPTOMS

Initial reactions to CO poisoning can easily be mistaken for sea sickness. One or more of the following symptoms can signal the adverse effect of CO accumulation:

1. Watering and itchy eyes
2. Flushed appearance
3. Throbbing temples
4. Inattentiveness
5. Inability to think coherently
6. Ringing in the ears
7. Tightness across the chest
8. Headache

9. Drowsiness
10. Incoherence
11. Nausea
12. Dizziness
13. Fatigue
14. Vomiting
15. Collapse
16. Convulsions

NOTE: The order of the above list is generally the sequence of appearance of symptoms. However, the order of appearance may change for different people.

TREATMENT (Evacuate, Ventilate, Investigate, Take Corrective Action)

If you suspect CO poisoning, immediately take the following steps:

1. Move the person to fresh air.
2. Administer oxygen if available.
3. Contact Medical help.
4. If the victim is not breathing, perform artificial respiration per approved CPR procedures until medical help arrives and takes over.
5. Ventilate area.
6. Investigate source of CO and take corrective action.

Prompt action can make the difference between life and death.

INSPECTION

Look and listen for leaks in the exhaust systems of both the generator and propulsion engine(s). Look for discol-

DO NOT run the boat or boat equipment for extended periods. Orient the boat for maximum dissipation of the exhaust or

1. Boathouses,
2. Proximity to sea walls, or
3. Proximity to other boats.

area such as:
 device is operated while the boat is moored in a confined
 mulate when a boat, generator or other engine operated
 for is running. Dangerous concentrations of CO can accu-

access panels are minimized to reduce the opportunity
 cableways and exhaust system doors, hatches, and
 3. Make sure gaps around the engine room plumbing and
 obstructed or restricted.
 2. Make sure ventilation systems work and are not
 1. Make sure all exhaust clamps are in place and
 secured.
 oration around joints in the system (water leaks, carbon,
 stains, etc.)

oration around joints in the system (water leaks, carbon, stains, etc.)

1. Make sure all exhaust clamps are in place and secured.
2. Make sure ventilation systems work and are not obstructed or restricted.
3. Make sure gaps around the engine room plumbing and cableways and exhaust system doors, hatches, and access panels are minimized to reduce the opportunity for CO to enter the accommodation space(s).

OPERATION

Cold Start vs. Warm Start: CO production is greater while the combustion chamber surfaces and gas passages are cold versus when they are warm. A boat operator should:

1. Pay attention to ventilating the boat.
2. Orient the boat so it will allow the maximum dissipation of CO.
3. Minimize the time spend on getting underway.

The following examples describe possible situations where carbon monoxide can accumulate within your boat while docked, anchored, or underway. Become familiar with these examples and their precautions to prevent dangerous accidents or death.

AT ANCHOR

Engines and generators running or while the boat is anchored exhaust carbon monoxide that can accumulate near the hull of the boat. Do not stand or swim near exhaust output or outdrive when engine is idling or genera-

tor is running. Dangerous concentrations of CO can accumulate when a boat, generator or other engine operated device is operated while the boat is moored in a confined area such as:

1. Boathouses,
2. Proximity to sea walls, or
3. Proximity to other boats.

Orient the boat for maximum dissipation of the exhaust or DO NOT run the boat or boat equipment for extended periods under these conditions. (See Figure 1.4.)


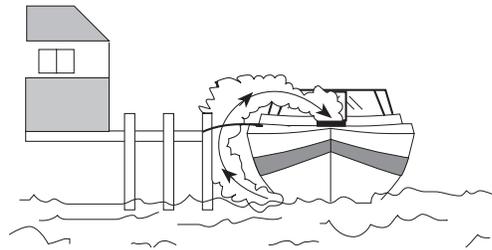


FIGURE 1.4 THE EFFECT OF SEA WALLS AND OTHER CONFINED SPACES

Carbon monoxide is emitted from any boat's exhaust. The operation, mooring, and anchoring in an area containing other boats may be in an atmosphere containing CO not of the operator's making. An operator likewise needs to be aware of the effect of his actions on other boats. Of prime concern is the operation of an auxiliary generator with boats moored along side each other. Be aware of the effect your exhaust may have on other vessels and be aware that the operation of other vessel's equipment may affect the carbon monoxide concentration on your vessel. (See Figure 1.5.)

FIGURE 1.5 THE EFFECT OF BOATS MOORED ALONG SIDE

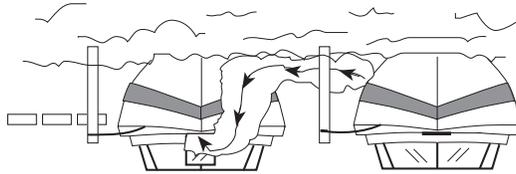

3. Canvas configurations - under various conditions
2. Excessive or unequally distributed weight.

FIGURE 1.7 INEFFICIENT TRIM ANGLES

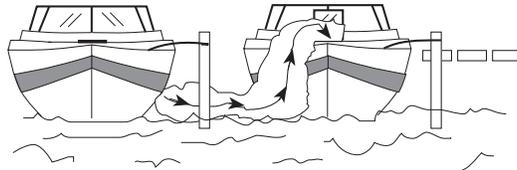
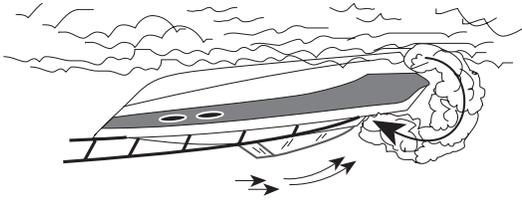


FIGURE 1.5 THE EFFECT OF BOATS MOORED ALONG SIDE

BACKDRAFTING (Station Wagon Effect)

Backdrafting or the “station wagon effect” is caused by air movement over or around a boat creating a low pressure area of suction area around the stern which can increase CO level on the boat. Backdrafting can be affected by relative wind direction, boat speed, and boat trim angle. (See Figure 1.6.)

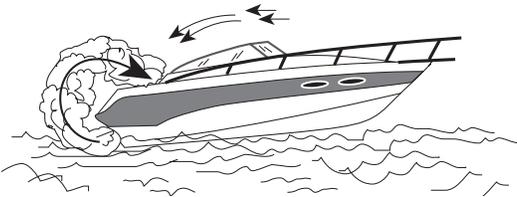


FIGURE 1.6 BACKDRAFTING - AIR FLOWS OVER BOAT AND BEHIND TRANSOM

Under certain speed and operating conditions the low pressure area may form in other regions and permit carbon monoxide to enter the hull through openings that are not on the back of the vessel. Boat factors which may affect CO concentration:

1. Inefficient trim angle. (See Figure 1.7.)

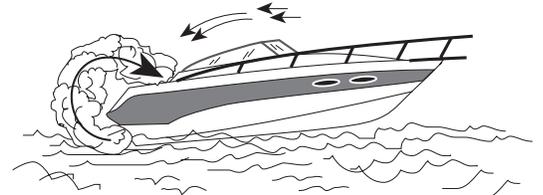


FIGURE 1.7 INEFFICIENT TRIM ANGLES

2. Excessive or unequally distributed weight.
3. Canvas configurations - under various conditions, adding or removing canvas may raise or lower CO levels. (See Figures 1.6, 1.7, 1.9.)

WARNING

WARNING: Hull exhaust from your boat can cause excessive accumulation of poisonous carbon monoxide gas within cockpit areas when using protective weather coverings (while underway or while stationary). Provide adequate ventilation when the canvas top, side curtains and/or back (aft) curtains are in their closed protective positions.

4. Opening and closing ports, hatches, doors, and windows may raise or lower CO levels on board a boat. (See Figures 1.8 and 1.9.)


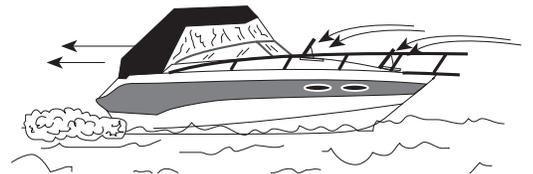


FIGURE 1.8 DESIRED AIR FLOW THROUGH THE BOAT

FIGURE 1.9 THE EFFECT OF CANVAS CONFIGURATIONS

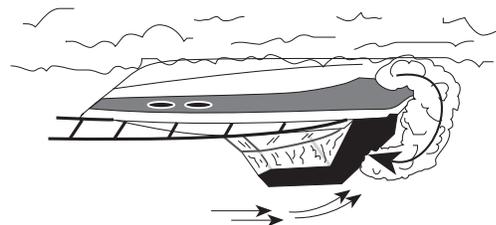

2. Carburetors/Injectors
 - Dirty or clogged flame arrester.
 - Malfunctioning automatic choke plate or faulty adjustment of manual choke plate.
 - Worn float needle valve and seat.
 - High float level.
 - Incorrect idle mixture adjustment.
 - Dirty or worn injectors.
3. Ignition System
 - Fouled or worn spark plugs.
 - Worn points or incorrect gap on points.
 - Shorted or opened circuit high tension spark plug cables.

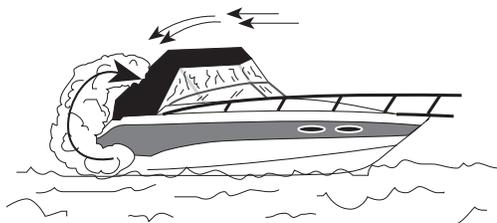


FIGURE 1.9 THE EFFECT OF CANVAS CONFIGURATIONS

VENTILATION OF ACCOMMODATION SPACES

Accommodation spaces need to be ventilated to introduce fresh air into the spaces. Ventilation method; e.g. windows, hatches, doors, and blowers; used to accomplish this may, under certain conditions, bring hazardous levels of CO into the accommodation spaces. Care should be taken to be aware of all prevailing conditions when using these ventilating methods.

PORTABLE GENERATOR SETS

Gasoline powered portable generators are available in the marine market place and are not an option available through Larson. Portable generators will produce CO. These sets discharge their exhaust products in locations which can lead to an increase in the accumulation of carbon monoxide in the accommodation space. This equipment is not recommended for use on Larson boats.

MAINTENANCE - ENGINE PERFORMANCE

Efficient engine performance is vital to minimizing CO production. The following items are those considered to have the greatest effect on increased CO production:

1. Fuel systems - fuel that is contaminated, stale or incorrect octane number.

2. Carburetors/Injectors
 - Dirty or clogged flame arrester.
 - Malfunctioning automatic choke plate or faulty adjustment of manual choke plate.
 - Worn float needle valve and seat.
 - High float level.
 - Incorrect idle mixture adjustment.
 - Dirty or worn injectors.
3. Ignition System
 - Fouled or worn spark plugs.
 - Worn points or incorrect gap on points.
 - Shorted or opened circuit high tension spark plug cables.
 - Incorrect ignition timing.
4. General
 - Worn piston rings and valves.
 - Engine temperature - cold running engines increase CO production. Engine cooling water system design and selection of thermostat(s) are primary considerations affecting engine operating temperature. Generally, an engine produces less CO if it operates at a relatively high temperature within manufacturer's specifications.
 - Exhaust Back-Pressure - certain alterations to the exhaust system may increase engine exhaust back pressure and CO production.
 - Restricted engine room or compartment ventilation.

CO Detectors

Even with the best boat design and construction, together with the utmost care in inspection, operation and maintenance, hazardous levels of CO may still be present in accommodation spaces under certain conditions. Continuing observation of passengers for symptoms of CO intoxication can be supplemented by a marine grade alarm type CO detector installed in the accommodation space.

STARBOARD SIDE
EVEN NUMBERED AIDS

SAFE WATER
MID-CHANNELS OR FAIRWAYS
NO NUMBERS-MAY BE LETTERED

PORT SIDE
ODD NUMBERED AIDS

LATERAL AIDS AS SEEN ENTERING FROM SEAWARD

ISOPHASE
QUICK FLASHING
OCCLUDING
FLASHING
RED LIGHT ONLY

Mo(A) MORSE CODE
WHITE LIGHT ONLY

ISOPHASE
QUICK FLASHING
OCCLUDING
FLASHING
GREEN LIGHT ONLY

Mo(A) MORSE CODE
WHITE LIGHT ONLY

STARBOARD ←

PORT →

REMEMBER THESE RULES

- OVERTAKING - PASSING:** Boat being passed has the right-of-way. KEEP CLEAR.
- MEETING HEAD ON:** Keep to the right.
- CROSSING:** Boat on right has the right-of-way. Slow down and permit boat to pass.

DANGER ZONE
(Dead ahead to 2 points abaft your bow)


Yield right-of-way to boats in your DANGER ZONE!

NAVIGATIONAL AIDS CHART

NAVIGATIONAL AIDS CHART

REMEMBER THESE RULES

- OVERTAKING - PASSING:** Boat being passed has the right-of-way. KEEP CLEAR.
- MEETING HEAD ON:** Keep to the right.
- CROSSING:** Boat on right has the right-of-way. Slow down and permit boat to pass.

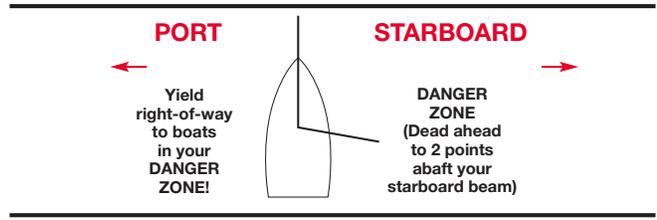

WHISTLE SIGNALS

- ONE LONG BLAST:** Warning signal (Coming out of slip)
- ONE SHORT BLAST:** Pass on my port side
- TWO SHORT BLASTS:** Pass on my starboard side
- THREE SHORT BLASTS:** Engine(s) in reverse
- FOUR OR MORE BLASTS:** Danger signal

BRIDGE SIGNALS

SOUND	VISUAL	DAY (Flag)	NIGHT (Lights)
VESSEL: Open	—●	□	○
BRIDGE: OK	—●	Same	Same
No	●●●●●		
VESSEL: Replies:	●●●●●		
RADIO: VHF CH. 13		◀■▶	◀●▶

STORM WARNINGS

RED FLAG Small craft (winds to 33 knots)	2 RED FLAGS Gale (winds up to 47 knots)	SQUARE RED FLAG BLACK BOX (Storm)	2 SQUARE RED FLAGS BLACK BOX (Hurricane)

LATERAL AIDS AS SEEN ENTERING FROM SEAWARD

PORT SIDE ODD NUMBERED AIDS	SAFE WATER MID-CHANNELS OR FAIRWAYS NO NUMBERS-MAY BE LETTERED	STARBOARD SIDE EVEN NUMBERED AIDS
<ul style="list-style-type: none"> GREEN LIGHT ONLY FLASHING OCCLUDING QUICK FLASHING ISOPHASE 	<ul style="list-style-type: none"> WHITE LIGHT ONLY MORSE CODE Mo(A) 	<ul style="list-style-type: none"> RED LIGHT ONLY FLASHING OCCLUDING QUICK FLASHING ISOPHASE
<p>LIGHTED BUOY</p> <p>G "9" Fl G 4sec</p> <p>CAN</p> <p>C "7"</p> <p>DAYMARK</p> <p>1</p> <p>G "1"</p>	<p>SPHERICAL</p> <p>RW SP "G"</p> <p>MR</p> <p>RW "A"</p> <p>LIGHTED AND OR SOUND</p> <p>RW "N" Mo (A)</p> <p>PREFERRED CHANNEL NO NUMBERS-MAY BE LETTERED COMPOSITE GROUP FLASHING (2 + 1)</p>	<p>LIGHTED BUOY</p> <p>H "8" Fl R 4sec</p> <p>NUN</p> <p>N "6"</p> <p>DAYMARK</p> <p>2</p> <p>R "2"</p>
<p>LIGHTED</p> <p>GR "C" Fl (2 + 1)</p> <p>CAN</p> <p>PREFERRED CHANNEL TO STARBOARD TOPMOST BAND GREEN GR "C" L</p> <p>JG</p> <p>GR "A"</p>		<p>LIGHTED</p> <p>RG "B" Fl (2 + 1)</p> <p>NUN</p> <p>PREFERRED CHANNEL TO PORT TOPMOST BAND RED RG "N" W</p> <p>JR</p> <p>RG "B"</p>

2. Prepare to assist the other craft unless your passengers and/or boat are in danger.
 1. If your boat has a ship-to-shore radio, contact (VHF Channel 16 or CB Channel 22) the U.S. Coast Guard or other rescue authorities immediately.
- If a serious collision occurs you should first check the condition of all passengers aboard, then inspect your boat to determine the extent of damage.

Collision

⚠ WARNING

WARNING: CO detectors should be marine grade and professionally installed and calibrated. Failure to do so may result in improper functioning and false reading.

Never disarm a CO detector. If a CO detector alarms, immediately ventilate the area and check passengers for symptoms of CO intoxication. See your Larson dealer for assistance in diagnosing the cause of the alarm.

Navigational Aids Chart

The illustrated Navigational Aids Chart on page 1.15 contains information concerning whistle signals, storm warnings, bridge signals and buoy description and information.

Running Aground

If your boat runs aground, first check persons aboard for injury. Then check for any damage to the boat or propeller(s). Watch the temperature gauge to make sure you do not over-heat the engine while running in the shallow water. If the boat is not taking on any water, it may be possible to heel the boat by shifting the weight of passengers and/or gear and raising the stern drive while reversing the engine.

⚠ WARNING

WARNING: Do not use deck hardware for towing. Larson Boats recommends that you use a commercial towing service if your boat becomes grounded.

WARNING: CO detectors should be marine grade and professionally installed and calibrated. Failure to do so may result in improper functioning and false reading.

Never disarm a CO detector. If a CO detector alarms, immediately ventilate the area and check passengers for symptoms of CO intoxication. See your Larson dealer for assistance in diagnosing the cause of the alarm.

⚠ WARNING

Collision

If a serious collision occurs you should first check the condition of all passengers aboard, then inspect your boat to determine the extent of damage.

1. If your boat has a ship-to-shore radio, contact (VHF Channel 16 or CB Channel 22) the U.S. Coast Guard or other rescue authorities immediately.
2. Prepare to assist the other craft unless your passengers and/or boat are in danger.
3. If the bow of the other boat penetrated your boat's hull, prepare to block the opening once the boats are separated.
4. Shore up the hole with a spare PFD or bunk cushion from your boat.
5. While blocking the hole, trim weight of the boat (where hole exists) so that it is out of the water during repairs.
6. If the extent of damage places your boat in a possible sinking condition have all persons aboard put on their PFD (personal flotation devices).

Fire

A fire on board your boat is a serious emergency, you must work quickly to implement safety procedures. If a fire occurs, immediately stop the engine.

1. Prompt all persons aboard to put on their PFD (personal flotation device).
2. If the fire is small, attempt to put it out with your fire extinguisher. If the fire is in the engine compartment, turn off the bilge blower. **Do not** open the engine com-

The present and forecasted weather conditions are of primary consideration, but a threat of possible storms should always be a concern. Observance of the following information

Storms

are known to have failures in their predictions or information gathering equipment. There is no substitute for a strong understanding of what action to take when the weather takes a turn for the worst. Many marinas fly weather signals. You should learn to recognize these signals, and monitor your local weather forecasts before leaving port.

partment. This feeds oxygen to the fire and flashback could occur.

3. If the fire gets out of control, execute a distress signal, and call for help if equipped with a ship-to-shore radio.
4. All persons aboard should jump overboard and swim a safe distance away from the flames.

Guidelines for fire prevention:

- Check the bilge for fuel leaks.
- Check cleaning products for flammability.
- Ventilate when cleaning or painting.
- Disconnect electrical system from power source when performing any type of maintenance.
- Use extra caution when using exposed flame around urethane foam.
- Extinguish smoking materials carefully.
- Ensure ventilation systems are not obstructed.
- Use only approved marine cooking and heating systems.
- Open flames demand constant attention.
- Keep flammable materials in approved containers.
- Replace circuit breaker fuse with one of the same amperage.
- Electrical appliances must be within rated amperage of boat circuits.
- A qualified marine electrician to service the electrical system.

IMPORTANT: All persons aboard should know the location and proper operation of the fire extinguishers.

WEATHER

Storms rarely appear without considerable advance notice. Accurate weather information from meteorological observation and reporting stations is available. Weather bureaus

Guidelines for fire prevention:

4. All persons aboard should jump overboard and swim a safe distance away from the flames.
3. If the fire gets out of control, execute a distress signal, and call for help if equipped with a ship-to-shore radio.
- partment. This feeds oxygen to the fire and flashback could occur.

are known to have failures in their predictions or information gathering equipment. There is no substitute for a strong understanding of what action to take when the weather takes a turn for the worst. Many marinas fly weather signals. You should learn to recognize these signals, and monitor your local weather forecasts before leaving port.

Storms

The present and forecasted weather conditions are of primary consideration, but a threat of possible storms should always be a concern. Observance of the following information will help in your safety afloat if storms do occur:

- Keep a watch on the horizon for approaching storm indicators.
- Turn radio ON. Dial in local weather station and monitor forecast.
- The best possible situation is to return to a safe port if time allows.
- Close and secure all portals and hatches. Stow all loose gear below deck and tie-down any gear required to remain on deck.
- Reduce speed as the seas build. Prompt all persons aboard to put on their PFD (personal flotation devices).
- Place a sea anchor out over the stern to maintain the boat's bow into the seas. If there is no sea anchor on board use a canvas bucket or any object that will offer resistance against the flow of the current.
- Radar reflectors (if installed on your boat) should be 18 inches diagonally and placed 12 feet above waterline.

- As fog sets in turn on running lights, take bearings and mark your position on the chart while continuing to log your course and speed.

Remember the following guidelines:
Fog is a result of either warm-surface or cold-surface conditions. You can judge the likelihood of fog formation by periodically measuring the air temperature and dew point temperature. If the spread (difference) between these two temperatures is small you likely will incur a fog situation.

- Have someone in the boat assume the responsibility for watching the person in the water and keep them in sight while the boat maneuvers back to them.
- Approach the person into the wind and waves. When alongside, put the engine in neutral and throw them a Type IV PFD with a line attached or extend an oar or boat hook.

SAFETY EQUIPMENT

NOTE: As the owner of the boat, you are responsible for supplying a fire extinguisher approved by the U.S. Coast Guard and all other required safety equipment. Check

Fog

Fog is a result of either warm-surface or cold-surface conditions. You can judge the likelihood of fog formation by periodically measuring the air temperature and dew point temperature. If the spread (difference) between these two temperatures is small you likely will incur a fog situation. Remember the following guidelines:

- As fog sets in turn on running lights, take bearings and mark your position on the chart while continuing to log your course and speed.
- Prompt all persons aboard to put on their PFD (personal flotation device).
- If equipped with sounding equipment, you should take soundings and match them with soundings on your charts.
- Station a person forward on the boat as a lookout.
- Reduce your speed. From time to time stop engine and listen for other fog signals.
- Sound the horn or fog bell intermittently to warn other boaters.
- If there is any doubt in continuing boat movement, anchor. Listen for other fog signals while continuing to sound the fog horn or bell.

Man Overboard

Should someone in the boat fall overboard.

- Act quickly – treat every situation as an emergency.
- Move throttle to idle position and yell “MAN OVERBOARD.”
- Immediately throw a Type IV PFD to the person in the water.

- Have someone in the boat assume the responsibility for watching the person in the water and keep them in sight while the boat maneuvers back to them.
- Approach the person into the wind and waves. When alongside, put the engine in neutral and throw them a Type IV PFD with a line attached or extend an oar or boat hook.

SAFETY EQUIPMENT

NOTE: As the owner of the boat, you are responsible for supplying a fire extinguisher approved by the U.S. Coast Guard and all other required safety equipment. Check state and local regulations and call the U.S. Coast Guard Boating Safety Hotline at 1-800-368-5647 for information about required safety equipment. You should also consider supplying additional equipment recommended for your safety and that of your passengers. Make yourself aware of its availability and its use.

Personal Flotation Devices (PFDs)

United States Coast Guard (USCG) approved wearable personal flotation devices of Type I, II, III or IV must be on board your boat. The PFDs must be of a suitable size for each person aboard and shall be in serviceable condition and readily accessible.

PFD TYPE I, WEARABLE

This PFD has the greatest required buoyancy. Its design allows for turning most unconscious persons in the water from face down position to a vertical or slightly backward position. Type I is most effective for all waters, especially offshore when rescue may be delayed.

PFD TYPE II, WEARABLE

Type II turns its wearer the same as Type I, but the turning action is not as pronounced as the Type I. The Type II will

All hand portable fire extinguishers should be mounted in a readily accessible location, and away from the engine compartment. All persons aboard should know the location and proper operation of the fire extinguisher(s).

If your fire extinguisher has a charge indicator gauge, cold or hot weather may have an effect on the gauge reading. Consult the instruction manual supplied with the fire extinguisher to determine the accuracy of the gauge.

Visual Distress Signal Devices

not turn as many persons under the same conditions as a Type I.

Type III allows the wearers to place themselves in a vertical or slightly backward position. Type III has the same buoyancy as a Type II PFD. It has little or no turning ability.

PFD TYPE III, WEARABLE

PFD TYPE IV, THROWABLE (REQUIRED IN ADDITION TO THE ABOVE MENTIONED PFDs YOU MUST HAVE ONE TYPE IV THROWABLE PFD ON BOARD)

not turn as many persons under the same conditions as a Type I.

PFD TYPE III, WEARABLE

Type III allows the wearers to place themselves in a vertical or slightly backward position. Type III has the same buoyancy as a Type II PFD. It has little or no turning ability.

PFD TYPE IV, THROWABLE (REQUIRED IN ADDITION TO THE ABOVE MENTIONED PFDs YOU MUST HAVE ONE TYPE IV THROWABLE PFD ON BOARD)

The PFD Type IV can be thrown to a person in the water, grasped and held by the user until rescued. The design does not allow for it to be worn. The most common Type IV PFDs are a buoyant cushion or ring buoy. The throwable Type IV PFD shall be immediately available for use and in serviceable condition.

PFD TYPE V WEARABLE

This PFD must be worn to be effective. When inflated, it provides buoyancy equivalent to Type I, II or III PFDs. When it is deflated, however, it may not support some people.

Fire Extinguishers

All Class 1 (16 to 26 feet) powerboats are required to carry one (1) B-I type hand portable fire extinguisher, if not equipped with a fixed (Halon) fire extinguishing system in the engine compartment.

All Class 2 (up to 39.4 feet) powerboats are required to carry two (2) B-I type hand portable fire extinguisher, if not equipped with a fixed (Halon) fire extinguishing system in the engine compartment. When equipped with a fixed (Halon) fire extinguishing system, only one (1) B-I type hand portable fire extinguisher is required.

All hand portable fire extinguishers should be mounted in a readily accessible location, and away from the engine compartment. All persons aboard should know the location and proper operation of the fire extinguisher(s).

If your fire extinguisher has a charge indicator gauge, cold or hot weather may have an effect on the gauge reading. Consult the instruction manual supplied with the fire extinguisher to determine the accuracy of the gauge.

Visual Distress Signal Devices

Visual Distress Signal devices are required and may be of the pyrotechnic or non-pyrotechnic type. The regulation requires all recreational boats when used on coastal waters, which includes the Great Lakes, territorial seas and those waters directly connected to the Great Lakes and the territorial seas, up to a point where the waters are less than two miles wide, and the boats owned in the United States when operating on the high seas, to be equipped with visual distress signal devices.

Pyrotechnic and non-pyrotechnic equipment must be U.S. Coast Guard approved, in serviceable condition and stowed in a readily accessible location. Equipment providing a date for serviceable life, must be within the specified usage date as shown.

PYROTECHNIC EQUIPMENT

Pyrotechnic U.S. Coast Guard approved visual distress signals and associated equipment include:

- Red flares, hand held or aerial
- Orange smoke, hand held or floating
- Launchers for aerial red meteors or parachute flares

No single signaling device is flawless under all conditions for all purposes. Consideration should be given to possessing various types of equipment. Careful selection and proper stowage of the equipment is very **IMPORTANT** if young children are frequently aboard.

- Orange distress flag
- S-O-S Electric distress light

NON-PYROTECHNIC EQUIPMENT

NON-PYROTECHNIC EQUIPMENT

- Orange distress flag
- S-O-S Electric distress light

No single signaling device is flawless under all conditions for all purposes. Consideration should be given to possessing various types of equipment. Careful selection and proper stowage of the equipment is very **IMPORTANT** if young children are frequently aboard.

Sound Signaling Device

All Class 1 (16 to 26 feet) powerboats are required to carry a hand, mouth or power operated horn or whistle. It must produce a blast of two-second duration and audible at a distance of at least one-half (1/2) mile.

All Class 2 (up to 39.4 feet) powerboats are required to carry a hand, mouth or power operated horn or whistle. It must produce a blast of two-second duration and audible at a distance of at least one (1) mile.

Navigation Lights

Boats operating between sunset and sunrise are required to display appropriate navigation lights. All Larson models are equipped with USCG approved lighting.

ADDITIONAL RECOMMENDED EQUIPMENT

The following list (not an exhaustive list) indicates some additional recommended equipment which should be considered for safe enjoyable boating.

Tools

- Spark plug wrench
- Screw drivers
- Hammer
- Jackknife

Basic Gear

- Extra Bulbs
- Extra fuses
- Extra drain plug
- Shearpin (if used)

Spare Parts

- Pliers
- Adjustable wrench

Spare Parts

- Extra Bulbs
- Extra fuses
- Extra drain plug
- Shearpin (if used)
- Spare Propeller
- Extra prop nut and washer
- Spark plugs
- Spare wire

Basic Gear

- Anchor and Line
- Tow line
- Mooring lines
- Dock Fenders
- First aid kit
- Foul weather gear
- VHF radio
- Searchlight
- Ring buoy
- Flashlight
- Oar or paddle
- Compass
- Distress signals
- Boat hook
- Charts or navigation maps
- Signal mirror
- Sunburn lotion
- Binoculars

BOATING LAWS & REGULATIONS

Boat Registration

Federal and state laws require that every boat equipped with propulsion machinery of any type must be registered in the main state of usage. Registration numbers and validation stickers must be displayed on the boat according to regulations. The registration certificate must be carried on board when the boat is in use.

Discharge of Oil

The Federal Water Pollution Control Act prohibits the discharge of oil or oily waste into or upon the navigable waters of the United States or the waters of the contiguous zone if such discharge causes a film or sheen upon or a discoloration of the surface of the water or causes a sludge

The U.S. Coast Guard has issued these regulations to implement Annex V of the International Convention for the Prevention of Pollution from Ships, 1973, commonly known as Annex V of the MARPOL (Marine Pollution) Treaty 73/78. They apply to all U.S. vessels wherever they operate (except waters under the exclusive jurisdiction of a State), and foreign vessels operating in U.S. waters out to and including the Exclusive Economic Zone (200 miles).

- **PLASTIC**

or emulsion beneath the surface of the water. Violators are subject to a penalty of \$5,000.

Disposal of Plastics & Other Garbage

Plastic refuse dumped in the water can kill fish and marine wildlife, and can foul vessel propellers and cooling water intakes. Other forms of waterborne garbage can litter our beaches and make people sick. U.S. Coast Guard regulations completely prohibit the dumping of plastic refuse or other garbage mixed with plastic into the water anywhere, and restrict the dumping of other forms of garbage within specified distances from shore.

ILLEGAL TO DUMP

INSIDE 3 MILES (and in U.S. Lakes, Rivers, Bays and Sounds)

- **PLASTIC**
- **DUNNAGE, LINING AND PACKING MATERIALS THAT FLOAT**
- **ANY GARBAGE EXCEPT DISHWATER/GRAYWATER/FRESH FISH PARTS**

3 TO 12 MILES

- **PLASTIC**
- **DUNNAGE, LINING AND PACKING MATERIALS THAT FLOAT**
- **ANY GARBAGE NOT GROUND TO LESS THAN ONE SQUARE INCH**

12 TO 25 MILES

- **PLASTIC**
- **DUNNAGE, LINING AND PACKING MATERIALS THAT FLOAT**

OUTSIDE 25 MILES

Plastic refuse dumped in the water can kill fish and marine wildlife, and can foul vessel propellers and cooling water intakes. Other forms of waterborne garbage can litter our beaches and make people sick. U.S. Coast Guard regulations completely prohibit the dumping of plastic refuse or other garbage mixed with plastic into the water anywhere, and restrict the dumping of other forms of garbage within specified distances from shore.

Disposal of Plastics & Other Garbage

or emulsion beneath the surface of the water. Violators are subject to a penalty of \$5,000.

- **PLASTIC**

The U.S. Coast Guard has issued these regulations to implement Annex V of the International Convention for the Prevention of Pollution from Ships, 1973, commonly known as Annex V of the MARPOL (Marine Pollution) Treaty 73/78. They apply to all U.S. vessels wherever they operate (except waters under the exclusive jurisdiction of a State), and foreign vessels operating in U.S. waters out to and including the Exclusive Economic Zone (200 miles).

The regulations require U.S. recreational boaters, if your boat is 26 feet or more in length, to affix one or more USCG Trash Dumping Restrictions placards to your boat. The placard warns against the discharge of plastic and other forms of garbage within the navigable waters of the United States, and specify discharge restrictions beyond the territorial sea (the territorial sea generally ends 3 nautical miles from the seashore). In addition, the placard must contain the warning that a person who violates these requirements is liable to civil (\$25,000) and criminal (imprisonment) penalties . The placard also must note that State and local regulations may further restrict the disposal of garbage.

Operators shall display one or more placards in a prominent location and in sufficient numbers, so they can be observed and read by crew and passengers. These locations might include embarkation points, food service areas, galleys, garbage handling spaces, and common deck spaces frequented by crew and passengers. We recommend that these placards be installed on all boats. The placards may be purchased from local marinas, boat dealerships and marine equipment suppliers. A special placard is available for boats operating on the Great Lakes.

IMPORTANT: It is illegal to discharge waste from your marine sanitary device into the water in most areas. It is your responsibility to be aware of and adhere to all local laws concerning waste discharge. Consult with the coast guard, local marina, or your Larson dealer for additional information.

Radio	Drive Unit	General
Name _____ Address _____ Phone _____ Fax _____ Service Manager _____	Name _____ Address _____ Phone _____ Fax _____ Sales Manager _____	Name _____ Address _____ Phone _____ Fax _____ Service Manager _____

LARSON BOAT LOG

LARSON BOAT LOG

Purchase Dealership	Service Dealership
Name _____ Sales Manager _____	Name _____ Service Manager _____
Address _____ Phone _____	Address _____ Phone _____
_____ Fax _____	_____ Fax _____

General	Drive Unit	Radio
Model Name _____ State of Registration _____ Hull Identification Number _____ Boat Name _____ Hull Color(s) _____ Length _____ Beam _____ Weight _____ Draft (Drive Down) _____ Draft (Drive Up) _____ Freeboard (Fore) _____ Freeboard (Aft) _____	Serial Number _____ Fuel System Tank Capacity _____ Filter Type _____ Fresh Water Tank Capacity _____ Propeller Manufacturer _____ Pitch _____ Model Number _____ Battery Manufacturer _____ Model Number _____	Manufacturer _____ Type _____ Model Number _____ Serial Number _____ Key Numbers Cabin _____ Glove Box _____ Ignition _____
Engine Manufacturer _____ Model Name/Number _____ Oil Type/SAE _____ Quarts _____ Filter Type _____ Serial Number _____ Transom Plate Serial Number _____		

Complete this page before going boating and leave it with a reliable person who can be depended upon to notify the Coast Guard or other rescue organization should you not return as scheduled. Do not file this plan with the Coast Guard. Name and phone number of person on shore with whom this form has been filed.

Automobile License _____
 Type _____ Trailer license _____
 Color _____ and make of auto _____
 Where parked _____

Do any of the persons aboard have a medical problem?
 Yes No If yes, what? _____

Persons aboard _____
 Name _____ Age _____ Address & Telephone No. _____
 Captain: _____

The boat listed below should return by: _____
 Date _____ Time _____
 at the latest. If it has not, please call the emergency numbers listed below.

Police _____
 Coast Guard _____
 Other Authority _____
 Personal _____

LARSON CRUISE LOG

LARSON CRUISE LOG

Complete this page before going boating and leave it with a reliable person who can be depended upon to notify the Coast Guard or other rescue organization should you not return as scheduled. Do not file this plan with the Coast Guard. Name and phone number of person on shore with whom this form has been filed

Automobile License _____
 Type _____ Trailer license _____
 Color _____ and make of auto _____
 Where parked _____

Persons aboard _____
 Name _____ Age _____ Address & Telephone No. _____
 Captain: _____

Do any of the persons aboard have a medical problem?
 Yes No If yes, what? _____

The boat listed below should return by: _____
 Date _____ Time _____
 at the latest. If it has not, please call the emergency numbers listed below.

Police _____
 Coast Guard _____
 Other Authority _____
 Personal _____

Trip Information

Departure Date/Time _____ Departure Location _____
 Destination(s) _____
 Destination(s) _____
 Destination(s) _____

Boat Description

Boat Name _____ Type _____
 State Registration Number _____ **Larson** Manufacturer _____
 Length _____
 Hull Color(s) _____ Deck Color(s) _____
 Cabin (Color) _____ Trim (Color) _____
 Other Physical Characteristics _____

Engine

Type _____ HP _____
 Fuel Type _____ Fuel Capacity _____

Safety & Emergency Equipment (YES/NO & NUMBER)

Life Jackets _____	Cushions _____	Distress Light _____
Flares _____	Smoke Signals _____	Flashlight _____
Mirror _____	Paddles _____	Anchor _____
Food _____	Water _____	Life Raft _____

Radio

On board (Yes/No) _____ Type _____

 Frequencies usually used or monitored _____

Passenger List (Use Another Sheet If Necessary)


Full Name
Age/Sex
Phone Number
Complete Address

Full Name
Age/Sex
Phone Number
Complete Address

Full Name
Age/Sex
Phone Number
Complete Address

Full Name
Age/Sex
Phone Number
Complete Address

ALWAYS FILL THIS SHEET OUT COMPLETELY—IN AN EMERGENCY ALL INFORMATION MAY BE HELPFUL




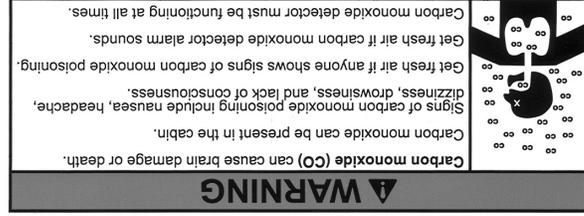


This section introduces information related to major systems and components that are or can be installed on your Larson boat.

You will see equipment safety labels at various locations on your boat. Larson Boats has displayed these labels to alert you to potentially hazardous situations. Please do your part by reading ALL safety labels. Understanding the information on these labels is of vital importance. Check with your dealer if you have any questions about the labels.

This section introduces information related to major systems and components that are or can be installed on your Larson boat.

You will see equipment safety labels at various locations on your boat. Larson Boats has displayed these labels to alert you to potentially hazardous situations. Please do your part by reading ALL safety labels. Understanding the information on these labels is of vital importance. Check with your dealer if you have any questions about the labels or if they are missing from your boat. These safety labels should be on your boat:

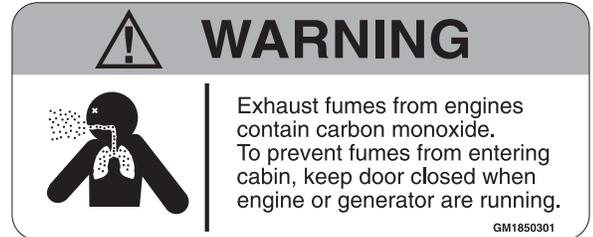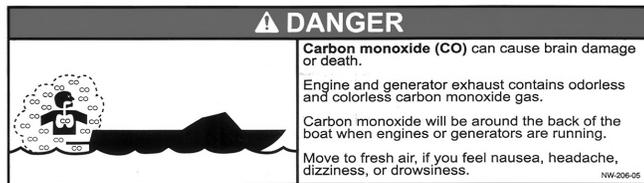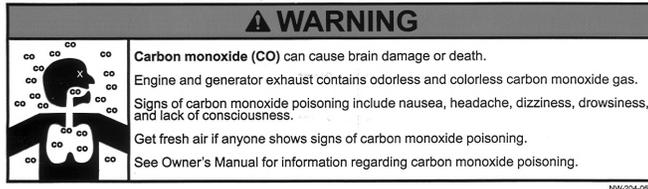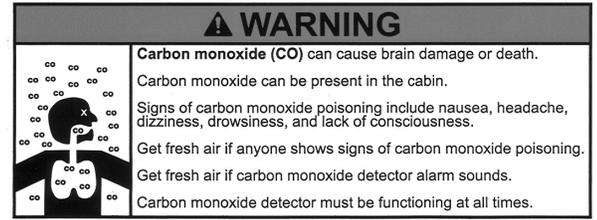

CUDDY/BOWRIDER SAFETY LABELS

GM1850701

Fuel vapors are a fire and explosion hazard. To avoid injury or death, do not store fuel or flammable liquids here.



WARNING



GM1850901

Rotating propeller can cause serious injury or death. Shut off motor when near persons in water.



WARNING



WARNING




Rotating propeller can cause serious injury or death. Shut off motor when near persons in water.

GM1850901

WARNING




Fuel vapors are a fire and explosion hazard. To avoid injury or death, do not store fuel or flammable liquids here.

GM1850701

WARNING




To minimize shock and fire hazards:

- (1) Turn off the boat's shore connection switch before connecting or disconnecting shore cable.
- (2) Connect shore power cable at the boat first.
- (3) If polarity warning indicator is activated, immediately disconnect cable.
- (4) Disconnect shore power cable at shore outlet first.
- (5) Close shore power inlet cover tightly.

DO NOT ALTER SHORE POWER CONNECTORS

GM1850401

WARNING

GASOLINE VAPORS CAN EXPLODE

BEFORE STARTING ENGINE

*CHECK ENGINE COMPARTMENT FOR GASOLINE VAPORS.

*OPERATE BLOWER FOR 4 MINUTES.

RUN BLOWER BELOW CRUISING SPEED

ALL STERN DRIVE MODELS

WARNING




Do not use ski tow fitting for lifting or parasailing. Fitting could pull out of deck resulting in serious injury or death.

GM1850801

WARNING




Avoid serious injury or death from fire or explosion, resulting from leaking fuel. Inspect system for leaks at least once a year.

GM1850601

CUDDY/BOWRIDER SAFETY LABELS

CAUTION: READ ALL literature materials supplied with your boat prior to operating any of the systems and components. Any electrical accessories you would like to add to your boat should be installed by your dealer or a qualified electrician. Improper installation could result in damage to your boat's electrical system and/or cause a fire.

CAUTION

SYSTEMS

WARNING



Prevent falls overboard. Do not occupy platform above trolling speed. Make sure latches are closed securely.



WARNING



WARNING

Prevent falls overboard. Do not occupy platform above trolling speed. Make sure latches are closed securely.

GM1851301

WARNING

Prevent falls overboard. Close, latch and stay inside gate(s) while underway.

GM1851101

WARNING

Exhaust fumes from engines contain carbon monoxide. Boats with canvas deployed are more likely to collect exhaust fumes. Avoid brain damage or death from carbon monoxide. Keep cockpit and cabin areas well ventilated. Signs of exposure include nausea, dizziness, and drowsiness.

SEE OWNERS MANUAL FOR MORE INFORMATION.

ALL CANVAS ENCLOSURES

CUDDY/BOWRIDER SAFETY LABELS

SYSTEMS

CAUTION


CAUTION: READ ALL literature materials supplied with your boat prior to operating any of the systems and components. Any electrical accessories you would like to add to your boat should be installed by your dealer or a qualified electrician. Improper installation could result in damage to your boat's electrical system and/or cause a fire.

IMPORTANT: Operation, maintenance, and safety information is outlined by the manufacturer of most installed equipment. Properly operating and maintaining the equipment on your boat will help you to enjoy many years of **SAFE** boating.

12-Volt DC Electrical System

Your boat's 12-Volt DC system obtains its power from a battery. The battery is charged through the engine-driven alternator and/or an AC battery charger. The voltmeter on the helm dash instrument panel indicates the charging level of the battery. Some boats are equipped with a battery switch and the operation of this switch is described later in this section. Depending on which Larson Boat model you own, there could be fuses and/or circuit breakers (with indicator lights) on either the distribution panel or instrument panel, that control the operation of DC equipment on your boat.

The negative terminal of the battery is connected to the grounding studs of the main engine. This type of negative ground system is the approved system for marine DC electrical systems. If additional equipment is to be installed, it must be adaptable to the negative ground system. When installing additional equipment, ensure

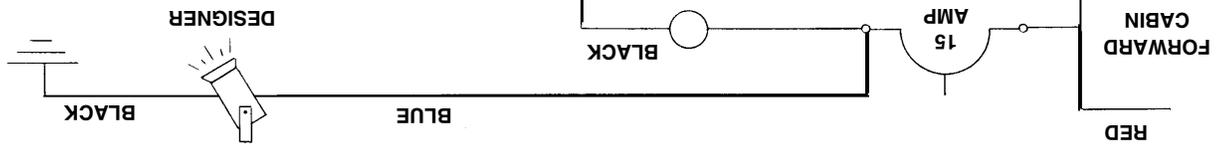

NOTE: Power feeds for accessory equipment must NOT be taken from the voltmeter terminals.

A typical 12-Volt DC cabin schematic is shown in Figure 2.1. Consult your Larson dealer for additional DC power requirements on your Larson model.

that each item's current supply is taken from the main DC distribution panel. All required additional circuit protection must also be added at the DC distribution panel.

that each item's current supply is taken from the main DC distribution panel. All required additional circuit protection must also be added at the DC distribution panel.

A typical 12-Volt DC cabin schematic is shown in Figure 2.1. Consult your Larson dealer for additional DC power requirements on your Larson model.

NOTE: Power feeds for accessory equipment must NOT be taken from the voltmeter terminals.

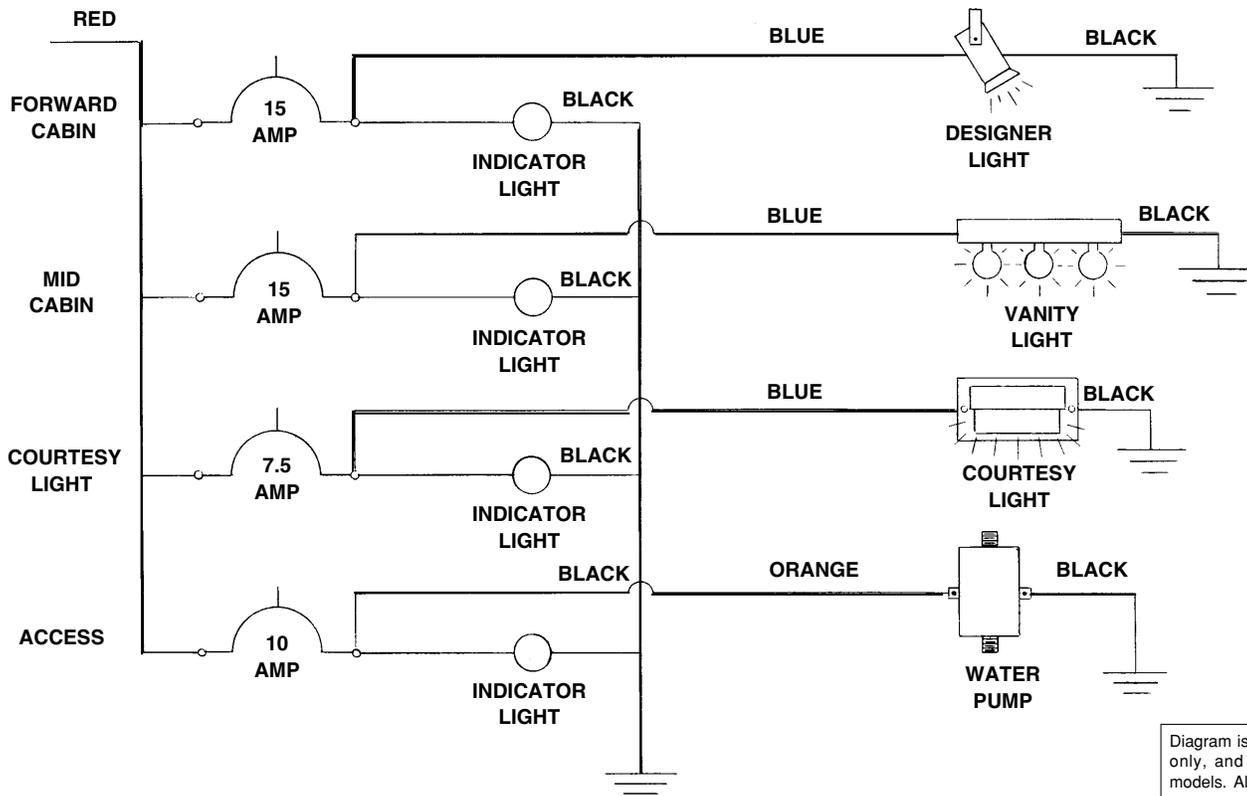


Diagram is for general reference only, and is not specific to all models. All electric system work should only be performed by a qualified marine electrician.

FIGURE 2.1 - TYPICAL 12-VOLT DC CABIN SCHEMATIC

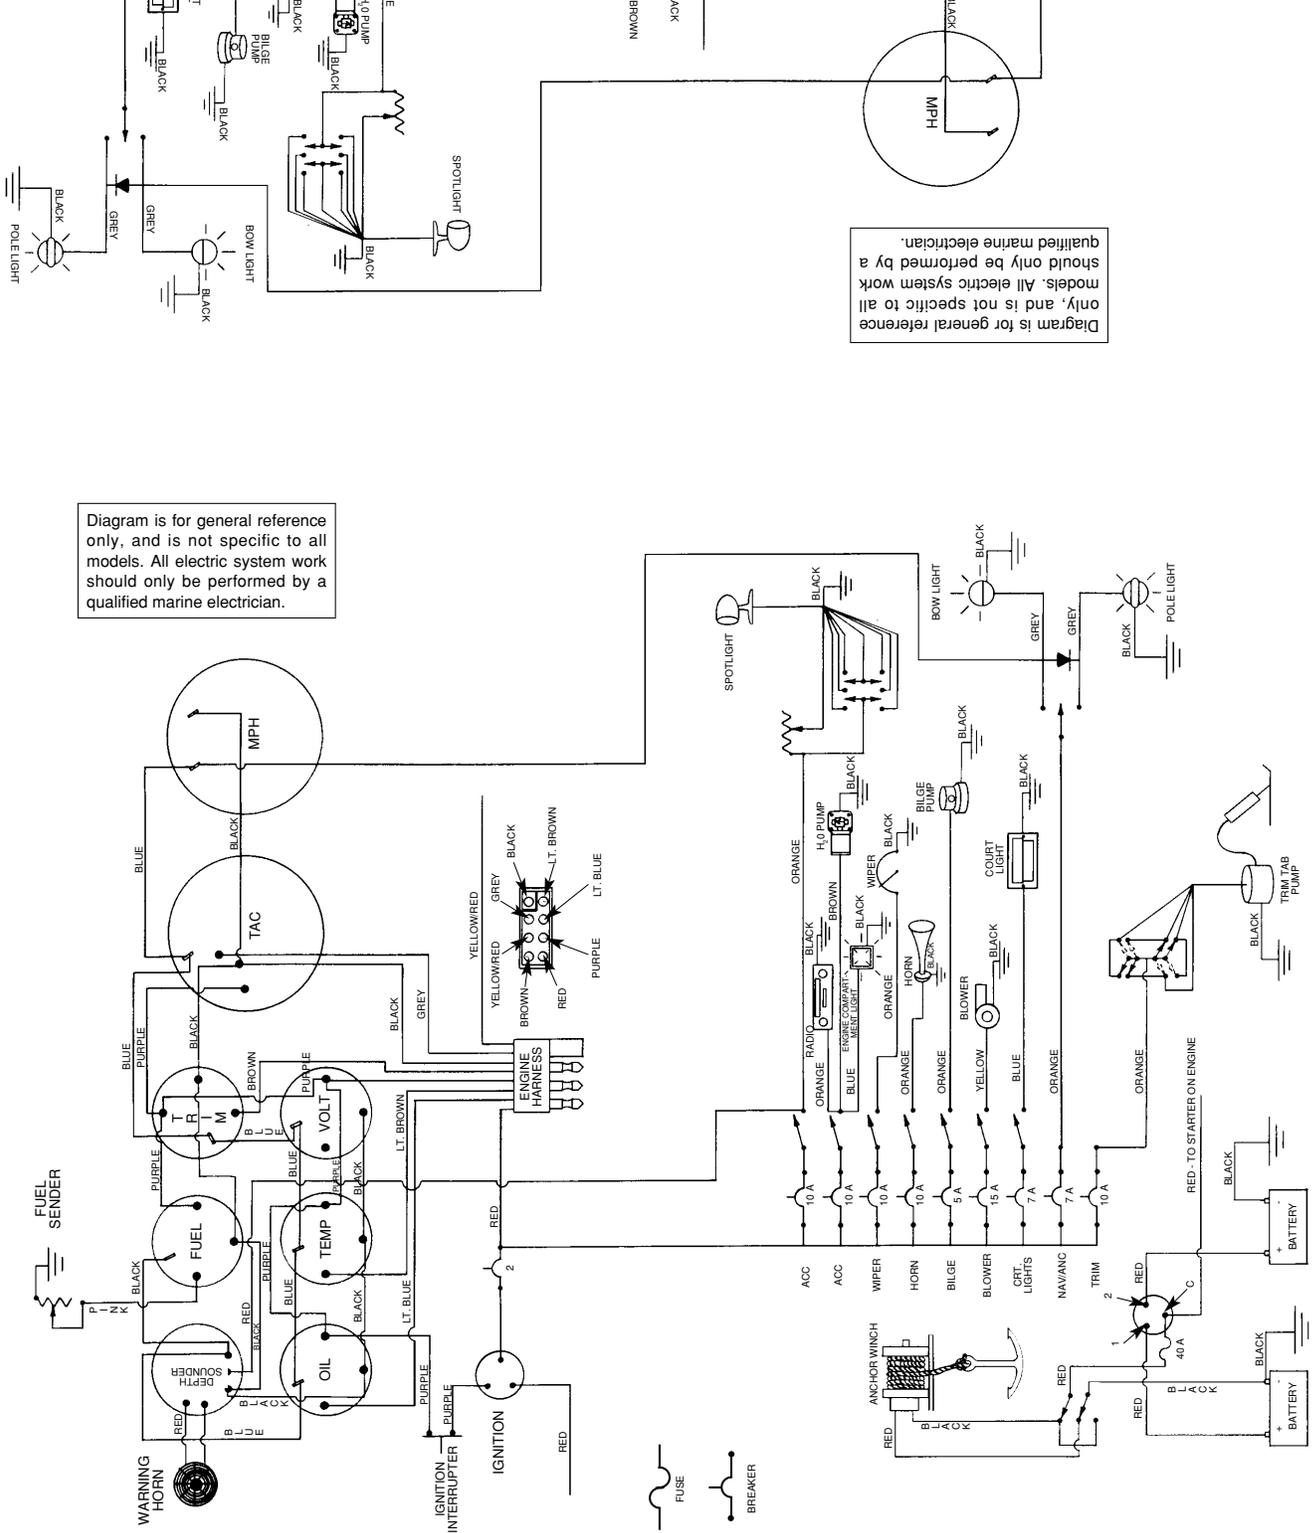


Diagram is for general reference only, and is not specific to all models. All electric system work should only be performed by a qualified marine electrician.

Diagram is for general reference only, and is not specific to all models. All electric system work should only be performed by a qualified marine electrician.

FIGURE 2.2 - TYPICAL SINGLE ENGINE SCHEMATIC


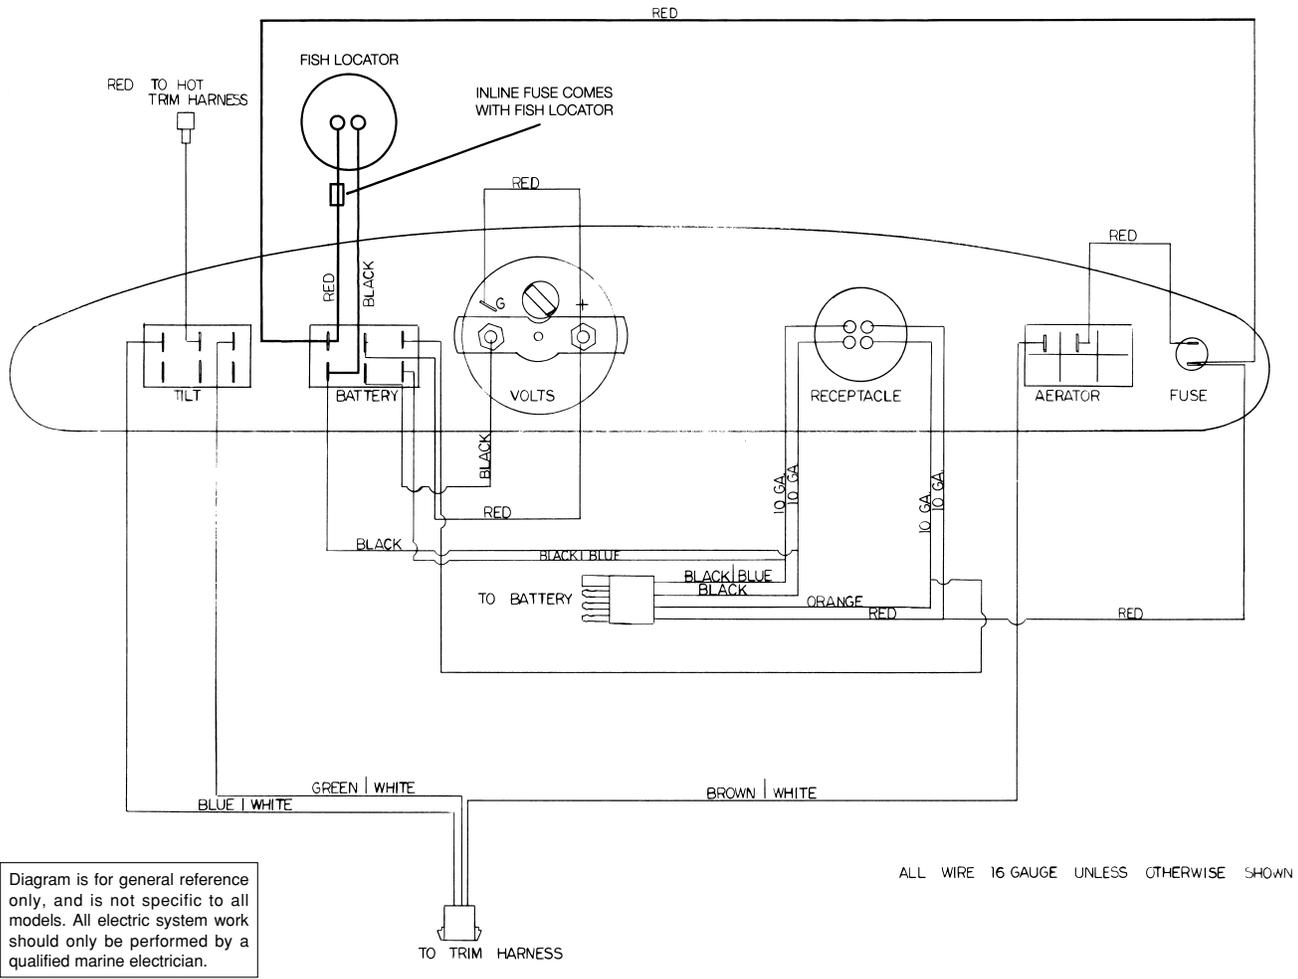


FIGURE 2.3 - SKI'n FISH BOW PANEL

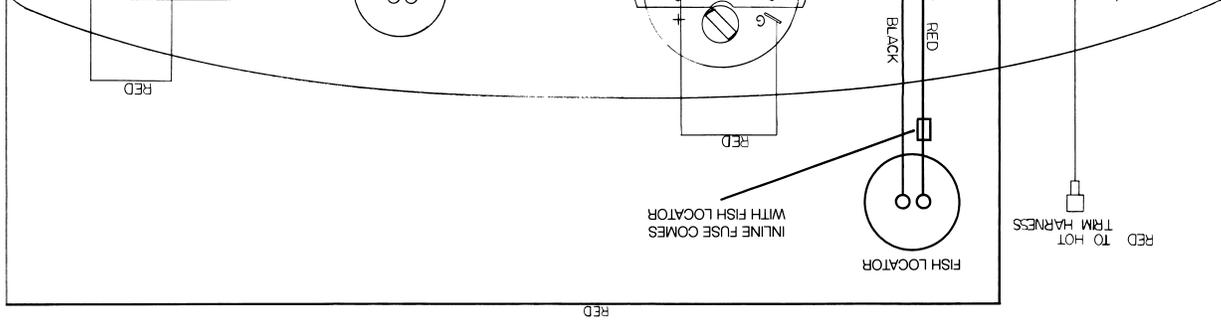

5. **Fuel Tank** – The internal fuel tank is accessible through the engine compartment or below a removable cover board and is equipped with a fuel vent line, fuel fill line, sending unit, and engine fuel pickup as shown in Figure 2.4.
4. **Fuel Filter** – The fuel filter supplied by engine manufacturers is installed on or near the engine. The filter should be replaced frequently to maintain an adequate supply of clean, uncontaminated fuel to the engine.
3. **Anti-Siphon Valve** – Engine fuel pick up lines on I/O boats are equipped with an anti-siphon valve where the line attaches to the internal fuel tank. The valve prevents gasoline from siphoning out of the fuel tank in the event of a fuel line separation. (This does not apply to O/B boats.)

Electrical Wiring Diagrams

The electrical schematics shown in Figures 2.1, 2.2, and 2.3 are typical illustrations and are provided to explain how electric components on your boat are connected to the DC power source. These schematics are for general reference only and are not model specific.

See your dealer for all electrical system service work or to add any electrical equipment to your boat. Do not attempt to work on your boat's electrical system. All electrical system work should only be performed by a qualified marine technician.

Fuel System (Figure 2.4)

The internal fuel system on board your Larson boat is designed to meet or exceed federal requirements, at the time of manufacture, of the U.S. Coast Guard.

The fuel system has been factory inspected and pressure tested in accordance with regulations in effect at time of manufacture. Additionally, each fuel tank must pass rigid tests and inspections performed by the fuel tank manufacturer.


Before you take delivery of your boat, check that your dealer completes a full inspection of the entire fuel system. You should also inspect the entire system at least once a year.

1. **Fuel Fill Plate** – All Larson boats having an internal fuel tank are equipped with a fuel fill plate and are labeled GAS or DIESEL. Be sure to utilize the proper grade fuel as specified in your engine owner's manual.
2. **Fuel Vent** – The internal fuel tank is vented overboard or back to the fuel tank. While the tank is being filled, the air is expelled by the fuel and escapes through the fuel vent. When the fuel tank is almost FULL, fuel will be ejected from the fuel vent.

Electrical Wiring Diagrams

The electrical schematics shown in Figures 2.1, 2.2, and 2.3 are typical illustrations and are provided to explain how electric components on your boat are connected to the DC power source. These schematics are for general reference only and are not model specific.

3. **Anti-Siphon Valve** – Engine fuel pick up lines on I/O boats are equipped with an anti-siphon valve where the line attaches to the internal fuel tank. The valve prevents gasoline from siphoning out of the fuel tank in the event of a fuel line separation. (This does not apply to O/B boats.)
4. **Fuel Filter** – The fuel filter supplied by engine manufacturers is installed on or near the engine. The filter should be replaced frequently to maintain an adequate supply of clean, uncontaminated fuel to the engine.
5. **Fuel Tank** – The internal fuel tank is accessible through the engine compartment or below a removable cover board and is equipped with a fuel vent line, fuel fill line, sending unit, and engine fuel pickup as shown in Figure 2.4.

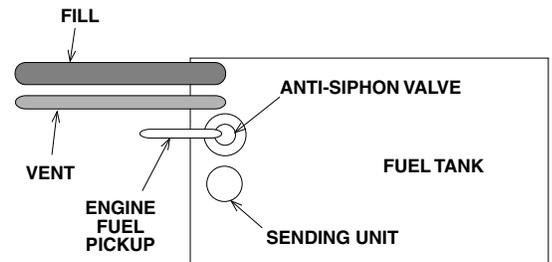


NOTE: Fill and Vent and Sender location varies by model. See dealer for location.

FIGURE 2.4 – FUEL SYSTEM

Engine Exhaust System

The engine exhaust system removes harmful gas created by the engine during combustion. Inspect the system for leaks before each use of the boat. Make sure all hose clamps and connections are tight and there are no cracks in any exhaust system component that would allow carbon monoxide gases to escape.

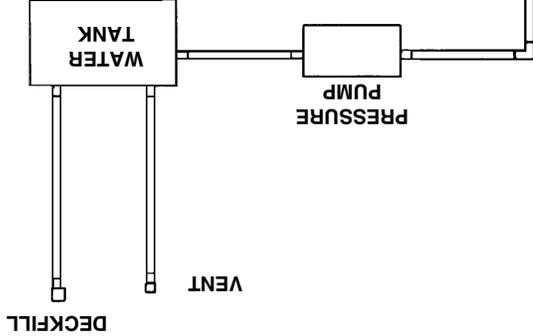

Some models are equipped with exhaust diverters. This two position valve directs the engine exhaust either to thru hull exhaust pipes or down through the propeller hub. Directing the exhaust to the thru hull pipes results in more engine power and a higher noise level. Do not operate your boat near shore while using the thru hull option, due to the noise level. Directing the exhaust to the propeller hub where it is released under water, results in quieter operation. Always use this option in marinas, near shore, or near anyone who may be bothered by an increased noise level. Always check local regulations regarding noise restrictions.

Some models are equipped with exhaust diverters. This two position valve directs the engine exhaust either to thru hull exhaust pipes or down through the propeller hub.

Directing the exhaust to the thru hull pipes results in more engine power and a higher noise level. Do not operate your boat near shore while using the thru hull option, due to the noise level.

Directing the exhaust to the propeller hub where it is released under water, results in quieter operation. Always use this option in marinas, near shore, or near anyone who may be bothered by an increased noise level. Always check local regulations regarding noise restrictions.

See your dealer for operational instructions on optional exhaust systems.

Fresh-Water System

The fresh-water system provides water for drinking. A fresh water holding tank provides an onboard supply of fresh water. The holding tank is filled through a fill plate and is vented to allow air to enter and escape as water levels change.

The plumbing provides ambient (not cold or refrigerated) temperature water from the holding tank to the galley sink. A typical plumbing diagram is shown in Figure 2.5.

IMPORTANT: Fill tank only with fresh-water. Using and refilling the tank often will help keep it a source of fresh and clean drinking water.

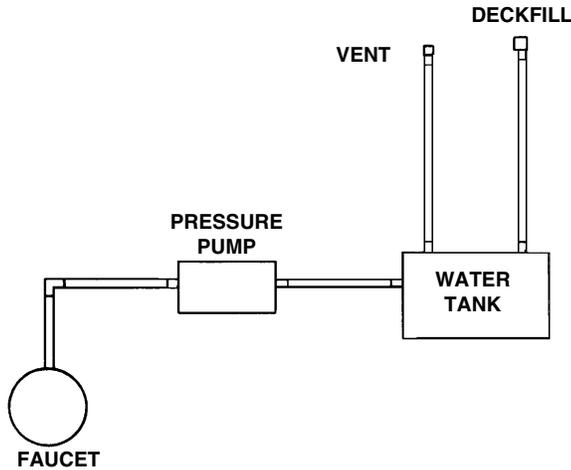


FIGURE 2.5 – TYPICAL PLUMBING DIAGRAM

SANITIZING FRESH-WATER SYSTEM

The fresh-water system should be sanitized **before initial use**, after winter storage, or when system has not been used for extended periods of time.



CAUTION: Notify all persons aboard that the fresh water system is being sanitized. **Do not** allow anyone to drink from the fresh water system during the sanitizing process.

1. Partially fill the fresh-water holding tank with approximately four (4) gallons of fresh water.
- IMPORTANT:** The fresh-water system should be sanitized before initial use. See previous text information.
- INITIAL START-UP*
- IMPORTANT:** Thoroughly flush entire system with fresh water after treatment.
3. Drain entire system and flush with fresh water.

1. In an appropriate size container, make a solution of 1-1/4 cups (10 oz.) of household bleach and 5 gallons (19 liters) of fresh water. For fresh water capacities greater than 5 gallons, increase quantity of bleach by 1/4 cup (2 oz.) per gallon (i.e., 10 gallons of fresh water, add 2-1/2 cups or 20 ounces of bleach).
 2. Place solution into empty tank, then fill to capacity with fresh water.
- NOTE:** Fresh water tank must be empty before beginning sanitizing process. If necessary, empty the tank.

NOTE: Fresh water tank must be empty before beginning sanitizing process. If necessary, empty the tank.

1. In an appropriate size container, make a solution of 1-1/4 cups (10 oz.) of household bleach and 5 gallons (19 liters) of fresh water. For fresh water capacities greater than 5 gallons, increase quantity of bleach by 1/4 cup (2 oz.) per gallon (i.e., 10 gallons of fresh water, add 2-1/2 cups or 20 ounces of bleach).
2. Place solution into empty tank, then fill to capacity with fresh water.
3. Treated water solution should remain in tank for 3 to 4 hours.
4. Turn fresh water pump ON. Open all faucets, beginning with faucet located farthest from pump, to bleed air from entire fresh water system.
5. Drain treated water solution from tank and lines.
6. Flush entire system with fresh water.

IMPORTANT: Thoroughly flush entire system with fresh water after each sanitizing process.

If excessive chlorine taste is present in fresh-water system after sanitizing, perform the following:

1. Pour a solution of 1 quart (approx. 1 liter) of vinegar and 5 gallons (19 liters) of fresh water into tank.
2. Allow solution to stand in tank for several days.

CAUTION

CAUTION: Notify all persons aboard that the fresh-water system is being treated. **Do not** allow anyone to drink from the fresh water system during the treatment.

3. Drain entire system and flush with fresh water.

IMPORTANT: Thoroughly flush entire system with fresh water after treatment.

INITIAL START-UP

IMPORTANT: The fresh-water system should be sanitized before initial use. See previous text information.


1. Partially fill the fresh-water holding tank with approximately four (4) gallons of fresh water.
2. Turn Fresh-Water Breaker to ON position. Breaker is located on main distribution panel.
3. Open cold water galley faucet to allow air to escape. Close faucet when steady flow of water is visible.
4. Fill fresh-water holding tank to capacity.

Automatic Fire Suppression System

Your boat may be equipped with an automatic fire suppression system in the engine compartment. This system uses a fire extinguishing agent. A heat-sensitive automatic nozzle releases the agent as a vapor, cutting off the supply of oxygen to the fire. The system's indicator light is illuminated when the system is fully charged. When the system is discharged, the indicator light will go out. The light is on the dash or a separate monitoring panel, depending on boat model.

WARNING

WARNING: If system discharges, immediately turn OFF engine, bilge blower(s), and electrical systems. Extinguish all smoking materials. Do not open engine compartment. Fresh air supplies oxygen to fire and fire may flash back through opening.



IMPORTANT: It is illegal to discharge waste from your marine sanitary device into the water in most areas. It is your responsibility to be aware of and adhere to all local laws concerning waste discharge. Consult with the Coast Guard, local marina, or your Larson dealer for additional information.

If the system discharges, do not open engine compartment for at least 15 minutes. Hot metals or fuel can also begin cooling during this time. Cautiously inspect compartment for cause of fire and damage to equipment. Have portable extinguishers readily available. *Do not breathe fire caused fumes or vapors.*

Protection Against Electrolysis

IMPORTANT: It is the boat owner's responsibility to periodically inspect and replace the sacrificial zinc anodes. Damage resulting from electrolytic corrosion is not covered by the Larson Boats Warranty.

Sacrificial zinc anodes, installed by the dealer or the engine manufacturer, protect the hardware that is exposed to the water. Electrolysis attacks the softest or least "noble" metals first. Because zinc is a less "noble" metal, it will decompose before the more "noble" metals. Check these zinc anodes periodically and have them replaced as required. See your Larson dealer for parts and service.

Zinc is also used to protect metal that is exposed to salt water. The salt causes a galvanic action that decomposes metals.

Marine Sanitation Device (MSD)

The Marine Sanitation Device (MSD), or head, installed on your Larson boat is a marine head (See Figure 2.6). This portable toilet (porta potti) provides simple operation and convenient disposal of waste. The waste is either transported off the boat by removing the holding tank, or by using the pump-out plate at dockside, if so equipped.

IMPORTANT: It is illegal to discharge waste from your marine sanitary device into the water in most areas. It is your responsibility to be aware of and adhere to all local laws concerning waste discharge. Consult with the Coast Guard, local marina, or your Larson dealer for additional information.

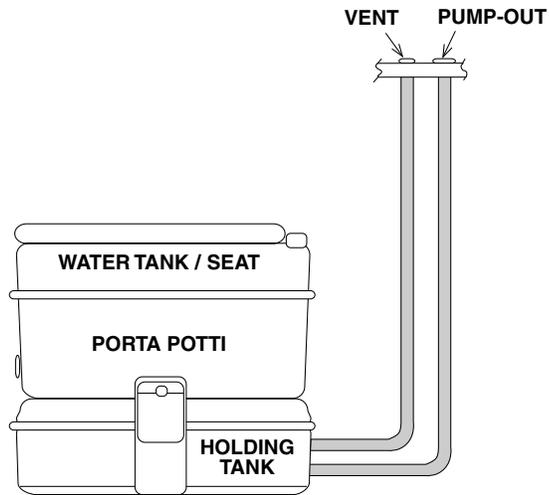



FIGURE 2.6 – ENCLOSED MARINE HEAD WITH PUMP-OUT

IMPORTANT: It is the boat owner's responsibility to periodically inspect and replace the sacrificial zinc anodes. Damage resulting from electrolytic corrosion is not covered by the Larson Boats Warranty.

Protection Against Electrolysis

extinguishers readily available. *Do not breathe fire caused fumes or vapors.*

If the system discharges, do not open engine compartment for at least 15 minutes. Hot metals or fuel can also begin cooling during this time. Cautiously inspect compartment for cause of fire and damage to equipment. Have portable extinguishers readily available. *Do not breathe fire caused fumes or vapors.*

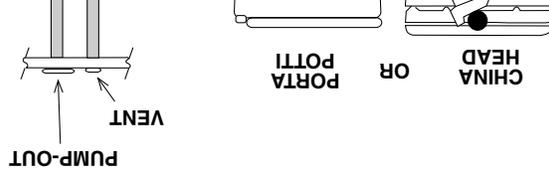

CHINA HEAD OR MACERATOR HEAD TO OVERBOARD DISCHARGE (SEE FIGURE 2.7)

CHINA HEAD OR MACERATOR HEAD TO OVERBOARD DISCHARGE (SEE FIGURE 2.7)

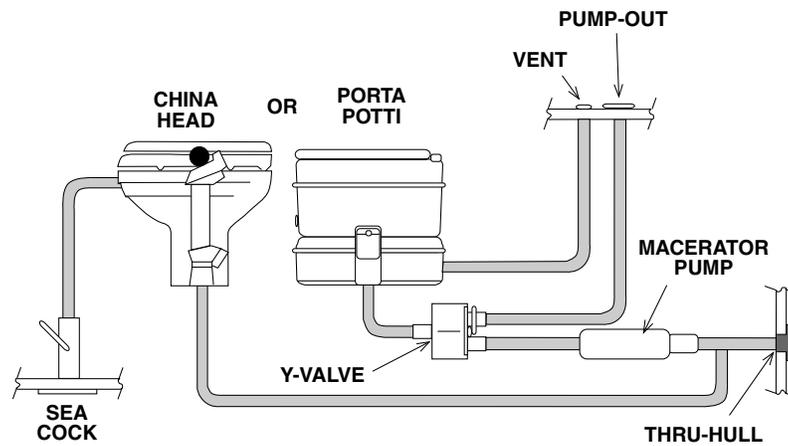


FIGURE 2.7 - CHINA HEAD OR MACERATOR HEAD TO OVERBOARD DISCHARGE

This porta potti version operates the same as the porta potti referenced in Figure 2.6, with some variances. By incorporating a Y-Valve into this system, waste can either be sent to the dockside pump-out plate, or to the macerator pump and discharged overboard.

This china head version relies on seawater drawn through a seacock thru-hull fitting for flushing waste directly overboard. The seacock must be open when flushing the head, and closed when the boat is unattended.

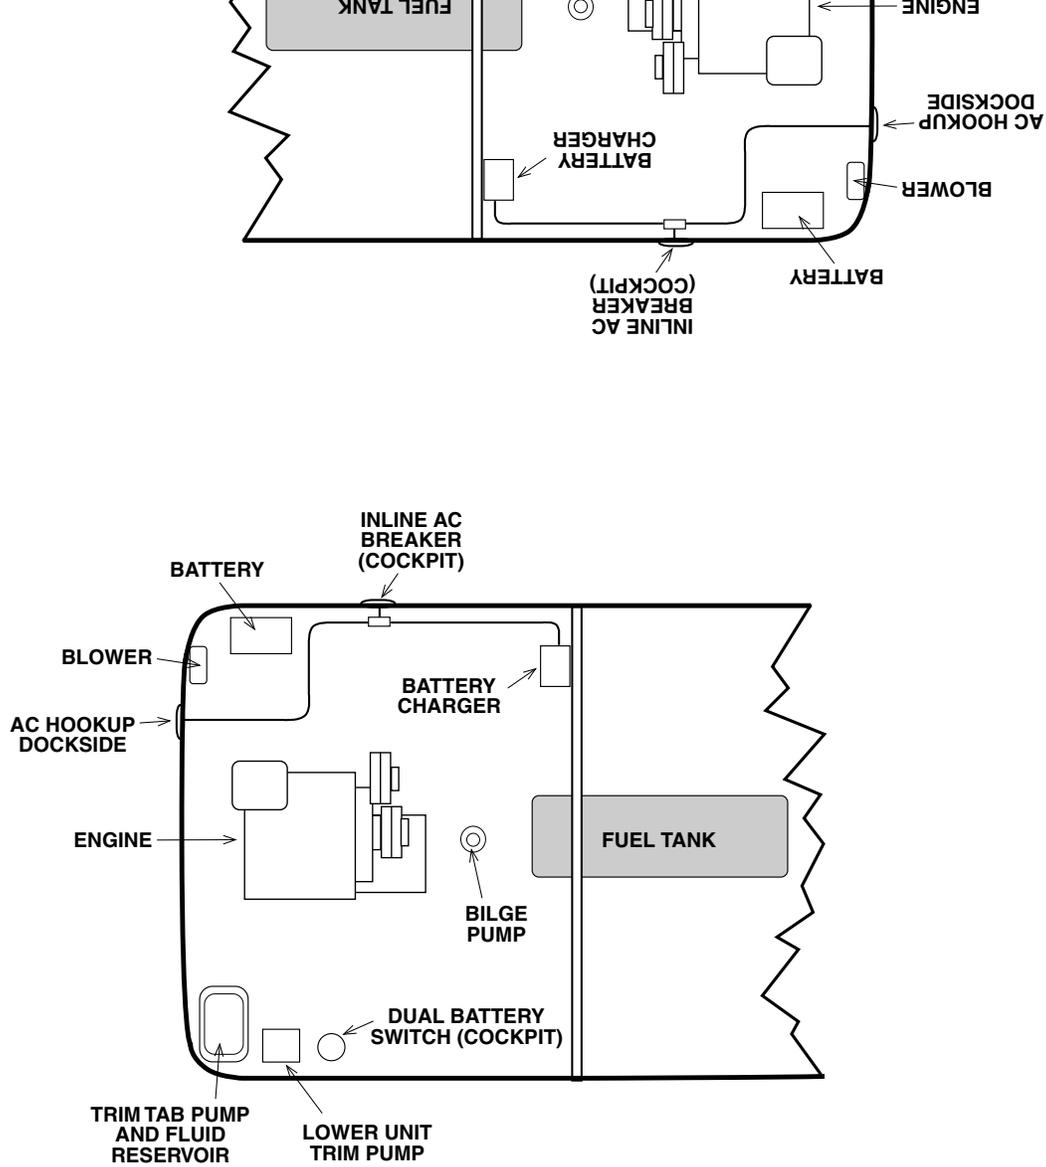


FIGURE 2.8 – TYPICAL SINGLE ENGINE COMPARTMENT

COMPONENTS

The single engine compartment shown in Figure 2.8 provides a means of locating components located within your boat. Your boat may be configured slightly differently depending upon the model and optional equipment installed.

⚠ WARNING

WARNING: When using electrical components, observe basic safety precautions to reduce the risk of fire, electrical shock, personal injury or damage to your boat and/or component. To avoid explosion, do not connect or disconnect battery cables if gasoline fumes are present.

Dual Battery Switch and Optional Refrigerator

The dual battery switch enables DC power to be used from one or two batteries. Power to the engine and all 12 volt electrical equipment, except the **automatic bilge pump and optional refrigerator**, is controlled by the dual battery switch. The optional refrigerator has an ON/OFF switch. The dual battery switch settings available are OFF, 1, 2, and ALL.

Battery

Marine batteries are completely sealed using an absorbent electrolyte principle to provide high reserve capacity, plus cold cranking performance.

If more than one (1) battery is being installed, all batteries are electrically isolated from one another. When the engine is running, each battery is charged automatically and independent of the other. This provides complete freedom of battery selection for power use plus alternator protection supplied by an isolator.

⚠ WARNING

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.

Batteries produce hydrogen and oxygen gases when being charged. These explosive gases escape through the vent/fill caps and may form an explosive atmosphere around the battery if ventilation is poor. This gas may remain around the battery for several hours after charging. Sparks or flames can ignite the gas and cause an explosion.

⚠ WARNING

WARNING: POISON! Batteries contain sulfuric acid which can cause severe burns. Avoid contact with skin, eyes or clothing. Wear goggles, rubber gloves and protective apron when working with a battery. In case of contact, flush with water at least 15 minutes. If swallowed, drink large quantities of water or milk. Follow with Milk of Magnesia, beaten egg or vegetable oil. Get medical attention immediately.

Battery

Marine batteries are completely sealed using an absorbent electrolyte principle to provide high reserve capacity, plus cold cranking performance.

If more than one (1) battery is being installed, all batteries are electrically isolated from one another. When the engine is running, each battery is charged automatically and independent of the other. This provides complete freedom of battery selection for power use plus alternator protection supplied by an isolator.

Dual Battery Switch and Optional Refrigerator

The dual battery switch enables DC power to be used from one or two batteries. Power to the engine and all 12 volt electrical equipment, except the **automatic bilge pump and optional refrigerator**, is controlled by the dual battery switch. The optional refrigerator has an ON/OFF switch. The dual battery switch settings available are OFF, 1, 2, and ALL.

IMPORTANT: The dual battery switch should be in the OFF setting when not in use and especially while the boat is unattended. While in the OFF setting, only the **automatic bilge pump and optional refrigerator** are supplied with DC power. All helm dash instrumentation is OFF.

The description and function for each of the settings is described here:

- **OFF** - All 12 volt power to boat is shut OFF, except for the **automatic bilge pump and optional refrigerator**. When boat is unattended for extended periods of time, turn the dual battery switch and the (optional) refrigerator ON/OFF switch to the OFF position.

⚠ CAUTION

CAUTION: Do not turn dual battery switch to OFF setting while engine is running; alternator and wiring damage could occur.

- **1** - Will use battery #1 to power engine and all 12 volt equipment. Battery #2 is isolated and remains in reserve. Battery #1 is charged by the alternator.
- **2** - Will use battery #2. Except for automatic bilge pump and optional refrigerator, battery #1 is isolated and remains in reserve. Battery #2 is charged by the alternator.

At least once a month, check the switch to make sure it is working properly. With the engine running and the boat safety tied to a pier, grasp the lanyard and pull the fork off. If the engine does not stop, see your dealer for replacement of the switch before getting underway.

WARNING: The ignition interrupter switch must never be removed or modified and must always be kept free from obstructions that could interfere with its operation.

WARNING

- **ALL** - Batteries are connected in parallel. Both batteries are used by the engine and all 12 volt equipment, and charged by the alternator when the engine is running.

Larson Boats recommends the use of only one (1) battery at a time. This is accomplished by using the number 1 or 2 setting. Avoid using the ALL setting. Only use the ALL setting when a single battery is not sufficient to start the engine.

NOTE: Rotating your battery usage will increase battery longevity.

Ignition Interrupter with Lanyard

NOTE: This component is supplied by the engine manufacturer. Complete operating instructions can be found in the engine operator's manual.

The ignition interrupter switch is a safety device which automatically stops the engine if the operator falls from the helm. A lanyard attached to the ignition interrupter must always be attached to a strong piece of clothing on the driver such as a belt loop. (An even better alternative would be to keep the lanyard attached to your life jacket as a reminder to you and your passengers to wear PFDs when the boat is underway.) If the driver leaves the helm station, and the lanyard is attached to the driver, the lanyard will pull a fork off the ignition interrupter and the engine will stop. To replace the fork, press the button on the ignition interrupter, and slide the fork into position over the button (see Figure 2.9).

NOTE: Rotating your battery usage will increase battery longevity.

Larson Boats recommends the use of only one (1) battery at a time. This is accomplished by using the number 1 or 2 setting. Avoid using the ALL setting. Only use the ALL setting when a single battery is not sufficient to start the engine.

- **ALL** - Batteries are connected in parallel. Both batteries are used by the engine and all 12 volt equipment, and charged by the alternator when the engine is running.

WARNING

WARNING: The ignition interrupter switch must never be removed or modified and must always be kept free from obstructions that could interfere with its operation.

At least once a month, check the switch to make sure it is working properly. With the engine running and the boat safety tied to a pier, grasp the lanyard and pull the fork off. If the engine does not stop, see your dealer for replacement of the switch before getting underway.

CAUTION

CAUTION: The lanyard stop switch should not be used as the normal engine shut off.

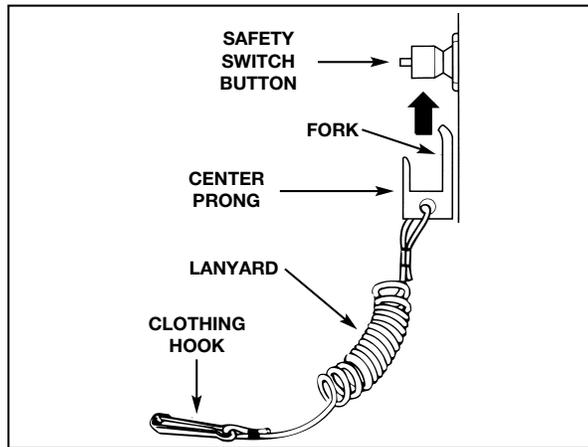


FIGURE 2.9 IGNITION INTERRUPTER WITH LANYARD

Carbon Monoxide (CO) Monitor (Optional)

NOTE: Please read information describing the dangers of carbon monoxide poisoning found on pages 1.10 to 1.12.

To activate the monitor, you must turn the battery switch ON to apply power. The CO monitor samples carbon monoxide concentration every 2-1/2 minutes. Once an alarm condition has been detected, the horn will be locked ON for the next 2-1/2 minutes at which time the next concentration will again be checked. At sample time, if the concentration is below the alarm threshold, the horn will be turned OFF. If the concentration is above the threshold, the

Carbon Monoxide (CO) Monitor (Optional)

NOTE: Please read information describing the dangers of carbon monoxide poisoning found on pages 1.10 to 1.12.

To activate the monitor, you must turn the battery switch ON to apply power. The CO monitor samples carbon monoxide concentration every 2-1/2 minutes. Once an alarm condition has been detected, the horn will be locked ON for the next 2-1/2 minutes at which time the next concentration will again be checked. At sample time, if the concentration is below the alarm threshold, the horn will be turned OFF. If the concentration is above the threshold, the horn will remain ON.

▲ WARNING

WARNING: The Federal Water Pollution Act prohibits the discharge of oil or oily waste into or upon the navigable waters and contiguous zone of the United States if such discharge causes a film or sheen upon, or discoloration of, the surface of the water, or causes a sludge or emulsion beneath the surface of the water. Violators are subject to a penalty of \$5000.

Bilge Pump

The bilge pump is used to remove water from the bilge. Most models are equipped with a manual bilge pump that operates only when you turn on the switch at the helm. The pump stops as soon as you turn the switch off. If you leave your boat in the water for extended periods of time, be sure to check the bilge regularly for water accumulation. Excessive amounts of bilge water can damage equipment located in the engine compartment.

Some models are equipped with an automatic bilge pump. Rising water in the bilge activates a float switch to start the pump. When most of the water has been pumped out, the float switch automatically shuts the pump off. Automatic bilge pumps can also be turned on manually using the switch at the helm.

IMPORTANT: Electrically operated bilge pumps can fail. There is no substitute for checking the bilge frequently, especially during periods of heavy rain, high seas, or storm conditions.

If for some reason the pump fails to start, check the fuse and wiring connections. If the pump motor runs but no water is discharged, it may be clogged. Keep the area around the switch and the pump free of debris. If there is no visible debris clogging the pump or blocking the float switch and water is still not being removed, inspect the discharge hose for kinks or obstruction.

If oil or fuel is spilled in the bilge, do not run the pump. Keep the oil or fuel from spreading in the bilge and properly dispose of it on shore. Your dealer can help you select products you can use to soak up the oil or fuel and give you advice about methods of disposal.

Bilge Blower

The bilge blower forces fumes out of the engine compartment area and circulates fresh air in through the deck vents. *The deck vents must be kept clear and open at all times.* The bilge blower must run at least four minutes before starting the engine. It must also be running during engine start-up and while operating your boat below cruising speed. It should not be operating during fueling operations. See page 3.6 for fueling instructions.

Some models are equipped with an automatic bilge pump. Rising water in the bilge activates a float switch to start the pump. When most of the water has been pumped out, the float switch automatically shuts the pump off. Automatic bilge pumps can also be turned on manually using the switch at the helm.

IMPORTANT: Electrically operated bilge pumps can fail. There is no substitute for checking the bilge frequently, especially during periods of heavy rain, high seas, or storm conditions.

Navigation Lights

WARNING: Never assume all explosive fumes have been removed from the engine compartment. If you detect any fuel odors, shut down the engine and electrical circuits, and immediately determine the source of the odor.



The drive unit on the lights is fully enclosed with a single control switch for vertical and horizontal movement. It is equipped with variable speed control for beam movement and an internal brake system for keeping the beam firmly on target. The three position rocker switch provides ON - OFF - ON for spot or flood selection.

Spotlight/Floodlight (Optional)



WARNING: Never assume all explosive fumes have been removed from the engine compartment. If you detect any fuel odors, shut down the engine and electrical circuits, and immediately determine the source of the odor.

Spotlight/Floodlight (Optional)

The drive unit on the lights is fully enclosed with a single control switch for vertical and horizontal movement. It is equipped with variable speed control for beam movement and an internal brake system for keeping the beam firmly on target. The three position rocker switch provides ON - OFF - ON for spot or flood selection.

Navigation Lights

Although activities are limited at night, night cruising can be pleasurable. Be especially careful of shallow waters and be on the watch for submerged debris, rocks, and other obstacles in the water. Your navigation lights are intended for collision avoidance only and are not intended to improve the operator's night vision.

Most boats have one white (stern), one red (port) and one green (starboard) light. The stern light is a removable pole light. To use the light, line up the two-prong plug in the pole with the receptacle in the base. Plug the light in, and lock into place with lever/slide lock. During the day, stow the light inside your boat to keep it out of the way.

Check lights for proper operation before heading out. You should also learn to identify the running light combinations for other vessels. We recommend your participation in a boating safety course to further learn about navigation lights and safe boating practices.

The navigation lights are controlled at the helm by a three-position rocker switch. This allows for selection of the stern (white) light ON when anchored or moored, or to have the mast (white), port (red) and starboard (green) lights all ON while underway and all lights are OFF in the OFF position.

Marine Stereo

WARNING: Alcohol flame is invisible in sunlight. Fueling ignited burner can cause alcohol to flare up. Do not light burner unless flame is extinguished and burner is cool. Carefully follow all instructions in owner's manual.



Depth Sounder (Optional)

The depth sounder can be used to determine how deep the water is underneath your boat. The depth sounder is connected to a transducer installed in the hull. After turning ON the unit, it automatically starts searching for the bottom. Once it's found, it will automatically adjust the sensitivity to keep the bottom depth displayed.

Specific operating instructions for the various depth sounder functions can be found in the manufacturer's literature supplied with your boat.

Many factors can affect the accuracy of the depth sounder. Do not rely on the depth sounder as your only navigational equipment.

Electric Windlass (Optional)

The windlass is used to raise or lower the anchor. The windlass control switches are mounted on the foredeck.

The manual supplied by the windlass manufacturer contains valuable safety information, operating and maintaining instructions, and anchoring tips. Read this material completely before using the windlass.

Alcohol Stove (Optional)

Your boat may be equipped with a single burner alcohol stove. The fuel reservoir holds approximately one quart (.95 liter) of ethyl alcohol. Refer to the owner's manual for details about using the stove safely.



WARNING: Use marine stove alcohol only. Always provide adequate ventilation when using an alcohol flame.

The depth sounder can be used to determine how deep the water is underneath your boat. The depth sounder is connected to a transducer installed in the hull. After turning ON the unit, it automatically starts searching for the bottom. Once it's found, it will automatically adjust the sensitivity to keep the bottom depth displayed. Specific operating instructions for the various depth sounder functions can be found in the manufacturer's literature supplied with your boat.

Depth Sounder (Optional)



WARNING: Alcohol flame is invisible in sunlight. Fueling ignited burner can cause alcohol to flare up. Do not light burner unless flame is extinguished and burner is cool. Carefully follow all instructions in owner's manual.

Marine Stereo

The unit is a highly sensitive electronic tuning AM/FM stereo receiver with cassette tape player.

The system employs several electronic circuits especially designed for superb radio reception on both AM and FM bands. Built into the unit are the SNC (Stereo Noise Cut) for noise reduction on FM broadcasts and the HCC (High Cut Circuit) which automatically cuts hissing noise.

Your boat is equipped with waterproof marine stereo speakers. The number of speakers and their location will change per Larson model. Some of the other features include AM/FM selector buttons, weather-band selector with channel selector, 7 band equalizer, head phone jack, CD (Compact Disc) input jack, automatic seek control, clock, battery back-up, memory, and mute control.

NOTE: The above listed features may vary on some marine stereo models. See the manufacturer's owner's manual for a complete list of features.

BOW PANEL

Some boats have an electrical panel in the bow. This panel has controls associated with the livewell aerator, the electric trolling motor, and the battery charger plug. Figure 2.3 is an electrical schematic of this panel.

Livewell Aerator

Boats with a bow panel have two extra deep-cycle batteries in the stern which power the livewell aerator, the trolling motor, and the fish locator. These batteries are independent from the boat's direct current (DC) electrical system which is powered by your boat's starting battery. (Glastron does not supply these batteries.)

IMPORTANT: When you charge the batteries, do not connect the charger clips directly to the battery posts. Have your Larson dealer install the adapter plug directly on the battery charger cables. Refer to the Trolling Motor section for more detailed information about battery charging.

Engine Tilt Control

The **TILT** switch has two positions: UP or DOWN. You can trim the main engine (outboard or inboard/outboard with stern drive) up from the bow of the boat by toggling the switch to the UP position. Operating your boat in shallow water will require trimming the engine up. When you are using the trolling motor, your boat will be easier to steer with the engine raised. You can lower the engine from the bow panel by toggling the switch to the down position.

TROLLING MOTOR

Some models have an electric trolling motor as standard equipment. This motor, which mounts on the bow of your boat, is powered by two deep-cycle marine batteries in the stern. The motor plugs into a receptacle on the bow panel.

The motor has an ON/OFF switch which activates the motor. A variable speed control allows you to adjust motor operating speed. The motor also has a forward/reverse switch to control the direction of travel.

Charging the motor's batteries slowly and frequently keeps them in top operating condition. A heavy, quick charge shortens battery life as does allowing batteries to sit after use without recharging them. The bow panel has a plug-in receptacle and a toggle switch for charging both batteries at the same time.

An AERATOR ON/OFF toggle switch controls the operation of the livewell aerator. Toggling the switch to ON starts the livewell water pump and aerates the livewell. Toggling the switch OFF stops the pump. A fuse for the aerator pump is near the aerator toggle switch.

Livewell Aerator

Larson Boats recommends that you have your dealer install the trolling motor and battery charger plugs. To avoid damage to your boat or its equipment, and to prevent personal injury, it is very important that only a qualified marine electrician install the plugs.

Trolling Motor Power Outlet

The **voltmeter** indicates the charge remaining in the battery or batteries selected at the BATTERY selector switch. If the switch is in the #1 position, it indicates the charge remaining in Battery 1. In the #2 position, it reads the combined charge available from both batteries.

To charge the batteries, plug a 12/24 volt battery charger into the charge plug on the panel. Larson recommends using a charger with a maximum rating not to exceed 40 amps.

Voltmeter

Downloaded from www.Manualslib.com manuals search engine

Batteries produce hydrogen and oxygen gases when the batteries are being charged. These explosive gases escape through the vent/fill caps and may form an explosive atmosphere around the battery if ventilation is poor. This gas may remain around the battery for several hours after charging. Sparks or flames can ignite the gas and cause an explosion.

WARNING: During charging, batteries produce gases which can explode, if ignited. Explosion can shatter a battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.

WARNING

LIVEWELL

WARNING: POISON! Batteries contain sulfuric acid which can cause severe burns. Avoid contact with skin, eyes or clothing. In case of contact, flush with water at least 15 minutes. If swallowed, drink large quantities of water or milk. Follow with Milk of Magnesia, beaten egg or vegetable oil. Get medical attention immediately.

WARNING

WARNING

WARNING: During charging, batteries produce gases which can explode, if ignited. Explosion can shatter a battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.

Batteries produce hydrogen and oxygen gases when the batteries are being charged. These explosive gases escape through the vent/fill caps and may form an explosive atmosphere around the battery if ventilation is poor. This gas may remain around the battery for several hours after charging. Sparks or flames can ignite the gas and cause an explosion.

WARNING

WARNING: POISON! Batteries contain sulfuric acid which can cause severe burns. Avoid contact with skin, eyes or clothing. In case of contact, flush with water at least 15 minutes. If swallowed, drink large quantities of water or milk. Follow with Milk of Magnesia, beaten egg or vegetable oil. Get medical attention immediately.

LIVEWELL

An aerated livewell is included as standard equipment on some models. The primary function of the livewell is to provide the means for keeping your catch alive until your day of fishing ends. Figure 2.10 shows the livewell system on your Larson boat.

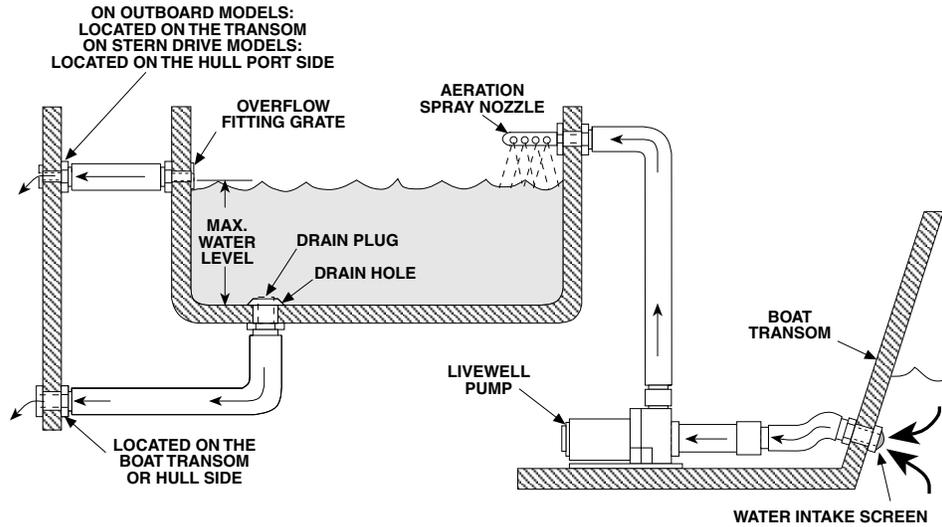


FIGURE 2.10 MANUAL LIVEWELL

2. Make sure the pump is not clogged. If the pump or thru-hull fitting is clogged, you may be able to clear the obstruction by forcing water back through the pump. Using a garden hose, direct water flow into the pump inlet until water flows freely from the thru-hull inlet.

1. Check the livewell fuse on the bow panel. Replace the fuse if necessary.

Do not operate the livewell pump if it is not pumping water. Operating the pump dry can overheat its water-cooled motor and damage the unit. If water does not come out of the aerator nozzle:

The livewell system has a pump that draws water in through a screen on the hull fitting and pumps the water through an aeration spray nozzle into the livewell. The oxygen content of the water increases as the small jets of water streaming from the spray nozzle splash onto the surface of the water in the livewell. The additional oxygen helps keep fish in the livewell alive.

Water above the level of an overflow on the side of the livewell flows through a hose and out through a fitting on the side of the boat. Removing a drain plug in the bottom of the livewell drains water from the livewell through a fitting in the boat hull below the level of the bottom of the livewell.

The livewell system has a pump that draws water in through a screen on the hull fitting and pumps the water through an aeration spray nozzle into the livewell. The oxygen content of the water increases as the small jets of water streaming from the spray nozzle splash onto the surface of the water in the livewell. The additional oxygen helps keep fish in the livewell alive.

Water above the level of an overflow on the side of the livewell flows through a hose and out through a fitting on the side of the boat. Removing a drain plug in the bottom of the livewell drains water from the livewell through a fitting in the boat hull below the level of the bottom of the livewell.

To fill the livewell:

1. Be sure the plug is in place in the bottom livewell drain.
2. Toggle the AERATOR switch at the bow panel to ON. The livewell pump will start, and the livewell will fill with water up to the level of the overflow.
3. Toggle the switch OFF when the livewell is filled. Operate the livewell aerator as needed to freshen and maintain the oxygen supply by aerating the water in the livewell.

To ensure that your livewell remains clean and the water in it remains fresh, empty the livewell after you have finished using it. To drain the livewell, remove the drain plug in the bottom. Because water will drain only to the water level outside your boat, drain the livewell after you remove your boat from the water. If you are leaving your boat in the water, insert the drain plug and bail the remaining water from the livewell.

IMPORTANT: If water in the livewell system freezes, hoses can break as the frozen water expands. Be sure to empty the livewell completely during freezing weather.

Do not operate the livewell pump if it is not pumping water. Operating the pump dry can overheat its water-cooled motor and damage the unit. If water does not come out of the aerator nozzle:

1. Check the livewell fuse on the bow panel. Replace the fuse if necessary.
2. Make sure the pump is not clogged. If the pump or thru-hull fitting is clogged, you may be able to clear the obstruction by forcing water back through the pump. Using a garden hose, direct water flow into the pump outlet until water flows freely from the thru-hull inlet.
3. Make sure current is reaching the pump. Check and tighten connections. Make sure wires are not broken.
4. Remove access plate located in motor splash well and check pump, hoses and clamps for leakage. Tighten any clamps that are loose.

If you still have problems with the pump, contact your Larson dealer.

ADDITIONAL SAFETY INFORMATION **(SKI'n FISH MODELS)**

1. Before using the ski tow bar make sure that it is securely fastened to the boat.
2. To prevent outboard motor damage when using the ski tow bar, make sure that the ski rope does not come in contact with the outboard motor.
3. When using the ski tow bar, all passengers must stay clear of the ski rope.
4. Only use the fishing seats (mounted in the bow or cockpit) if the boat is at a no wake speed or stopped.

Tongue weight is measured as a percentage of the total weight of the loaded trailer on its tongue. Ideal tongue weight is not less than five percent (5%) and not more than ten percent (10%) of the GVWR. For example, if the weight of the loaded trailer is 3000 pounds, the weight on the tongue should be more than 150 pounds but less than 300 pounds. Excessive tongue weight will cause the front end of the towing vehicle to sway. Insufficient tongue weight will cause the trailer to sway or fishtail.

Selection of a trailer for your Larson boat is extremely important. Your trailer should be able to accommodate the boat, engine, and any other equipment that will normally be carried. Take the time to have your boat weighed while it is empty, and again when completely loaded including a full fuel tank. You will save a great deal of trouble by staying within the maximum load limits of the trailer.

TRAILERING

Boat ownership carries with it certain responsibilities to yourself as well as your passengers and the general public. Safety, common sense operation, careful maintenance, and compliance with the law will not hamper your boating pleasure, but will make boating more enjoyable.

LARSON Better Built Boats. **PRE-LAUNCH & UNDERWAY 3**

Boat ownership carries with it certain responsibilities to yourself as well as your passengers and the general public. Safety, common sense operation, careful maintenance, and compliance with the law will not hamper your boating pleasure, but will make boating more enjoyable.

TRAILERING

Selection of a trailer for your Larson boat is extremely important. Your trailer should be able to accommodate the weight of the boat, engine, and any other equipment that will normally be carried. Take the time to have your boat weighed while it is empty, and again when completely loaded including a full fuel tank. You will save a great deal of trouble by staying within the maximum load limits of the trailer.

Check the certification label on the frame of the trailer for the Gross Vehicle Weight Rating (GVWR). The total weight of your boat, engine, fuel, gear, and trailer should not exceed the GVWR. Your Larson dealer can help you select an appropriate trailer for your boat.

For older trailers, proper adjustment of the side support pads is critical each time your boat is loaded. Newer trailers feature side supports that are self-adjusting. Periodically inspect your trailer to make sure the side supports are in adequate working condition.

IMPORTANT: The side supports should only be tight enough to keep the boat from leaning side to side. Any unnecessary pressure will damage the hull.

If your towing vehicle is equipped with a weight-distribution hitch, it must be capable of handling the GVWR. The weight on the trailer should be evenly distributed and can be checked by determining the tongue weight.

Tongue weight is measured as a percentage of the total weight of the loaded trailer on its tongue. Ideal tongue weight is not less than five percent (5%) and not more than ten percent (10%) of the GVWR. For example, if the weight of the loaded trailer is 3000 pounds, the weight on the tongue should be more than 150 pounds but less than 300 pounds. Excessive tongue weight will cause the front end of the towing vehicle to sway. Insufficient tongue weight will cause the trailer to sway or fishtail.

WARNING

WARNING: Improper trailer size and improper weight distribution can cause swaying and fishtailing that can result in extensive damage to the trailer, the boat, and the towing vehicle. Swaying and fishtailing are especially dangerous at higher speeds where they can become uncontrollable. Damage caused as a result of improper trailering is not covered under the Larson Boats Warranty.

All trailers with a GVWR of 1500 pounds or greater are required to have brakes. Requirements may vary, so check with your Larson dealer for additional information.

Trailering Guidelines

1. Be sure that the rollers or bunks displace a large amount of hull surface, and be sure the boat and equipment distribute evenly on the trailer.
2. Make sure your boat is properly tied down and a safety chain is used.
3. Check local and state laws concerning any trailer requirements.

4. Do not trailer with your boat's convertible top up. It will be severely damaged. Use a mooring cover for extended trips.
 5. You are required by state and federal laws to equip boat trailers with functional taillights and turn signals.
 6. Some states require registration of boat trailers and license plates. Check with the Department of Motor Vehicles for regulations governing your particular state.
1. Inspect the hull and propeller for damage, excessive dirt or marine growth which will affect your boat's performance and fuel efficiency.
 2. Check the electrical system and navigation lights.
 3.
 - If your boat has been in the water, operate the bilge pump until the flow of water stops.
 - If your boat has been out of the water, check that all bilge water has drained out. Then install the drain plug.

4. Do not trailer with your boat's convertible top up. It will be severely damaged. Use a mooring cover for extended trips.
5. You are required by state and federal laws to equip boat trailers with functional taillights and turn signals.
6. Some states require registration of boat trailers and license plates. Check with the Department of Motor Vehicles for regulations governing your particular state.

LAUNCHING

Pre-launch Inspection

Power and loading — All boats under 26-foot in length are required to have a capacity rating plate showing the recommended persons capacity as well as the actual weight capacity of the boat including persons, engine and gear. Also, on outboard models, the plate will show the maximum horsepower which can be safely installed.

CAUTION

CAUTION: Do not exceed these capacity ratings. An overpowered boat can become unstable, sometimes resulting in loss of control or capsizing. An overloaded boat can become sluggish and hard to handle. Overloading or overpowering can also reduce freeboard and increase the danger of swamping, particularly in rough water. In addition, overloading or overpowering is illegal under most state laws and the Larson Warranty is void if the owner exceeds the recommended capacity ratings.

INSPECTION CHECKLIST

Before beginning your boating excursion, get a current weather report. If the weather will not be favorable, postpone your trip.

1. Inspect the hull and propeller for damage, excessive dirt or marine growth which will affect your boat's performance and fuel efficiency.
2. Check the electrical system and navigation lights.
3.
 - If your boat has been in the water, operate the bilge pump until the flow of water stops.
 - If your boat has been out of the water, check that all bilge water has drained out. Then install the drain plug.
4. Check that all required safety equipment is on board and in good working condition. Examples include personal flotation devices (PFDs), horn, fire extinguisher, visual distress signals, etc. Take along a gallon of water.
5. Check that all other required equipment is on board. Examples include mooring lines, anchor lines, tool kit, etc.
6. Visually inspect engine for oil, fuel or water leaks; cracked hoses; defective belts; or other signs of engine problems. Check engine oil and battery water levels.

WARNING

WARNING: POISON! Batteries contain sulfuric acid which can cause severe burns. Avoid contact with skin, eyes or clothing. Wear goggles, rubber gloves and protective apron when working with a battery. In case of contact, flush with water at least 15 minutes. If swallowed, drink large quantities of water or milk. Follow with Milk of Magnesia, beaten egg or vegetable oil. Get medical attention immediately.

8. Check fuel level.

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.



7. Check that all engine drains and petcocks are closed.

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.



1. Have an individual at the launch ramp give you directions. Back slowly down the ramp. If the trailer needs to be maneuvered to the right, turn the towing vehicle's steering wheel to the left. If trailer movement to the left is required, turn the steering wheel to the right.

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.



NOTE: For more specific information, refer to your trailer owner's manual.

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.



Here are some tips to remember when putting your boat in the water.

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.



1. Have an individual at the launch ramp give you directions. Back slowly down the ramp. If the trailer needs to be maneuvered to the right, turn the towing vehicle's steering wheel to the left. If trailer movement to the left is required, turn the steering wheel to the right. Always remember to launch your boat at a right angle to the shoreline.

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.



NOTE: If you do not have experience in backing up with a trailer, Practice. Take your trailer to an open area and master using it before you get into a confined public or private launch site.

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.



2. When the boat's transom is in several inches of water:

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.



• STOP the towing vehicle.

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.



• Leave manual transmission in gear or place automatic transmission in park.

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.



• Turn off the engine.

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.



• Set the hand brake.

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.



NOTE: If you have a bunk trailer, the boat's transom must be deeper than several inches in the water before launching.

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.



3. Place blocks behind the vehicle's back wheels.

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.



4. Do not unclasp the winch cable from the bow eye until a mooring line has been secured. See the Mooring Lines information that follows for suggested securing procedures.

WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.



Launching Guidelines



WARNING: During charging, batteries produce gases which can explode if ignited. Explosion can shatter battery. Acid can cause severe personal injury such as blindness. Keep flame, spark and smoking materials away from battery while charging. Charge battery in a well-ventilated area.

- 7. Check that all engine drains and petcocks are closed.
- 8. Check fuel level.



DANGER: Fuel leaking from any part of the fuel system can lead to fire and explosion that can cause serious bodily injury or death. Inspect system before starting the engines. Do not smoke and keep open flames away when checking fuel system.

- 9. If launching from a trailer, tilt the stern drive up to the high tilt position to avoid damage during the launch.
- 10. Before backing your boat down the launch ramp:
 - Remove all tie-downs.
 - Properly secure all loose gear.
 - Inventory your safety equipment.
 - Load all personal gear.
 - Lock winch and trailer unit.
 - Disconnect trailer wiring from towing vehicle to prevent short circuits caused by submersion.

Launching Guidelines

NOTE: For more specific information, refer to your trailer owner's manual.

Here are some tips to remember when putting your boat in the water.

- 1. Have an individual at the launch ramp give you directions. Back slowly down the ramp. If the trailer needs to be maneuvered to the right, turn the towing vehicle's steering wheel to the left. If trailer movement to the left is required, turn the steering wheel to the right. Always remember to launch your boat at a right angle to the shoreline.

NOTE: If you do not have experience in backing up with a trailer, Practice. Take your trailer to an open area and master using it before you get into a confined public or private launch site.

- 2. When the boat's transom is in several inches of water:
 - STOP the towing vehicle.
 - Leave manual transmission in gear or place automatic transmission in park.
 - Turn off the engine.
 - Set the hand brake.

NOTE: If you have a bunk trailer, the boat's transom must be deeper than several inches in the water before launching.

- 3. Place blocks behind the vehicle's back wheels.
- 4. Do not unclasp the winch cable from the bow eye until a mooring line has been secured. See the **Mooring Lines** information that follows for suggested securing procedures.

8. Pull your towing vehicle away from the launch ramp.
7. Make sure the boat is still secured to the mooring element.
6. Launch the boat; move it down and OFF the trailer into the water.
5. To keep the boat from drifting, the other end of the mooring line must be secured by an individual or a mooring element (i.e., dock cleat, pier pillar, etc.) on shore.

If you are mooring your boat for a short time, bow and stern lines may be the only lines you will need. If you are mooring your boat for a longer time or if the currents are swift, you should use spring lines. The stern spring line leads from the boat's stern cleat forward to the piling or cleat on the dock. The bow spring line leads from the bow cleat aft to the dock. (See Figure 3.1.)

5. To keep the boat from drifting, the other end of the mooring line must be secured by an individual or a mooring element (i.e., dock cleat, pier pillar, etc.) on shore.
6. Launch the boat; move it down and OFF the trailer into the water.
7. Make sure the boat is still secured to the mooring element.
8. Pull your towing vehicle away from the launch ramp.
9. Park only in designated areas. When parking, be sure your towing vehicle and trailer do not block other boaters from approaching the launch ramp or hinder their ability to maneuver a boat and trailer when launching.

If you are mooring your boat for a short time, bow and stern lines may be the only lines you will need. If you are mooring your boat for a longer time or if the currents are swift, you should use spring lines. The stern spring line leads from the boat's stern cleat forward to the piling or cleat on the dock. The bow spring line leads from the bow cleat aft to the dock. (See Figure 3.1.)

If you are mooring your boat in a slip, bow and spring lines, port and starboard, will keep your boat in position.

Mooring Lines

The mooring lines you will use most often are the bow line, the stern line and spring lines as shown in Figure 3.1. Each line has a specific purpose. The bow line and the stern line secure your boat's bow and stern. The two spring lines keep your boat from moving forward or backward when you are moored alongside a dock.

Mooring lines must be long enough to secure your boat in any docking situation. For example, the length of the lines for a 16-foot runabout should be at least 15 feet. An eye splice at the end of each line (shown on Figure 3.1) should be large enough to fit comfortably over bow or stern cleats.

NOTE: If you are mooring your boat in an area where tides are a consideration, be sure to leave slack in the lines to make up for the rise and fall of the water.

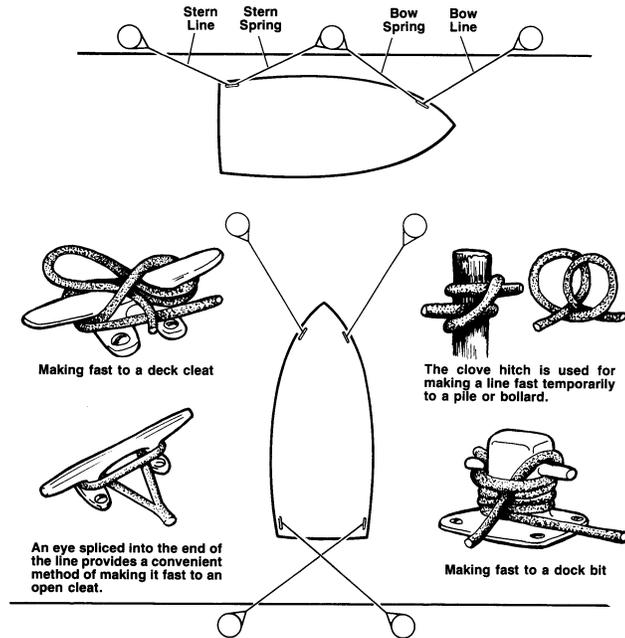


FIGURE 3.1 - MOORING LINES

IMPORTANT: Falls from moving boats are a major cause of fatal recreational boating accidents. Passengers should board the boat one-at-a-time and be seated. Passengers should remain seated during loading of the boat to maintain an even trim. Prohibit passengers from riding on the bow with feet hanging over the side, or from riding on the stern or gunwales. Falls from moving boats are a major cause of fatal recreational boating accidents. The Coast Guard considers these acts to be negligent or

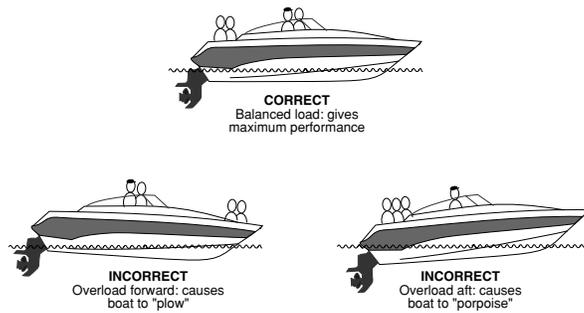
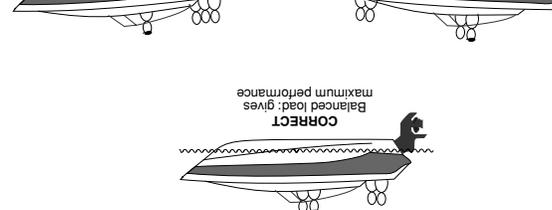


FIGURE 3.2 – LOADING PASSENGERS

LOADING

NOTE: Boats over 26 feet in length are not subject to U.S. Coast Guard safe loading or labeling requirements.

When loading your Larson boat, remember to distribute the load evenly. Keep the load low and do not overload. The capacity plate affixed to your Larson boat states the maximum load capacity. The plate shows persons and gear in pounds that the boat will safely handle under normal conditions. The U.S. Coast Guard establishes these load capacity ratings.

When loading always step onto the boat, never board by jumping. Have someone on the dock pass your gear aboard. Secure all gear firmly so it will not move or interfere with operation of the boat.

Passengers should board the boat one-at-a-time and be seated. Passengers should remain seated during loading of the boat to maintain an even trim. Prohibit passengers from riding on the bow with feet hanging over the side, or ride while sitting on the stern or gunwales. Falls from moving boats are a major cause of fatal recreational boating accidents.

IMPORTANT: Falls from moving boats are a major cause of fatal recreational boating accidents. Do not allow passengers to ride on the bow with feet hanging over the side or ride while sitting on the stern, gunwales, or seat backs. The Coast Guard considers these acts to be negligent or grossly negligent operation and prohibits them by law.

IMPORTANT: The presence of the capacity plate does not relieve the boat operator from the responsibility of using common sense or sound judgement. Turbulent waters and adverse weather conditions will reduce the maximum load capacity rating of the boat.

IMPORTANT: Passengers should be seated in the bow area so they do not obstruct the driver's vision.

1. The weight of the anchor and diameter of anchor line should be governed by the size and weight of your boat. Obtain advice from your Larson dealer before purchasing an anchor.
2. Keep anchor secure while underway to prevent damage or injury due to sudden shifting in the boat's attitude.
3. Make sure the anchor line is secured to the bow eye or deck cleat. Never tie to a rail, rail fitting, or other hardware which is not meant to support this stress.

1. It is recommended to have the engine running when you pull in anchor.
2. Slowly maneuver the boat forward to reduce tension on the line and make retrieval of the anchor line easier.

Weigh (pull in) Anchor

Watch for anchor drag by checking shoreline landmarks at the time the anchor is dropped and one-half hour later. If the boat has drifted away from these reference marks, the anchor is dragging and must be reset.

Watch for anchor drag by checking shoreline landmarks at the time the anchor is dropped and one-half hour later. If the boat has drifted away from these reference marks, the anchor is dragging and must be reset.

Weigh (pull in) Anchor

1. It is recommended to have the engine running when you pull in anchor.
2. Slowly maneuver the boat forward to reduce tension on the line and make retrieval of the anchor line easier.
3. Pull in the length of anchor line until the line is vertical. Pull firmly to lift the anchor's shank and free the flukes from the bottom.

If the anchor becomes stuck, attach the vertical line to the mooring cleat. Wave action on the bow may lift flukes from the bottom and free the anchor. If the anchor is still stuck, feed out a few feet of line and attach it to the bow cleat. Maneuver the boat around the anchor, keeping the line firm. Locate an angle that will pull the anchor free.

FUELING RECOMMENDATIONS

⚠ WARNING

WARNING: Do not use fuels that incorporate any form of alcohol or alcohol derivatives. Alcohol destroys marine fuel system hoses and components, that could result in hazardous leaks, fire, and explosion.

While alcohol boosts the octane level of gasoline, it also attacks the rubber fuel distribution lines and even metal fuel system components. Alcohol will permeate most fuel hoses and other components such as fuel pump, gaskets, and seals. Alcohol also contributes to fuel system contami-

ANCHORING

1. The weight of the anchor and diameter of anchor line should be governed by the size and weight of your boat. Obtain advice from your Larson dealer before purchasing an anchor.
2. Keep anchor secure while underway to prevent damage or injury due to sudden shifting in the boat's attitude.
3. Make sure the anchor line is secured to the bow eye or deck cleat. Never tie to a rail, rail fitting, or other hardware which is not meant to support this stress.
4. Use two or more anchors if anchoring overnight or for extended periods. If not using two anchors, make certain there is sufficient clearance for your boat to swing in a full circle to prevent damage in case of shifting winds.
5. Make certain you have enough anchor line (or scope) for the depth of water. Your anchor line should be 6 to 7 times the depth of water anchored in. For example, you are in 20 feet of water, so use 120 to 140 feet of anchor line.

Dropping Anchor

1. Have a crew member carefully lower the anchor. Keep slight tension on the anchor while lowering and maintain your tension after anchor reaches bottom.
2. Maneuver the boat backwards slowly until the proper length of anchor line is handed out.
3. Fasten the anchor line around the bow eye or deck cleat. Anchor flukes should dig in and catch.

- Fueling**
- Remove portable fuel tanks from the boat when filling. Wipe any spilled fuel from portable tanks before placing them in boat.
 - Do not store fuel in areas that are not adequately ventilated.
 - Use only fuel lubricants recommended by the engine manufacturer.

nation. Phase separation is common in alcohol blend fuels since alcohol absorbs water and separates from the fuel causing a gasoline rich top layer, and an alcohol/water layer on the bottom.

⚠ WARNING

WARNING: Use only marine fuel hose marked "USCG Type A" if replacement is necessary. Inspect all fuel distribution lines often to reduce the risk of fire hazard.

If only fuel containing alcohol is available, or the presence of alcohol is unknown, you must perform more frequent inspections for leaks and abnormalities. Any sign of leakage or deterioration requires replacement before further engine operation.

Preliminary Guidelines

- Safely secure your boat to the dock.
- Do not smoke, extinguish all open flames, STOP all engines and other devices that could cause sparks, **including the bilge blower**. Do not use electrical switches or accessories, shut OFF all stoves that may produce a spark or flame.
- Close all hatches, windows, doors, and compartments to prevent the accumulation of fuel vapors.

⚠ WARNING

WARNING: Vapor from spilled fuel is heavier than air and will flow to the lowest part of the boat. Ventilate before starting.

- Ensure a fire extinguisher is readily available.

WARNING: Use only marine fuel hose marked "USCG Type A" if replacement is necessary. Inspect all fuel distribution lines often to reduce the risk of fire hazard.

⚠ WARNING

Phase separation is common in alcohol blend fuels since alcohol absorbs water and separates from the fuel causing a gasoline rich top layer, and an alcohol/water layer on the bottom.

- Remove portable fuel tanks from the boat when filling. Wipe any spilled fuel from portable tanks before placing them in boat.
- Do not store fuel in areas that are not adequately ventilated.
- Use only fuel lubricants recommended by the engine manufacturer.

Fueling

⚠ DANGER

DANGER: Gasoline vapors are highly explosive. Follow all safety precautions before, during, and after fueling.

NOTE: See your dealer or the sales literature to determine your boat's fuel tank capacity.

- Always fuel in an area supplying sufficient lighting conditions. Gasoline spills are unnoticeable under poor lighting or in darkness.
- Remove the fuel fill plate.
- Insert the fuel supply nozzle, keeping the nozzle in contact with the fuel fill plate while fueling, to guard against static produced sparks.

IMPORTANT: When fueling or having your boat fueled by an attendant, be sure the waste and water fill plates are not mistaken for the fuel fill plate.

- Stand away from the fuel tank vent and fill plate during fueling. Splash-back may occur and can be an eye irritant as well as a fire hazard.
- Avoid spillage.* Wipe any excess fuel immediately.

1 Replace the fuel fill plate and wipe up any fuel spillage.
 2. If fuel cannot be pumped in at a reasonable rate, check for fuel vent blockage or kink in the line.
 3. Allow space at the top of the tank for thermal expansion.
 4. After pumping approximately 10 gallons of fuel into the fuel tank, inspect the engine and fuel tank area for any signs of fuel leakage. Continue fueling if no leaks or other problems are detected.
 5. If fuel cannot be pumped in at a reasonable rate, check for fuel vent blockage or kink in the line.
 6. Allow space at the top of the tank for thermal expansion.
 7. After pumping approximately 10 gallons of fuel into the fuel tank, inspect the engine and fuel tank area for any signs of fuel leakage. Continue fueling if no leaks or other problems are detected.
 8. If fuel cannot be pumped in at a reasonable rate, check for fuel vent blockage or kink in the line.
 9. Replace the fuel fill plate and wipe up any fuel spillage.

After Fueling

6. After pumping approximately 10 gallons of fuel into the fuel tank, inspect the engine and fuel tank area for any signs of fuel leakage. Continue fueling if no leaks or other problems are detected.
7. Allow space at the top of the tank for thermal expansion.
8. If fuel cannot be pumped in at a reasonable rate, check for fuel vent blockage or kink in the line.

After Fueling

1. Replace the fuel fill plate and wipe up any fuel spillage. Discard any rags that you may have used to wipe up fuel spillage in a safe place.
2. Open the engine compartment and all hatches, windows, doors and other compartments that were closed during fueling. Inspect these areas for the odor of fuel vapors and visible fuel leakage. Any sign of fuel leakage or any indication of vapors must be investigated and corrected before starting the engine.
3. Run the bilge blower for at least five (5) minutes before starting the engine. Continue to run the bilge blower until the boat is underway and has reached its cruising speed.

GETTING UNDERWAY

Instrumentation

A full set of instruments, installed on your Larson boat, show what is taking place within your engine. Consult with your Larson dealer about the normal readings of the gauges upon delivery of your boat. This will provide you with a reference point for the life of the engine. Keep in mind some gauges tend to fluctuate which is not uncommon. But when operating your boat, investigate all gauges that show a greater or less than normal reading.

Fuel Gauge

NOTE: Some brands of engines are equipped with multi-function gauges and alarms. See engine owner's manual for additional information.

NOTE: Some brands of engines are equipped with multi-function gauges and alarms. See engine owner's manual for additional information.

Fuel Gauge

Displays the amount of fuel contained within the fuel tank(s). The most accurate reading of the fuel gauge is at idle speed when your boat maintains an approximately level position. Underway, the fuel gauge will usually indicate a higher fuel level than is actually in the tank due to the bow of the boat being higher than at rest. Since gauge readings are approximate, they should be compared to the hours of use versus known fuel consumption, or gallons per hour (GPH). The most common practice of good fuel management is the one-third rule. You use one-third of your total fuel on board to travel to your destination and one-third in returning. The remaining one-third in the fuel tank should be reserved for emergencies.

Oil Pressure Gauge

The oil pressure gauge will reflect most, if not all, serious problems that may occur within your engine. A pre-set valve in the oil pump controls the maximum oil pressure. If a complete loss of oil pressure occurs, **stop the engine immediately**. Serious damage to the engine can result after loss of oil pressure if the engine continues to run. Check the engine oil level and fill if low. If oil level is full and gauge reading is low, contact your Larson dealer or a qualified mechanic to rectify the problem. **Do not restart the engine until correcting the problem**. See engine manufacturer's specifications for correct pressure ranges.

Tachometer

Displays the number of revolutions per minute (RPM) that the engine is running. The gauge displays increments of 100. The tachometer will show the RPMs necessary under

It is important that you get the "feel" of your boat's steering system. Steering does vary from boat to boat depending on

Steering Control

CONTROLS

attitude and engine RPM. Proper trim should be indicated by bow unit in degrees. This should be read carefully as it does not show position of the drive unit. This should indicate the relative position of the drive unit.

Power Trim Gauge – (Optional Some Models)

various engine operating conditions. Consult with your Larson dealer if you require additional information. Do not exceed engine manufacturer's recommendations.

Speedometer

Indicates boat speed in MPH (miles per hour). The accuracy of this instrument depends on the placement and cleanliness of the pickup tube. The pickup tube should be tilted up for trailering or shallow water, and down while underway.

Temperature Gauge

Displays the temperature of the engine water cooling system. This gauge should always be checked right after starting the engine. Marine engines draw external water, circulate it through the heat exchanger on the engine, and expel it overboard through the exhaust system. If the temperature gauge shows a hot condition, **stop the engine immediately**. Refer to your engine owner's manual for instructions and corrective action.

Voltmeter

Displays battery voltage. Under normal engine running conditions (1000 RPMs or higher), the voltage will range between 11 and 14 volts when the alternator is charging. With the engine OFF and ignition key or switch ON a fully charged battery is indicated by a high voltmeter reading. Significantly higher or lower readings show a battery problem, alternator malfunction, or heavy drain on the battery. You should check the charging system and battery system for these higher or lower readings. An oscillating reading shows a loose voltage regulator connection or loose belts. Displayed low voltage readings after stopping engine shows a bad battery or heavy load on the battery. Refer to your engine owner's manual for proper gauge readings.

Indicates boat speed in MPH (miles per hour). The accuracy of this instrument depends on the placement and cleanliness of the pickup tube. The pickup tube should be tilted up for trailering or shallow water, and down while underway.

Speedometer

various engine operating conditions. Consult with your Larson dealer if you require additional information. Do not exceed engine manufacturer's recommendations.

Power Trim Gauge – (Optional Some Models)

Indicates the relative position of the drive unit. This should be read carefully as it does not show position of the drive unit in degrees. Proper trim should be indicated by bow attitude and engine RPM.

CONTROLS

Steering Control

It is important that you get the "feel" of your boat's steering system. Steering does vary from boat to boat depending on hull shape, engine type, water and wind condition, and load.

Turn wheel from full left to full right and make certain the engine or drive unit is turning correctly. The system should run freely and smoothly.

Most I/O models are equipped with power steering. Check the fluid level and belt tension before starting. The cable output end of the steering system should be kept clear of fuel lines, control cables, electrical wiring, and other on board gear when the engine is moved through its full operating range.

CAUTION

CAUTION: Do not over-tighten bolts or nuts that have been previously tightened. Use only manufacturer's specifications and parts when repairing or replacing steering parts.

To maintain a straight course, keep at least one hand in control of the steering wheel at all times while underway.

Throttle/Shift Control - I/O

NOTE: For optional or Larson dealer installed controls, see the information supplied by the manufacturer of the control.

CAUTION: When shifting between forward and reverse, always pause in neutral for a few seconds before reversing the rotation of the propeller(s). This will prevent unnecessary damage to the drive system.



On twin engine boats, dual throttle consoles provide independent control of both clutch and throttle operation of each engine. This design allows one handed control over both of the engines.

IMPORTANT: Allow the engine to warm up before engaging the shift control. Monitor all instruments while engine is idling during warm up. See the engine manufacturer's specifications for proper operating ranges.

Place the throttle/shift control handle in the NEUTRAL position. The engine should not start unless the control is in NEUTRAL, or the NEUTRAL safety switch is activated by pulling the entire handle or knob out toward the center-line of the boat.



CAUTION: The throttle on a hand operated remote control does not return to idle as on an automobile, when the pressure is released. Make sure you can reach the control lever quickly at all times when the engine is running.

The throttle/shift control regulates the RPM of the engine. Forward movement of the throttle increases the RPM of the engine. It also increases boat speed through the water when the engine is in either forward or reverse gear. The throttle control also acts as the gear shift lever to control the forward and aft movement of the boat.

Moving the throttle forward from the neutral position engages the shifting mechanism causing the boat to move forward. Continuing the forward movement of the throttle will increase engine RPM, and cause the boat to move faster in a forward direction.

Moving the throttle aft from the neutral position reverses the shift mechanism causing the boat to move backward. Continuing the aft movement of the throttle will increase engine RPM and cause the boat to move faster in a backward direction.

When maneuvering at low speeds you can reverse (move throttle backwards or aft) the shift mechanism. This will result in a braking action.

On twin engine boats, dual throttle consoles provide independent control of both clutch and throttle operation of each engine. This design allows one handed control over both of the engines.



CAUTION: When shifting between forward and reverse, always pause in neutral for a few seconds before reversing the rotation of the propeller(s). This will prevent unnecessary damage to the drive system.



WARNING: High speed acceleration in reverse can create a wake that could wash over the transom and flood the boat.

Dual Lever Controls

Some models are equipped with dual lever controls. A separate throttle lever, with a red handle, is located closest to the driver on his right hand side. A black handled gear shift lever is located to the right of the right of the throttle lever.

The neutral detent position on the gear shift lever is located in the middle of the lever's travel. Pushing the lever ahead shifts the stern drive into forward, and pulling the lever back all the way shifts the stern drive into reverse.



CAUTION: Before moving the gear shift lever, make sure the throttle is in the idle position. Failure to do so could cause loss of boat control, injury to occupants, and engine and drive system damage.



IMPORTANT: Allow the engine to warm up before engaging the shift control. Monitor all instruments while engine is idling during warm up. See the engine manufacturer's specifications for proper operating ranges.

Place the throttle/shift control handle in the NEUTRAL position. The engine should not start unless the control is in NEUTRAL, or the NEUTRAL safety switch is activated by pulling the entire handle or knob out toward the center-line of the boat.

Practice stopping maneuvers and learn early how your boat reacts. From forward motion, pull back the throttle towards NEUTRAL. Depending on your speed, the distance the boat travels until it comes to a complete stop will vary.

Stopping-You do not have brakes on a boat.

CAUTION: Never pull the knob or handle out while the engine is in gear. This can cause jamming of the control, possible improper control, or gear selection.

CAUTION

The throttle lever is in the idle position when it is pulled all the way back. Advancing the throttle forward increases the engine RPM.

WARNING

WARNING: High speed acceleration in reverse could create a wake that can wash over the transom and flood the boat. Only maneuver in reverse at low speeds.

Throttle/Shift Controls - Outboards

NOTE: For optional or Larson dealer installed controls, see the information supplied by the manufacturer of the control.

The controls on your boat are of the single lever throttle/shift type.

CAUTION

CAUTION: The throttle on a hand operated remote control does not return to idle as on an automobile, when the pressure is released. Make sure you can reach the control lever quickly at all times when the engine is running.

The NEUTRAL safety switch is activated by placing the control lever in the NEUTRAL position and pulling the entire hub of the handle toward the center of the boat. This allows the throttle to be operational for warm up or "clearing out" the engine while the shift remains in NEUTRAL.

NOTE: This may vary between the different types of controls used by the outboard manufacturers. Please read the instructions provided with your engine and control system.

Throttle/Shift Controls - Outboards

WARNING: High speed acceleration in reverse could create a wake that can wash over the transom and flood the boat. Only maneuver in reverse at low speeds.

WARNING

The throttle lever is in the idle position when it is pulled all the way back. Advancing the throttle forward increases the engine RPM.

CAUTION

CAUTION: Never pull the knob or handle out while the engine is in gear. This can cause jamming of the control, possible improper control, or gear selection.

Stopping-You do not have brakes on a boat.

Practice stopping maneuvers and learn early how your boat reacts. From forward motion, pull back the throttle towards NEUTRAL. Depending on your speed, the distance the boat travels until it comes to a complete stop will vary. The ability to measure this distance will only be acquired through experience.

To aid in a quicker stop, the throttle/shift can be moved to the reverse position once it has been returned to NEUTRAL and the engine RPM has decreased to idle speed.

NOTE: Be certain that all persons who operate the boat are acquainted with all facets of boat handling.

Pre-Cruise Check

1. Check the weather forecast. Determine if the cruise planned can be made safely.
2. Be sure all necessary safety equipment is on board and operative. This includes items such as the running lights, horn, spotlight, life saving devices, etc.
3. Ensure an adequate amount of fuel is on board.
4. Be sure you have sufficient water and other provisions on board for the cruise planned.
5. Leave a written message listing details of the planned cruise with a close friend ashore.

1. Secure boat to the dock before attempting to start engine. The boat should be kept secure until the engine is running and warmed up.

Preliminary Checks

The operation and maintenance manual supplied with your engine provides pre-start, starting, and cold-starting instructions. The following information is merely a guide and not intended to explain in detail all starting procedures. Refer to your engine owner's manual.

STARTING PROCEDURES

Starting

6. Always operate the bilge blower for at least four (4) minutes before and while starting the engine, and any time you are operating your boat below cruising speeds. Check the blower output vent for airflow.
7. Make sure the throttle/shift control is in the neutral position.
8. Make sure passengers seated in the bow area do not obstruct the driver's vision.

STARTING PROCEDURES

The operation and maintenance manual supplied with your engine provides pre-start, starting, and cold-starting instructions. The following information is merely a guide and not intended to explain in detail all starting procedures and instructions. **Refer to your engine owner's manual.**

Preliminary Checks

1. Secure boat to the dock before attempting to start engine. The boat should be kept secure until the engine is running and warmed up.
2. Check engine oil level, power steering and power trim fluid levels.
3. Check fuel supply to ensure you have enough fuel for your expected travel plan.
4. Open the engine compartment. Inspect for fuel odors and visible leaks in the fuel, oil, coolant, exhaust, and power steering systems. See your dealer for repairs if any leaks are found, or if there is an accumulation of fuel or oil in the bilge.

DANGER

DANGER: Gasoline vapors are highly explosive. To prevent possible explosion and fire, check the engine and fuel compartments before each engine start for the accumulation of fumes or fuel leakage. Always operate the blower for four (4) minutes before starting engine.

5. If your boat's bilge has collected any water (but not gas or oil) operate the bilge pump until the pump will pump out any more water.

6. Always operate the bilge blower for at least four (4) minutes before and while starting the engine, and any time you are operating your boat below cruising speeds. Check the blower output vent for airflow.
7. Make sure the throttle/shift control is in the neutral position.
8. Make sure passengers seated in the bow area do not obstruct the driver's vision.

Starting

1. If your boat is equipped with an optional battery selector switch, turn the battery switch to 1, 2, or ALL position.
2. Check all electrical systems and navigational lights. Make sure ignition interrupter lanyard is connected to the driver and switch.
3. When cold starting your boat, advance the throttle several times and leave it in the SLOW/START position. This will actuate the carburetor accelerator pump and feed fuel to the engine. Turn ignition key to START position.

NOTE: Engine will not turn over if throttle/shift control is not in the neutral position.

CAUTION

CAUTION: Do not continuously operate starter for more than 15 seconds without pausing. Allow starter to cool at least three (3) minutes between start attempts.

4. If engine fails to start, wait approximately three (3) minutes. Move throttle only once to the maximum position

CAUTION: Acceleration at full throttle is not recommended before the engine "break-in period" has been completed. This "break-in period" also coincides with

CAUTION

Acceleration

boat, the operator should provide adequate ventilation in each of these areas. Utilize all hatches, doors, windows, and side vents to increase air movement. See Section 1 for information about Carbon Monoxide DANGERS.

- then back to the neutral position, and try to start engine again.
- When engine is cold, run engine approximately one (1) to two (2) minutes at fast idle speed (1200 to 1500 RPM).
- Once engine has warmed up, check temperature gauge to ensure engine temperature stays within optimum range. If temperature reading is abnormally high, **stop engine immediately**, and inspect for cause of high reading.
- With engine running, voltmeter should show a reading between 11 and 14 volts.
- Check steering operation. Turn steering wheel to full port and to full starboard while observing outdrive movement.
- Inspect for fuel odors and visible leaks in the fuel, oil, coolant, exhaust, and power steering systems.
- Make sure boat is still securely moored to the dock and engine is idling at 600 to 800 RPM. Then move the throttle forward and then aft, and back to neutral to check for proper operation of the shifting motion.

WARNING

WARNING: Engine and generator exhaust systems produce carbon monoxide (CO), a poisonous gas which is odorless, colorless, and heavier than air. Direct prolonged exposure can result in CO poisoning that may be harmful or fatal. Indications of excessive exposure to CO concentrations may include nausea, dizziness, and drowsiness.

To prevent excessive exposure and reduce the possibility of CO accumulation in the cabin and cockpit areas of the

3.13

- Once engine has warmed up, check temperature gauge to ensure engine temperature stays within optimum range. If temperature reading is abnormally high, **stop engine immediately**, and inspect for cause of high reading.
- When engine is cold, run engine approximately one (1) to two (2) minutes at fast idle speed (1200 to 1500 RPM).
again.
then back to the neutral position, and try to start engine

boat, the operator should provide adequate ventilation in each of these areas. Utilize all hatches, doors, windows, and side vents to increase air movement. See Section 1 for information about Carbon Monoxide DANGERS.

Acceleration

CAUTION

CAUTION: Acceleration at full throttle is not recommended before the engine "break-in period" has been completed. This "break-in period" also coincides with the engine "twenty (20) hour check-up". Therefore, full throttle acceleration should not be attempted until your engine has surpassed this usage time.

Before bringing your boat "on plane," check the entire area to make sure you have a clear, safe path. As you throttle-up and accelerate, your boat's angle of trim increases and causes the boat to ride bow-high. From a maximum angle, the boat will level out to its planing attitude as you continue to accelerate.

The maximum angle is commonly known as the "hump". It is advised to get over the "hump" as quickly as possible due to limitations in visibility, handling, and performance in reaching the maximum angle. It should only take a few seconds at full throttle to get over the "hump". At that point, the boat reaches its planing attitude. After getting over the "hump", accelerate until reaching a comfortable plane, then throttle down to cruising speed. This also will provide for better fuel efficiency.

WARNING

WARNING: Check behind you before coming off plane. Many accidents occur each year as a result of a driver coming off plane ahead of a boat that is unable to slow down in time to avoid collision.

TRIMMING

Always look behind you and to both sides of the boat before slowing down. Tell your passengers your intentions to allow them to make adjustments to their balance or positions. Slowly pull back on the throttle. Glance back and see if a large following wave is approaching the transom. If it is, give the engine a little throttle as the wave arrives to keep the wave from rolling over the transom. Avoid making sharp turns while the boat is slowing.

5. A good practice is to get underway (especially when fully loaded or pulling a skier) with the unit trimmed all the way under or IN. After the boat is on plane, adjust the trim out slightly to obtain the proper bow attitude and engine RPM.
4. If the bow is too high, your drive unit is trimmed up or out too far. Trim IN to correct.
3. In the case of low or heavy bow attitude, the lower unit is normally trimmed too far under or forward. Trim the unit out or up to correct this situation.

Always look behind you and to both sides of the boat before slowing down. Tell your passengers your intentions to allow them to make adjustments to their balance or positions. Slowly pull back on the throttle. Glance back and see if a large following wave is approaching the transom. If it is, give the engine a little throttle as the wave arrives to keep the wave from rolling over the transom. Avoid making sharp turns while the boat is slowing.

TRIMMING**TILT/TRIM Control Switches**

1. The standard trim control switch is usually located on the control lever handle. See your dealer for a complete explanation of trim control switch.
2. The switch controls the "trim" of your boat under various conditions, loads, and uses. Proper trim is very important in boating. Trim refers to the angle of the lower unit in relation to the bottom of the boat.
3. In the case of low or heavy bow attitude, the lower unit is normally trimmed too far under or forward. Trim the unit out or up to correct this situation.
4. If the bow is too high, your drive unit is trimmed up or out too far. Trim IN to correct.
5. A good practice is to get underway (especially when fully loaded or pulling a skier) with the unit trimmed all the way under or IN. After the boat is on plane, adjust the trim out slightly to obtain the proper bow attitude and engine RPM.
6. Trim also affects propeller selection and fuel efficiency. All models should be "propped" to be in the upper half of the maximum RPM range with the boat lightly loaded and the drive trimmed up to maximum. This configuration will allow the engine to operate within the recommended RPM range with a heavy load.

The power unit should never be trimmed up to a point where the propeller cavitates (or slips). A rapid

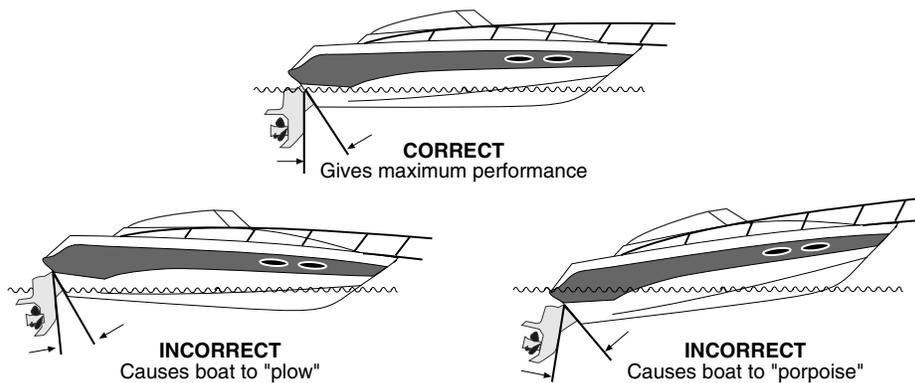


FIGURE 3.3 - TRIM / MOTOR ANGLE

If your boat is equipped with trim tabs you can use them to adjust the boat's trim to the optimum angle for load and water conditions. Trim tabs add lift to the boat's stern, thereby changing the boat's attitude (see Figure 3.4). This

Trim Tabs

On outboard engines without power trim, the trim angle can be controlled by using the following "Rule of Thumb": If the bow runs low or heavy in the water, move the unit out one or two pin hole settings. If the bow runs too high or light in the water, move the unit in towards the transom one or two pin hole settings.

increase in engine RPMs is evidence of cavitation. If this occurs accidentally while running at full throttle, immediately lower the drive trim and reduce the throttle until the slipping stops. Have your dealer reset the trim limit switch to avoid over trimming in the future.

If the prop slips at lower planing speeds, the drive may be trimmed too high. Immediately lower the drive unit until the prop "grabs" again to restore efficiency.

- On performance boats, trimming out, in addition to raising the bow, also lifts the boat higher, gaining speed because of less hull in the water.

WARNING

WARNING: Excessive trim will decrease maneuverability, change steering characteristics, and may cause "porpoising" (bow oscillates up and down) or "chine walking" (rocking from side to side). USE POWER TRIM WITH CARE.

- The high-tilt trailering position of the stern drive is controlled by a separate switch which is located on the control handle, dash, or switch panel. *Do not activate this switch while underway.* This can severely damage the lower unit.

NOTE: Refer to your drive unit(s) instruction manual, or your dealer, regarding the power trim controls installed on your boat.

TILT/TRIM Control Switches - Outboards

On outboard engines equipped with power trim, read the instructions provided by the engine manufacturer for correct usage.

7. On performance boats, trimming out, in addition to raising the bow, also lifts the boat higher, gaining speed because of less hull in the water. If the prop slips at lower planing speeds, the drive may be trimmed too high. Immediately lower the drive unit until the prop "grabs" again to restore efficiency. If the prop slips at lower planing speeds, the drive may be trimmed too high. Immediately lower the drive unit until the slipping stops. Have your dealer reset the trim limit switch to avoid over trimming in the future. Increase in engine RPMs is evidence of cavitation. If this occurs accidentally while running at full throttle, immediately lower the drive trim and reduce the throttle until the slipping stops. Have your dealer reset the trim limit switch to avoid over trimming in the future.

On outboard engines without power trim, the trim angle can be controlled by using the following "Rule of Thumb": If the bow runs low or heavy in the water, move the unit out one or two pin hole settings. If the bow runs too high or light in the water, move the unit in towards the transom one or two pin hole settings.

Trim Tabs

If your boat is equipped with trim tabs you can use them to adjust the boat's trim to the optimum angle for load and water conditions. Trim tabs add lift to the boat's stern, thereby changing the boat's attitude (see Figure 3.4). This lift can help the boat remain on plane at slower speeds than if no tabs were used.

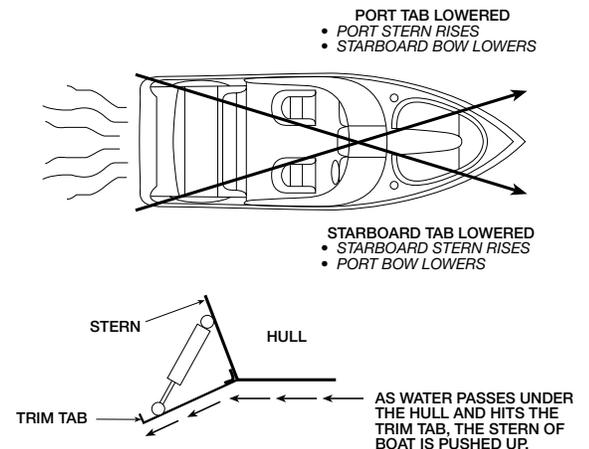


FIGURE 3.4 - TRIMMING WITH TRIM TABS

During one of your first boating expeditions, take the boat out onto open water and experiment with the trim tabs. After you get the boat on plane, set the tabs in various positions and note how the boat reacts. This will give you a

3. Raise the lower unit to the high tilt or trailer position. This is to avoid damage to the propeller or lower unit.
2. Turn OFF all other switches.
1. Turn OFF ignition switch.

ENGINE SHUT DOWN

It is possible to extend the cylinder life expectancy on your trim tabs. To do this, keep the cylinders retracted while at dockside. Press both trim tab controls down until tabs reach their full up position.

feel for how the trim tabs work.



WARNING: Loss of Steering Control! Do not lower the tabs all the way at high speeds. You may lose steering control. Lower tabs a little at a time. Observe effect on boat operation before lowering further.

Used independently, trim tabs can also compensate for seas, winds, or uneven loads.

feel for how the trim tabs work.



WARNING: Loss of Steering Control! Do not lower the tabs all the way at high speeds. You may lose steering control. Lower tabs a little at a time. Observe effect on boat operation before lowering further.

Used independently, trim tabs can also compensate for seas, winds, or uneven loads.

Head Seas	Trim drives in more than usual. Lower tabs to keep bow down and go at a slower speed.
Following Seas	To prevent taking seawater over the bow, trim drives and tabs to keep bow up.
Listing due to Quartering Seas, Beam Wind, or Uneven Load	Use tabs independently to adjust for list. If listing to starboard, lower port tab. If listing to port, lower starboard tab.

Remember that all boats react very slowly to trim tabs. Often operators do not give trim tabs time to work. Press the trim tabs switches for only two seconds at a time and then allow some time for the boat to react. If the boat is still listing after a minute or two, press the trim tab switch again for a two-second interval.

IMPORTANT: Basic safety precautions should always be followed with the operation of trim tabs. Do not step on trim tabs. Injury may occur from slipping.

It is possible to extend the cylinder life expectancy on your trim tabs. To do this, keep the cylinders retracted while at dockside. Press both trim tab controls down until tabs reach their full up position.

ENGINE SHUT DOWN

1. Turn OFF ignition switch.
2. Turn OFF all other switches.
3. Raise the lower unit to the high tilt or trailer position. This is to avoid damage to the propeller or lower unit before removing the boat from the water.
4. After securing the boat to the trailer (if removing from water), remove the drain plug and drain the bilge. If boat is being secured to floating dock, boat house, etc., and will remain in water, drain the bilge by using the boat's bilge pump.

RELOADING YOUR BOAT

1. Back the trailer into the water.
2. When the trailer is in several inches of water:
 - STOP the towing vehicle.
 - Leave manual transmission in gear or place automatic transmission in park.
 - Turn off the engine and set the hand brake.
- NOTE:** If you have a bunk trailer, the trailer may need to be more than several inches in the water before loading.
3. Tilt the boat's stern drive up to the high tilt position to avoid damage while loading.
4. Pull boat up onto trailer and secure safety cable.

- Close and secure all portals and hatches. Stow all time allows.
 - The best possible situation is to return to a safe port if weather channels.
 - Turn radio ON. Dial in local weather station and monitor forecast. If your boat has a VHF radio, check the weather channels.
 - Keep a watch on the horizon for approaching storm indicators.
- tion will help in your safety afloat if storms do occur:
5. Start engine on towing vehicle and pull trailer out of water to boat securing area.
 6. Use tie-downs to secure boat on trailer.
 7. Remove the drain plug.
 8. Make sure stern drive is raised and secure.
 9. Wipe hull down to prevent water spots and keep hull clean.
 10. Make sure everything in the boat is secure or tied down. Place anything loose in towing vehicle.
 11. Reconnect trailer lights. Check that lights are working.

5. Start engine on towing vehicle and pull trailer out of water to boat securing area.
6. Use tie-downs to secure boat on trailer.
7. Remove the drain plug.
8. Make sure stern drive is raised and secure.
9. Wipe hull down to prevent water spots and keep hull clean.
10. Make sure everything in the boat is secure or tied down. Place anything loose in towing vehicle.
11. Reconnect trailer lights. Check that lights are working.

EMERGENCY PROCEDURES

The following information is provided so you, as the operator of your boat, can think about emergencies before they happen. Plan ahead so you will know what to do before you encounter any of these situations.

Storms

Storms sometimes appear without advance notice. Although weather information from meteorological observation and reporting stations is available, weather bureaus are known to have failures in their predictions or information gathering equipment. There is no substitute for a strong understanding of what action to take when the weather takes a turn for the worse. Many marinas fly weather signals. You should learn to recognize these signals and monitor your local weather forecasts before leaving port.

The present and forecasted weather conditions are of primary consideration, but a threat of possible storms should always be a concern. Observance of the following informa-

tion will help in your safety afloat if storms do occur:

- Keep a watch on the horizon for approaching storm indicators.
- Turn radio ON. Dial in local weather station and monitor forecast. If your boat has a VHF radio, check the weather channels.
- The best possible situation is to return to a safe port if time allows.
- Close and secure all portals and hatches. Stow all loose gear below deck and tie down any gear required to remain on deck.
- Reduce speed as the seas build. Make sure all passengers are wearing their PFDs.
- If you lose power, keep the boat headed into the waves by rigging a sea anchor off the bow (Figure 3.5). If there is no sea anchor on board, use a canvas bucket or any object that will offer resistance.

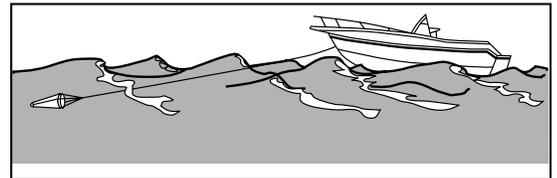


FIGURE 3.5 SEA ANCHOR

- Radar reflectors (if installed on your boat) should be 18 inches diagonally and placed 12 feet above the waterline.

Fog is a result of either warm surface or cold surface conditions. You can judge the likelihood of fog formation by periodically measuring the air temperature and dew point temperature. If the spread (difference) between these two temperatures is small, you likely will incur a fog situation. Remember the following guidelines:

- Turn on running lights.

- As fog sets in, take bearings and mark your position on the chart while continuing to log your course and

Operating in shallow water can present a number of hazards. Sand bars in narrow inlets are constantly shifting, making it difficult to mark them with buoys. Sometimes sand bars are indicated by waves as they form into breakers when passing over sand bars. In coastal areas, tides can change water levels by as much as 30 feet. Check with local marinas or Coast Guard stations for tide tables and current charts.

If your boat runs aground, first check persons aboard for injury. Then check for damage to the boat. If the drive unit strikes an underwater hazard, check for boat and drive unit damage. If the engine vibrates excessively after striking an

Fog

Fog is a result of either warm surface or cold surface conditions. You can judge the likelihood of fog formation by periodically measuring the air temperature and dew point temperature. If the spread (difference) between these two temperatures is small, you likely will incur a fog situation. Remember the following guidelines:

- Turn on running lights.
- As fog sets in, take bearings and mark your position on the chart while continuing to log your course and speed.
- Make sure all persons aboard are wearing their PFDs.
- If your boat has depth finding equipment, take soundings and match them with soundings on your charts.
- Station a person forward on the boat as a lookout.
- Reduce your speed. From time to time, stop engine and listen for fog signals.
- Sound the proper horn or fog bell at proper intervals to warn other boaters.
- If there is any doubt in continuing boat movement, anchor. Listen for other fog signals while continuing to sound the proper fog horn or bell for a boat at anchor.

Running Aground



WARNING: To prevent boat damage, DO NOT use deck hardware or water ski pylon for towing. Use a commercial towing service.

Operating in shallow water can present a number of hazards. Sand bars in narrow inlets are constantly shifting, making it difficult to mark them with buoys. Sometimes sand bars are indicated by waves as they form into breakers when passing over sand bars. In coastal areas, tides can change water levels by as much as 30 feet. Check with local marinas or Coast Guard stations for tide tables and current charts.

If your boat runs aground, first check persons aboard for injury. Then check for damage to the boat. If the drive unit strikes an underwater hazard, check for boat and drive unit damage. If the engine vibrates excessively after striking an underwater obstruction, it may indicate a damaged propeller. If vibration is noticeable, return to port slowly to prevent further drive and engine damage from an out-of-balance condition. Watch the temperature gauge to make sure you do not overheat the engine.

If the boat is not taking on any water, it may be possible to rock the boat by shifting the weight of the passengers and gear and by raising the drive unit while reversing the engine.

If you ground your boat on a sand bar, shut down the engine and seek help from another boater or radio for help. See your dealer as soon as possible, as sand ingested in the engine cooling system can cause major engine damage.

Warning Markers

It is a good idea to find out about hazardous areas and how they are marked by asking your local authorities.

- Boaters must also recognize the flag designs which indicate that scuba divers are present and keep well clear of the area.

- Watch for swimmers. Swimming areas may not be marked. Steer clear from the area and always remain alert.
- Distress flags indicate a fellow boater is in need of assistance.
- Navigation markers serve as a means of identifying navigable routes and indicate water hazards. Boaters should become familiar with navigation markers and stay within marked boundaries and clear of hazards.

Capsizing

Wear PFD's or have them readily available at all times. If your boat capsizes, and others were on board, locate them and guide them to the safety of the hull. Even if the boat floats in an upside-down position, stay with it. The boat hull is much easier for rescuers to spot than a human head sticking out of the water. DO NOT attempt to swim ashore, it may be further than it looks.

Man Overboard

- Watch for swimmers. Swimming areas may not be marked. Steer clear from the area and always remain alert.
- Distress flags indicate a fellow boater is in need of assistance.
- Navigation markers serve as a means of identifying navigable routes and indicate water hazards. Boaters should become familiar with navigation markers and stay within marked boundaries and clear of hazards.

REACTING TO EMERGENCIES

Be prepared to deal with emergencies before they happen. Try to formulate a plan for each type of emergency in advance so that decisions can be made quickly and without hesitation. Precious moments lost can mean the difference between losing and saving a life.

Flooding

If your boat starts taking on water, activate the bilge pump immediately. Make sure all passengers are wearing their PFDs. Open the engine compartment, look for the cause of the flooding. Check all hoses, through hull fittings, sea-cocks and strainers. If flooding occurs as a result of collision or grounding damage, call for assistance and head for shore if possible.

Capsizing and Man Overboard

By far, the largest number of boating fatalities involve capsizing and falling overboard accidents. By being prepared ahead of time with an appropriate plan of action, you can greatly lower your chances and your passengers' chances of becoming seriously injured.

Capsizing

Wear PFD's or have them readily available at all times. If your boat capsizes, and others were on board, locate them and guide them to the safety of the hull. Even if the boat floats in an upside-down position, stay with it. The boat hull is much easier for rescuers to spot than a human head sticking out of the water. DO NOT attempt to swim ashore, it may be further than it looks.

Man Overboard

Think through and follow these procedures if someone in your boat falls overboard.

- Remember, every second counts, you must act fast.
- Move throttles to idle position immediately and yell "MAN OVERBOARD."
- Throw some floating object overboard immediately. Keep your required Type IV PFD accessible at all times for such an emergency.
- Keep the person in the water in sight at all times. Have a passenger do nothing but watch the person. Do not go into the water to help the victim. One person in the water is enough trouble.
- Circle around quickly, approaching into the wind and waves. When the person is alongside, put the engine in neutral and throw them a Type IV PFD with a line attached or extend a paddle or boat hook within his/her reach.

Collision

If a serious collision occurs, you should first check the condition of all passengers aboard, then inspect your boat to determine the extent of damage.

IMPORTANT: All persons aboard should know the location and proper operation of the fire extinguishers.

GUIDELINES

- Use only approved marine cooking and heating systems.
- Open flames demand constant attention.
- Keep flammable materials in approved containers in a overboard vented locker sealed from the interior of the boat.

1. Make sure all persons aboard are wearing their PFDs.
2. If you need help and your boat has a ship-to-shore radio, first contact the U.S. Coast Guard (VHF Channel 16) or other rescue authorities immediately.
3. Prepare to assist the other vessel unless your passengers and/or boat are in danger.
4. If the bow of the other boat penetrated your boat's hull, prepare to block the opening once the boats are separated.
5. Shore up the hole with a spare PFD or bunk cushion from your boat.
6. While blocking the hole, trim the boat so that the hole is out of the water.

Fire

Most fires are caused by electrical problems or careless fueling practices. A fire on board your boat is a serious emergency. You must work quickly to implement safety procedures. If a fire occurs, immediately stop the engine.

1. Make sure all persons aboard are wearing their PFDs.
2. If the fire is small, attempt to put it out with your fire extinguisher. If the fire is in the engine compartment, turn off the bilge blower. Do not open the engine compartment. This feeds oxygen to the fire and may cause it to flare up.
3. If the fire gets out of control, execute a distress signal and call for help if equipped with a ship-to-shore radio.
4. All persons aboard should jump overboard and swim a safe distance away from the flames.

1. Make sure all persons aboard are wearing their PFDs.
2. If you need help and your boat has a ship-to-shore radio, first contact the U.S. Coast Guard (VHF Channel 16) or other rescue authorities immediately.
3. Prepare to assist the other vessel unless your passengers and/or boat are in danger.
4. If the bow of the other boat penetrated your boat's hull, prepare to block the opening once the boats are separated.

IMPORTANT: All persons aboard should know the location and proper operation of the fire extinguishers.

GUIDELINES

- Use only approved marine cooking and heating systems.
- Open flames demand constant attention.
- Keep flammable materials in approved containers in a overboard vented locker sealed from the interior of the boat.
- Ensure ventilation systems are unobstructed.
- Remove mooring covers before starting engine.
- Check the bilge for fuel leaks.
- Extinguish smoking materials carefully.
- Use special care with flame or high temperatures around urethane foam.
- Check cleaning products for flammability.
- Ventilate when cleaning or painting.
- Disconnect electrical system from its power source before performing maintenance.
- Replace breaker or fuse with same amperage device.
- Electrical appliances must be within rated amperage of boat circuits. Observe the boat carefully while the electrical system is being energized.
- Allow only a qualified marine electrician to service the boats electrical system.

If a problem with the steering occurs, shut down the engine immediately. Check the connections to the outboard motor or drive unit in the engine compartment. Some boats have a push/pull cable while others will have hydraulic hose connections. With cable connections, check the attaching hardware and tighten it if necessary. If you have hydraulic hose connections, check to see if they are leaking. If so, tighten the connections and check the hydraulic fluid reservoir level. Most stern drives are power assisted and have their own hydraulic reservoir and engine mounted drive pump. Check the level of reservoir and drive

Steering Failure

Medical Emergency

Accidents while boating can and may happen. Be prepared to handle these emergencies when they happen. Keeping a first aid kit and dry blankets on board can assist during these situations. It is also a good idea to contact your local Red Cross for information and training on first aid and CPR.

Propulsion Failure

Before you call for help regarding an engine or drive unit failure, it is a good idea to eliminate the possibility of simple problems. Turn off the engine and check to see that (1) there is fuel in the tank; (2) the engine cooling intakes on the outdrive are not clogged; (3) props are clean and free of weeds, netting, etc.; (4) no hoses are leaking; (5) there is oil in the engine.

Once you have checked out the possibilities listed above and find they are not the problem, call for help giving your position and a detailed description of your boat.

Control Failure

In the unlikely event of a shift/throttle failure, shut down the engine immediately. Carefully check the control connections in the engine compartment to see if they are secure. If not, try to locate the attaching hardware and reassemble. If that is not possible, try to use whatever is available such as paper clips, hair clips, tape, etc., to secure the connections. If a temporary repair is made, return to port at the slowest steerable speed and be prepared to take emergency action should the temporary repair fail also. Have your dealer make repairs before using the boat again.

Accidents while boating can and may happen. Be prepared to handle these emergencies when they happen. Keeping a first aid kit and dry blankets on board can assist during these situations. It is also a good idea to contact your local Red Cross for information and training on first aid and CPR.

Medical Emergency

Steering Failure

If a problem with the steering occurs, shut down the engine immediately. Check the connections to the outboard motor or drive unit in the engine compartment. Some boats have a push/pull cable while others will have hydraulic hose connections. With cable connections, check the attaching hardware and tighten it if necessary. If you have hydraulic hose connections, check to see if they are leaking. If so, tighten the connections and check the hydraulic fluid reservoir level. Most stern drives are power assisted and have their own hydraulic reservoir and engine mounted drive pump; check the level of reservoir and drive pump belt. If the steering is not operating properly, do not operate the boat and call for assistance.

Propulsion Failure

- Maintenance Terminology**
- 2 = 25 hour check during each boating season
- 3 = Twice during boating season/Every 6 months/Every 100 hours of operation
- 4 = Beginning of boating season/Every 12 months/Every 200 hours of operation

SERVICE & MAINTENANCE SCHEDULE

This section contains a general maintenance schedule and troubleshooting chart. If you do not fully understand the information contained within this section of your owner's manual, or any of the related product service manuals, contact your Larson dealer. Larson Boats recommends maintenance be performed at an authorized Larson dealer. The following information is of a general nature.

This section contains a general maintenance schedule and troubleshooting chart. If you do not fully understand the information contained within this section of your owner's manual, or any of the related product service manuals, contact your Larson dealer. Larson Boats recommends maintenance be performed at an authorized Larson dealer. The following information is of a general nature.

SERVICE & MAINTENANCE SCHEDULE

The following time intervals are intended to be used as a guide under normal operating conditions. Other operating conditions may warrant shorter time intervals. Instructions for performing listed items can be found in either your owner's manual, installed equipment manuals, or by contacting your Larson dealer.

Time Interval Description

1 = 48 hours after launch

2 = 25 hour check during each boating season

3 = Twice during boating season/Every 6 months/Every 100 hours of operation

4 = Beginning of boating season/Every 12 months/Every 200 hours of operation

Maintenance Terminology

Check - to observe for satisfactory conditions, accuracy, safety or performance.

Inspect - to examine closely, in critical appraisal, while testing or evaluating components or systems.

Lubricate - to apply a lubricant (oil, grease, etc.) as specified for reducing friction, heat and wear between solid surfaces.

ITEM	TIME INTERVALS			
	1	2	3	4
Engine & Drive System Perform engine and drive unit maintenance as recommended by manufacturer.				
Inspect:				
Cooling system hoses & clamps		X	X	X
Drive belt tension (all)			X	X
Check:				
Prop for trueness				X
Propellers				X
All thru-hull fittings				X

ITEM	TIME INTERVALS			
	1	2	3	4
Engine & Drive System				
Clean:				
All gauges				X
Spray ignition switch w/contact cleaner				X
Control System				
Adjust throttle and shift				X
Test "neutral" safety switch				X
Lubricate cables and control				X
Steering System				
Inspect linkage and connections			X	X
Adjust steering		X		X
Lubricate steering system				X
AC & DC Electrical System				
Inspect:				
Battery connections			X	X
Battery cable				X
12V wiring and connections				X
Shore power cord and receptacle			X	X
Check:				
Battery water level		X	X	X
Operation of 12V electrical equipment		X		X
Operation of 110V electrical equipment		X		X
All receptacles and connections			X	X
AC wiring				X
Bilge blower operation		X	X	X

ITEM	TIME INTERVALS			
	1	2	3	4
Fuel System				
Inspect:				
For fuel leaks and condition of fuel hoses	X	X	X	X
Fuel pump & filter	X	X	X	X
Fuel tank	X	X	X	X
Clean fuel filter	X	X	X	X
Fresh Water System				

ITEM	TIME INTERVALS			
	1	2	3	4
Fuel System				
Inspect:				
For fuel leaks and condition of fuel hoses		X	X	X
Fuel pump & filter		X	X	X
Fuel tank			X	X
Clean fuel filter		X	X	X
Fresh Water System				
Inspect:				
Fresh water tank				X
Complete system		X		X
Flush water system				X
Ventilation & Drainage				
Check:				
Garboard (Hull) drain	X		X	X
Operation of windshield wing vents				X
Operation of bilge pump(s)		X		X
Clean:				
Vent system			X	X
Bilge pump(s)		X		X
Interior Equipment				
Perform head and stove maintenance as recommended by manufacturer.				
Inspect thru-hull fittings	X	X	X	X
Check stove fuel system				X
Clean:				
Ice chest and refrigerator				X
Cabin and hatch screens				X

ITEM	TIME INTERVALS			
	1	2	3	4
Exterior Equipment				
Check:				
Compass for magnetic deviation				X
Trim tab reservoir fluid level		X		X
Trim tab system for leaks			X	X
Clean navigational lights			X	X
Seating & Canvas				
Clean upholstery				X
Spray upholstery with Lysol™				X
Wash canvas				X
Fiberglass Components & Hull				
Check rail and seat fastenings				X
Clean fiberglass			X	X
Wax hull sides and all non-tread areas				X
Inspect fiberglass areas for damage				X
Perform minor touch-up repairs				X
Sand hull, apply new coat of anti-fouling paint				X

The following troubleshooting procedures are designed to correct minor problems with the engine, inadequate performance, and vibration. The chart shows the problem, cause, and correction in the order of probable occurrence. Refer to your engine manual and use a common sense approach when rectifying problems. If the difficulty appears too complex or risky, contact your Larson dealer or a qualified Larson marine technician.

TROUBLESHOOTING CHART

TROUBLESHOOTING CHART

The following troubleshooting procedures are designed to correct minor problems with the engine, inadequate performance, and vibration. The chart shows the problem, cause, and correction in the order of probable occurrence. Refer to your engine manual and use a common sense approach when rectifying problems. If the difficulty appears too complex or risky, contact your Larson dealer or a qualified Larson marine technician.

Engine

PROBLEM	CAUSE	CORRECTION
Engine will not crank (Ignition system)	Throttle lever in wrong position Loose wire in starting circuit Ignition switch defective Defective solenoid Battery switch in OFF position Dead battery Spark plug(s) fouled or broken Distributor cap broken, wet, cracked, or dirty	Check position of throttle lever, ensure it's in the NEUTRAL position. Tighten all wiring connections. Test switch continuity. Replace switch as required. Replace solenoid. Turn dual battery switch to battery setting #1 or #2; if equipped. Recharge or replace battery. Clean, adjust gap, or replace. If wet or dirty, wipe with cloth and cleaning solvent. Inspect cap for cracks, carbonized paths (inside and out); replace cap as required.

DANGER: Do Not disconnect or reconnect battery cables if gasoline fumes are present.



CAUTION: Disconnect all battery cables before performing maintenance, inspections, checks, and repairs.



CAUTION: Disconnect all battery cables before performing maintenance, inspections, checks, and repairs.



DANGER: Do Not disconnect or reconnect battery cables if gasoline fumes are present.

PROBLEM	CAUSE	CORRECTION
Engine will not crank (Ignition system) (continued)	Hydrostatic lock	Remove spark plugs and crank engine. If engine cranks water is entering cylinders from exhaust system, or from a possible gasket leak. If water enters engine through exhaust line, improper draining of exhaust system exists. Contact your Larson dealer or a qualified marine mechanic to correct problem.
Engine cranks but will not start	Lack of fuel	Clean fuel filter, check fuel level, and check anti-siphon valve.
	Improper starting procedure	See your engine manual to review starting procedure.
	Choke plate sticking	Check thermostatic spring housing adjustment.
	Clogged fuel filter	Check fuel filter, replace if required.
	No fuel reaching carburetor (providing all fuel valves are open)	Check fuel pump, fuel pump filter, carburetor fuel filter, and fuel tank line for cracked flanges or restricted fittings, check anti-siphon valve.
	Engine flooded	Do not attempt to start engine for at least 5 minutes. For hot engine, fully advance throttle once, return throttle to NEUTRAL then crank engine
	Contaminated fuel	Inspect for water or other contaminants in fuel. If contaminated, drain tank and flush with fresh fuel.
	Ignition interrupter switch	Connect lanyard to switch and driver.

PROBLEM	CAUSE	CORRECTION
Low cranking speed	Loose or dirty electrical connections or damaged wiring Bad battery Engine oil too heavy for current temperature	Check all related electrical connections and wires. Test battery (See your engine manual). Drain oil and refill with correct grade and viscosity oil (See your engine manual). Charge battery, change dual battery (See your engine manual).
Starter will not crank engine	Discharged battery Corroded battery cables Loose connection in starting circuit Defective starter switch Starter motor brushes dirty Jammed starter drive	Charge battery, change dual battery switch to ALL; if equipped. Clean terminals. Check and tighten all connections. Replace switch. Clean or replace brushes. Loosen starter motor, then free locked gear.
Poor acceleration	Accelerating pump Throttle not fully open Ignition or carburetor Flame arrestor dirty or air intake obstructed Engine overheating	Replace. Inspect cable and linkages for binding, obstructions, or loose fasteners. Service ignition system and carburetor. Clean flame arrestor and check air intake. Check engine temperature (See your engine manual).

PROBLEM	CAUSE	CORRECTION
Low cranking speed	Loose or dirty electrical connections or damaged wiring Bad battery Engine oil too heavy for current temperature	Check all related electrical connections and wires. Test battery (See your engine manual). Drain oil and refill with correct grade and viscosity oil (See your engine manual).
Starter will not crank engine	Discharged battery Corroded battery cables Loose connection in starting circuit Defective starter switch Starter motor brushes dirty Jammed starter drive	Charge battery, change dual battery switch to ALL; if equipped. Clean terminals. Check and tighten all connections. Replace switch. Clean or replace brushes. Loosen starter motor, then free locked gear.
Poor acceleration	Accelerating pump Throttle not fully open Ignition or carburetor Flame arrestor dirty or air intake obstructed Engine overheating	Replace. Inspect cable and linkages for binding, obstructions, or loose fasteners. Service ignition system and carburetor. Clean flame arrestor and check air intake. Check engine temperature (See your engine manual).

PROBLEM	CAUSE	CORRECTION
Engine runs but misfiring	Fouled spark plug(s) Improper timing Wet spark plug wires Carbon tracked distributor	Remove and clean, replace as required. Check timing and adjust as required (See your engine manual). Inspect wires, wipe dry, replace damaged wires. Clean, replace as required.
	Loose ignition wires Cold engine with improperly set choke Defective fuel pump Partially clogged fuel filter Incorrect carburetor mixture Contaminated fuel	Inspect all wire connections. Check your engine manual for proper choke setting. Repair, replace as required. Clean fuel filter, replace as required. See your engine manual for proper carburetor adjustment. Drain fuel tank and flush clean; replace fuel filter.

PROBLEM	CAUSE	CORRECTION
Engine runs but misfiring	Fouled spark plug(s) Improper timing Wet spark plug wires Carbon tracked distributor Loose ignition wires Cold engine with improperly set choke Defective fuel pump Partially clogged fuel filter Incorrect carburetor mixture Contaminated fuel	Remove and clean, replace as required. Check timing and adjust as required (See your engine manual). Inspect wires, wipe dry, replace damaged wires. Clean, replace as required. Inspect all wire connections. Check your engine manual for proper choke setting. Repair, replace as required. Clean fuel filter, replace as required. See your engine manual for proper carburetor adjustment. Drain fuel tank and flush clean; replace fuel filter.
Excessive fuel consumption	Restriction in flame arrestor Faulty fuel pump Dirty flame arrestor screen Distributor breaker points or spark plugs improperly set or bad Incorrect timing	Remove and clean flame arrestor. Repair, replace as required. Clean, replace as required. Clean, set or replace breaker points and spark plugs. Time engine.

Blue exhaust smoke	Lube level too high Oil too thin	Drain off excessive oil. Drain and replace oil (See your engine manual).
Excessive fuel consumption (continued)	Float level too high Choke not properly adjusted	Reset float level as required (See your engine manual). Adjust choke as required.
PROBLEM	CAUSE	CORRECTION

PROBLEM	CAUSE	CORRECTION
Excessive fuel consumption (continued)	Choke not properly adjusted Float level too high	Adjust choke as required. Reset float level as required (See your engine manual).
Blue exhaust smoke	Lube level too high Oil too thin Oil overheated	Drain off excessive oil. Drain and replace oil (See your engine manual). Check cooling system.
Black or gray exhaust smoke	Fuel mixture too rich Choke locked Poor carburetor setting Carburetor fuel level too high Clogged flame arrestor	Adjust carburetor. Lubricate and adjust. Readjust carburetor (See your engine manual). Adjust carburetor float. Clean, replace as required.
White exhaust smoke	Engine misfiring Spark plugs dirty or not gapped correctly Engine overheating	See your engine manual. Clean, adjust gap, replace as required
Low oil pressure	Insufficient oil in crankcase	Check and add correct grade and viscosity oil. Visually check engine for leaks.

PROBLEM	CAUSE	CORRECTION
Low oil pressure (continued)	Excessive oil in crankcase Diluted or improper grade and viscosity oil Oil leak in pressure line	Check and remove any excess amount of oil. Check for cause of excessive oil (improper filling, bad fuel pump, etc.). Change oil and oil filter, using the correct grade and viscosity oil. Inspect all oil lines and tighten all connections as necessary.

PROBLEM	CAUSE	CORRECTION
Low oil pressure (continued)	Excessive oil in crankcase Diluted or improper grade and viscosity oil Oil leak in pressure line	Check and remove any excess amount of oil. Check for cause of excessive oil (improper filling, bad fuel pump, etc.). Change oil and oil filter, using the correct grade and viscosity oil. Inspect all oil lines and tighten all connections as necessary.
No oil pressure	Defective gauge, gauge tube, or oil line No oil in engine	Replace gauge, or tube, and tighten or replace line as necessary. Fill with proper grade and viscosity oil (See your engine manual).
High oil pressure	Oil grade too heavy Dirt or obstruction in oil lines	Drain oil and replace with proper grade (See your engine manual). Drain and clear oil system. Check for bent or flattened oil lines, replace as required.
Knocking or pinging	Incorrect fuel Incorrect timing Pre-ignition Overheated engine Cooling system trouble	Drain tank, replace with proper fuel. Time engine (See your engine manual). Clean or replace spark plugs, check engine timing. Check engine cooling system. Check water intake connections for leaks.

4.10

Rough running	<p>Choke not operating</p> <p>Faulty fuel pump</p> <p>Idle speed too low</p> <p>Faulty ignition system components</p>	<p>Check choke linkages for binding or obstruction.</p> <p>Refer to your engine manual for fuel pump testing procedures.</p> <p>Check idle speed, adjust as required.</p> <p>Service ignition system (See your engine manual)</p>
PROBLEM	CAUSE	CORRECTION

PROBLEM	CAUSE	CORRECTION
Rough running	<p>Choke not operating</p> <p>Faulty fuel pump</p> <p>Idle speed too low</p> <p>Faulty ignition system components</p> <p>Clogged fuel filter</p> <p>Contaminated fuel</p> <p>Fuel lines or fuel tank vent line kinked or clogged</p> <p>Flame arrestor plugged with foreign material or air intake hose obstructed</p>	<p>Check choke linkages for binding or obstruction.</p> <p>Refer to your engine manual for fuel pump testing procedures.</p> <p>Check idle speed, adjust as required.</p> <p>Service ignition system (See your engine manual).</p> <p>Replace fuel filter.</p> <p>Inspect fuel for water or other contaminants. If contaminated, drain tank then flush with fresh fuel.</p> <p>Use compressed air (20 psi or less) to blow out obstruction. Replace line if kinked.</p> <div style="text-align: center; border: 1px solid black; padding: 2px; width: fit-content; margin: 10px auto;"> ▲WARNING </div> <p>WARNING: Wear protective eye wear when performing compressed air cleaning.</p> <p>Clean flame arrestor and check hose.</p>
Engine overheating	<p>Bad sending or receiving unit</p> <p>Loose wiring connections at sending or receiving unit</p>	<p>Replace unit(s).</p> <p>Tighten all connections.</p>

PROBLEM	CAUSE	CORRECTION
Engine overheating (continued)	Worn or broken impeller in seawater pump Clogged oil cooler Exhaust lines plugged Ignition timing late	Replace impeller. Remove obstruction. Remove obstruction. Time engine.
	Choke valve locked closed	Free choke valve movement.
	Collapsed water pump suction hose	Install new hose.
	Loose or worn belts	Adjust or replace belts as required.
	Restricted water intake	Clean water intake.

PROBLEM	CAUSE	CORRECTION
Engine overheating (continued)	Worn or broken impeller in seawater pump Clogged oil cooler Exhaust lines plugged Ignition timing late Choke valve locked closed Collapsed water pump suction hose Loose or worn belts Restricted water intake	Replace impeller. Remove obstruction. Remove obstruction. Time engine. Free choke valve movement. Install new hose. Adjust or replace belts as required. Clean water intake.
Sludge in oil	Infrequent oil changes Dirty oil filter Water in oil	Drain, then refill with proper grade and viscosity oil. Replace oil filter. Drain, then refill. If trouble persists, check for cracked block, defective head gasket, or cracked head.
Inadequate Performance	Damaged or improper propeller. Excessive water in bilge area. Boat overloaded or improper distribution of load. Fouled or damaged hull bottom.	Inspect propeller, replace if required. Pump out bilge area. Inspect for cause of excess water. Reduce load or redistribute load. Inspect, clean, or repair as required.

Inspect propeller, replace as required. Replace shaft. Inspect and tighten as required. See your engine manual.	Propeller bent or pitch out of true. Damaged propeller shaft. Loose engine mounting bolts. Engine out of alignment.	Vibration
<i>CORRECTION</i>	<i>CAUSE</i>	<i>PROBLEM</i>

<i>PROBLEM</i>	<i>CAUSE</i>	<i>CORRECTION</i>
Vibration	Propeller bent or pitch out of true. Damaged propeller shaft. Loose engine mounting bolts. Engine out of alignment.	Inspect propeller, replace as required. Replace shaft. Inspect and tighten as required. See your engine manual.

You may want to have the hull of your boat coated with an anti-fouling paint. Again, see your Larson dealer for application and cost.

IMPORTANT: If your boat will be in water continuously for two or more weeks, **Larson Boats recommends sealing the hull bottom with a high quality barrier coating.** Unsealed gelcoat may form water blisters. Repair of water blister damage is not covered under the Larson Boats Warranty. Contact your Larson dealer for further information.

Properly used and maintained, your boat will give you years of service and enjoyment. By keeping your boat "shipshape", you will be doing more than protecting your investment; you will also ensure good performance and safety on the water.

The first step in ensuring good performance is keeping your boat clean, particularly below the waterline where a build up of scum, algae, or other marine growth can rob you of performance and fuel efficiency.

LARSON Better Built Boats. **CARE & APPEARANCE** 5

Properly used and maintained, your boat will give you years of service and enjoyment. By keeping your boat "shipshape", you will be doing more than protecting your investment; you will also ensure good performance and safety on the water.

The first step in ensuring good performance is keeping your boat clean, particularly below the waterline where a build up of scum, algae, or other marine growth can rob you of performance and fuel efficiency.

NOTE: Before attempting to use a particular cleaning solution or method for cleaning, test the material to be cleaned in a hidden or inconspicuous area for possible adverse reactions.

DECK AND HULL CARE

IMPORTANT: Avoid walking on soiled fiberglass surfaces to prevent scratching and dulling of the finish. Wire brushes, scouring pads, or other abrasive type materials/solutions should never be used on the deck or hull of your boat. They create small scratch marks that will collect marine growth and other foreign materials.

The finish on your boat is made of highly durable marine gelcoat and with proper care, will last for many years, retaining its lustrous appearance. Algae, forms of marine growth, and barnacles (in salt water) are extremely hard to remove once firmly attached to the bottom of your hull. To avoid attachment of barnacles or marine plant life, it is recommended you wash the bottom of your hull after every outing. In addition, it is a good idea to completely hose down the boat after use, especially in salt water areas. Consult your Larson dealer for deck and hull commercial cleaners and their use.

You may want to have the hull of your boat coated with an anti-fouling paint. Again, see your Larson dealer for application and cost.

IMPORTANT: If your boat will be in water continuously for two or more weeks, **Larson Boats recommends sealing the hull bottom with a high quality barrier coating.** Unsealed gelcoat may form water blisters. Repair of water blister damage is not covered under the Larson Boats Warranty. Contact your Larson dealer for further information, and help in selecting the proper coating for your boat.

Once your deck and hull have been cleaned, (except for heavy grime or oil, a mild detergent and water will suffice- DO NOT USE ABRASIVES) you are ready for a wax application to bring back the original sheen of your hull. If your deck and hull have oxidized (a light white milky film), you may want to use a rubbing compound before waxing. Ask your Larson dealer to recommend a good commercial product.

WARNING

WARNING: Waxing your deck brings back luster but also makes the deck slippery!

It is a good idea to wax your boat at least twice a year. Keep the interior and exterior of your boat in nice condition, and inspect your boat regularly to keep minor problems from becoming major ones. REMEMBER, AN OLDER BOAT IN NEARLY NEW CONDITION RETAINS A HIGH RESALE VALUE.

Bottom Paint (Anti-fouling)

Anti-fouling bottom paint is designed to dissolve slowly to prevent marine growth. Therefore, the hull bottom should be repainted at the end of the boating season. Factors to take into consideration when selecting a protective bottom paint are: water temperature, pollution, salinity, current, and organic material in the water.

IMPORTANT: Consult with your Larson dealer for recommended bottom paints and local laws that govern your area. Many states regulate the chemical content of bottom paints to meet environmental standards and regulations.

scratched or chipped over a period of time. Superficial scratches present little problem since they can usually be rubbed out with a compound cleaner.

"Hairline cracks" or "spider webbing" may develop in the gelcoat surface of a hull or deck. This can be caused by weathering, impact, or other factors. Small blisters or gouges may also occur through normal wear. These do not affect the strength of the hull or deck and can easily be repaired by you or your Larson dealer.

The affected area should be chipped or sanded away and a thin layer of color-matched gelcoat applied. This layer is

Bottom Paint (Anti-fouling)

Anti-fouling bottom paint is designed to dissolve slowly to prevent marine growth. Therefore, the hull bottom should be repainted at the end of the boating season. Factors to take into consideration when selecting a protective bottom paint are: water temperature, pollution, salinity, current, and organic material in the water.

IMPORTANT: Consult with your Larson dealer for recommended bottom paints and local laws that govern your area. Many states regulate the chemical content of bottom paints to meet environmental standards and regulations.

1. Scrub hull bottom with a bristled brush and solution of soap and water.

NOTE: Repainting hull bottom is not required after each scrubbing unless bare areas are visible in the bottom paint.

2. Sand entire bottom surface of boat.
3. Fair (smooth-out) all rough areas as required.
4. Clean bottom surface to remove all dust and foreign materials.
5. Make sure bottom surface is completely dry.
6. Apply new coat of bottom paint.

NOTE: Always follow manufacturer's procedures and recommendations concerning application of paint and drying time before putting your boat in the water.

Fiberglass Repair

Although your deck and hull have been designed to withstand normal use, it is inevitable that surfaces will become

scratched or chipped over a period of time. Superficial scratches present little problem since they can usually be rubbed out with a compound cleaner.

"Hairline cracks" or "spider webbing" may develop in the gelcoat surface of a hull or deck. This can be caused by weathering, impact, or other factors. Small blisters or gouges may also occur through normal wear. These do not affect the strength of the hull or deck and can easily be repaired by you or your Larson dealer.

The affected area should be chipped or sanded away and a thin layer of color-matched gelcoat applied. This layer is then sanded smooth and buffed back to its original luster. Your Larson dealer can obtain color-matched gelcoat and further instructions from the manufacturer.

Fiberglass hulls are tough but like hulls of any other materials, they can be damaged. A fiberglass hull has virtually no internal stresses. Thus, when a part is broken or punctured, the rest of the hull retains its shape. A severe blow will either be absorbed or result in a definite, localized break. In the case of a break of this nature, the boat should be returned to your Larson dealer for repair.

You will need the following items for minor repairs:

- Gelcoat
- DDM (clear liquid catalyst)
- Putty knife or equivalent
- Razor blade
- Fine sandpaper (400 to 600 grade)
- Wax paper (piece big enough to cover repair)

WARNING

WARNING: Gelcoat and fiberglass resin are flammable; work in well ventilated area free from any and all fire hazards.

Inspect all hardware and fittings to make sure they are secure. All screws, bolts, clamps, cleats, etc., must be tight.
 CLEANING HARDWARE.
 THE USE OF DETERGENTS OR ABRASIVES WHEN application of commercial aluminum or chrome cleaner. For excessively dirty or oily hardware, use alcohol. AVOID be cleaned with water and a cloth, followed with either an Chrome, stainless steel, and aluminum hardware should

Hardware and Fittings

FOR MINOR REPAIRS FOLLOW THIS PROCEDURE:

1. Clean the area to be repaired and clear it of wax and oil.
2. Thoroughly clean out nicks, chips and scratches.
3. Sand area to be repaired so gelcoat will bond.
4. IN A SEPARATE CONTAINER, MEASURE ONLY THE AMOUNT OF GELCOAT YOU NEED. Mix a 2% ratio of catalyst to the amount of gelcoat being used (a spoonful of gelcoat will require only a drop or two of

FOR MINOR REPAIRS FOLLOW THIS PROCEDURE:

1. Clean the area to be repaired and clear it of wax and oil.
2. Thoroughly clean out nicks, chips and scratches.
3. Sand area to be repaired so gelcoat will bond.
4. IN A SEPARATE CONTAINER, MEASURE ONLY THE AMOUNT OF GELCOAT YOU NEED. Mix a 2% ratio of catalyst to the amount of gelcoat being used (a spoonful of gelcoat will require only a drop or two of catalyst).

NOTE: DO NOT pour any unused portions of the gelcoat/catalyst mixture back into either original container.

5. Apply gelcoat to area leaving a slight lift above the surface.
6. Cover with wax paper (lack of oxygen helps mixture set) and let set 20 to 30 minutes.
7. Remove wax paper and shave off excess gelcoat with a razor blade.
8. By the time the area is shaved smooth, you are ready to sand (Use 400 to 600 grade sandpaper, NO SUBSTITUTES).
9. Rub or buff the fiberglass with automotive cleaner compound, then wax.

Some discoloration may occur if your boat has weathered. For your first attempt at repair, experiment on an area not normally visible. With a little experience, even the novice can repair a scratch with few, if any, visible repair marks.

Hardware and Fittings

Chrome, stainless steel, and aluminum hardware should be cleaned with water and a cloth, followed with either an application of commercial aluminum or chrome cleaner. For excessively dirty or oily hardware, use alcohol. AVOID THE USE OF DETERGENTS OR ABRASIVES WHEN CLEANING HARDWARE.

Inspect all hardware and fittings to make sure they are secure. All screws, bolts, clamps, cleats, etc., must be tight.

UPHOLSTERY

Your boat's seats and vinyl upholstery should be kept as clean as the exterior finish to prolong life and beauty.

Seat Coverings & Vinyl

The seat coverings and vinyl trim are made of temperature resistant vinyl.

1. Always try to clean up spills quickly to prevent staining.
2. Clean dirt and smudges with mild soap and warm water. If necessary, scrub with a soft bristle brush to remove dirt from textured vinyl. Dry with a soft, lint-free cloth or towel.
3. MSG Final Finish Cleaner is recommended for cleaning your interior vinyl. It may be purchased from your local dealer.
4. Certain household cleaners, powdered abrasives, steel wool and industrial cleaners can cause damage and discoloration and are not recommended. Dry cleaning fluids and lacquer solvents should not be used as they will remove the printed pattern and gloss. Waxes

Scrub indoor/outdoor carpeting with a brush using mild detergent and warm water, then thoroughly rinse with clear water. Allow carpet to dry completely before use. Apply a light coating of Scotch Guard® to protect against accidental spills.

Interior

Exterior

CARPETING

should be used with caution. Many contain dyes or solvents that can permanently damage the protective coating.

5. Periodic applications of a vinyl protection solution will help keep vinyl clean and pliable. 303 Protectant is recommended and may be purchased from your local dealer. Follow instructions provided by vinyl manufacturer. Check cleaning solution labels before using. **Do not** use 409® cleaner or Armor All®.
6. Removable outside seat cushions should be placed inside when not in use.

Interior Fabrics

Treat the fabric upholstery the same as home fabric upholstery. Vacuum and shampoo to maintain upholstery clean and odor free. Spray with Lysol™ or other disinfectant to prevent the build up of mildew.

WINDSHIELDS AND WINDOWS

IMPORTANT: Never use acetone, benzene, carbon tetrachloride, lacquer thinner, or similar type solvents. They penetrate the glass surfaces and cause hazing which will obstruct visibility.

Safety glass windows and windshields may be cleaned just like those in a car. Plastic windshields and port windows should be cleaned with clear water. After dirt is removed, use a plastic window cleaner and non-abrasive polish. Vibration may loosen windshield fasteners and braces during normal use. These should be checked periodically for tightness.

CARPETING

Exterior

Scrub indoor/outdoor carpeting with a brush using mild detergent and warm water, then thoroughly rinse with clear water. Allow carpet to dry completely before use. Apply a light coating of Scotch Guard® to protect against accidental spills.

Interior

Vacuuming and occasional carpet shampoo are recommended for extended life and appearance. Apply a light coating of Scotch Guard® to protect against accidental spills.

CANVAS

Convertible and bimini-tops are designed and intended to provide coverage of the helm seating areas from the sun. These tops are not a weather cover and will be damaged by accumulation of rain water. While these tops are intended to provide ample weather protection for the helm, the tops are not completely weather tight like a winter storage cover. To prevent exterior helm seat cushions from getting wet, it is recommended that all removable exterior cushions be removed and properly stored when helm cover is installed.

Larson does not warrant damage to vinyl tops that might occur when a boat is being towed on a trailer with the top up, and does not warrant shrinkage, mildew, or other normal deterioration.

Cleaning

IMPORTANT: **Do not** use hot water, dry in an automatic dryer, dry clean or steam press canvas.

6. Removable outside seat cushions should be placed inside when not in use.
 5. Periodic applications of a vinyl protection solution will help keep vinyl clean and pliable. 303 Protectant is recommended and may be purchased from your local dealer. Follow instructions provided by vinyl manufacturer. Check cleaning solution labels before using. **Do not** use 409® cleaner or Armor All®.
- vents that can permanently damage the protective coating.
- should be used with caution. Many contain dyes or sol-

1. Keep the top up in rain or when boat is not in use.

Care

3. Brush or sweep underside of the top. Spray with Lysol™ or other disinfectant to prevent mildew.
2. Use a mild solution of ammonia/water and scrub for heavy soil or mildew build-up. Be sure to rinse thoroughly.
1. Wet down all canvas. Use a soft bristle brush and scrub with a mild detergent and water solution.

1. Wet down all canvas. Use a soft bristle brush and scrub with a mild detergent and water solution.
2. Use a mild solution of ammonia/water and scrub for heavy soil or mildew build-up. Be sure to rinse thoroughly.
3. Brush or sweep underside of the top. Spray with Lysol™ or other disinfectant to prevent mildew.

Care

1. Keep the top up in rain or when boat is not in use.
2. Lubricate zippers with paraffin, and snaps with petroleum jelly.
3. If a leak occurs along a canvas seam, rub with paraffin or apply a light coating of Scotch Guard®.
4. Air dry all canvas material before storing. Never store canvas while damp or wet, and provide proper ventilation to prevent mildew.
5. Avoid mooring under trees.
6. Never tow your boat with the top up.
7. When not in use, remove the top and store in the boot on board your boat.

This section of your owner's manual will assist you in preparing your boat for prolonged storage. When cold weather has arrived, or a change in your boats usage requires extended storage, we suggest you follow the guidelines contained within this section. For areas that do not require seasonal storage, Larson Boats recommends a thorough annual inspection.

IMPORTANT: Consult your engine manual for specific instructions covering winterization of the engine. For recommended cleaning solutions and procedures referenced, see Section IV. Maintenance of your owner's manual.

REMOVING BOAT FROM WATER

If you do not store your boat on a trailer, it may be necessary to lift your boat out of the water. Consult with your dealer or marina operator when deciding how to remove your boat. Your boat has structural components designed to support the boat when it is being lifted. Your dealer or marina operator should have the knowledge and equipment to safely lift your boat. Prior to lifting your boat, be sure to remove all water from the bilge and drain all water and waste tanks. Consult your dealer or marina operator for the proper cradle to support your boat while it is out of the water.

PRIOR TO STORAGE

Hull

- 1. Scrape off any barnacles or crusted marine growth.
- 2. Scrub the hull thoroughly to remove marine growth and scum.

- 3. Inspect the underwater gear and propellers for excessive wear or damage.
- 4. Remove the hull drain plug and store in a safe place.

Deck

- 1. Wash the deck, superstructure and cockpit.
- 2. Clean all deck hardware (i.e. cleats, rails, instruments, etc.) and apply a coat of metal polish or wax.
- 3. Clean the indoor/outdoor carpet.

ENGINE, SYSTEMS & COMPONENTS

- 1. Drain the engine block(s) and manifolds.
- 2. Drain the outdrive and change lubricant. (Your Larson dealer will perform No. 1 and No. 2 for a moderate fee.)

IMPORTANT: In regions where temperatures fall below freezing, all engine plugs must be removed before storing your boat for the winter. Failure to do so will seriously damage the engine. Freeze damage is not covered by the Larson Warranty. Make sure your boat's engine is slightly bow up during the extended storage period.

Fuel System

Fill the fuel tank completely, or empty completely. Either method will minimize condensation. You may want to add a gasoline stabilizer solution to the fuel, if the tank is to remain full. Follow the product manufacturer's recommended procedure.

Engine Lubrication

1. Drain oil when engine is warm. This will ensure complete drainage of oil. If the engine oil contains sludge, use a flushing oil to clean away the residue. Refer to your engine manual.
2. Replace the engine oil filter.
3. Fill the crankcase(s) with the required quantity of recommended engine oil as specified in your engine manual.
4. Start the engine.
5. Pour or spray fogging oil through the carburetor air intake. Continue to pour or spray fogging oil until the engine stops.
6. Clean and lubricate all linkage.
7. Spray the entire exterior surface of the engine with a rust and corrosion inhibitor.
8. Have the engine alignment checked and adjusted by a qualified marine technician.
9. Inspect all gaskets and seals, grease the U-joints, and change gear oil.
10. Remove the propeller. Clean and lubricate the prop shaft and check for damage.

Cooling System

To prevent corrosion damage, drain the cooling system before extended storage or when freezing weather threatens.

1. When draining the cooling system, make sure all plug openings are free of obstructions and marine growth.
2. Fill the cooling system with anti-freeze and fresh water to provide additional corrosion and freeze-up protection. Mix anti-freeze according to label directions for the lowest expected temperature.

Fresh Water System

1. Open all faucets and allow pump to empty water tank and intake lines. Run pump dry, for one to two minutes, before turning off pump.
 2. Open all drains.
 3. Disconnect discharge and intake hoses from pump.
 4. Allow pump to run to force all water from unit.
- NOTE:** Running pump when dry will not damage it.
5. Reconnect all hoses.
 6. In climates subject to freezing temperatures, add properly mixed RV type anti-freeze solution to tank. Turn on pump, open each faucet until a small amount of anti-freeze runs out, close faucets.
 7. Turn off pump.

Marine Sanitation Device (MSD)

Improper winterizing can cause your MSD to fail. In salt water environments, the toilet bowl should be filled with fresh water and allowed to stand for several days. This will ensure that any accumulated salt has sufficient time to dissolve. Consult the manufacturer's instruction manual for detailed winterization procedures.

3. If it is necessary to store cushions on board:
 1. Scrub all interior surfaces including cupboards, cabinets and drawers.
 2. Be sure to remove everything that can hold moisture and cause mildew. Remove and store OFF the boat, all cushions, mattresses, curtains, blankets and sheets, pillows, towels, and clothing.

INTERIOR CLEANING

Remote Bilge Pump

If your boat is equipped with a remote bilge pump, it must be completely drained if your boat will be exposed to freezing temperatures.

Battery

1. Remove battery, check water level, and store away from freezing temperatures.

IMPORTANT: Battery should be stored in a cool dry place.


WARNING

WARNING: To prevent personal injury, wear goggles, rubber gloves and a protective apron when working with battery. Battery electrolyte can cause severe eye damage and burns to the skin. In case of spillage, wash area with a solution of baking soda and water.

2. Clean outside battery case, terminals, and battery clamps with a solution of baking soda and water.

NOTE: Do not allow baking soda/water solution to enter the cells.

3. Lightly sand battery posts and clamps with fine grit emery cloth.
4. Apply a light coat of petroleum jelly to the cover end of the battery cables.
5. A monthly recharge or continuous trickle charge should be applied to the battery during storage.

IMPORTANT: Battery should be stored in a cool dry place.

1. Remove battery, check water level, and store away from freezing temperatures.

Battery

If your boat is equipped with a remote bilge pump, it must be completely drained if your boat will be exposed to freezing temperatures.

Remote Bilge Pump

INTERIOR CLEANING

1. Scrub all interior surfaces including cupboards, cabinets and drawers.
2. Be sure to remove everything that can hold moisture and cause mildew. Remove and store OFF the boat, all cushions, mattresses, curtains, blankets and sheets, pillows, towels, and clothing.
3. If it is necessary to store cushions on board:
 - Open all zippers and elevate cover away from the foam padding.
 - Place a small plastic bowl or other round blunt object inside the cushion to allow for adequate air circulation.
 - Seats that can be folded should be stored in the down position.
 - Use plastic seat covers to keep out dampness and protect against mildew.
4. Make sure the cabin is well ventilated.
5. Personal flotation devices (PFDs) and other safety equipment must be cleaned and dried. If left on board, place them where air can circulate around them.
6. Clean and thoroughly dry the bilge area. Remove all rags, sponges, or other cleaning materials from bilge area.
7. Before storing your boat, make sure all interior areas are dry, including carpet, upholstery, bilge, cabinets, etc. Never cover a wet boat for extended periods. Allow the interior to air out for a few days prior to stor-

6. Apply petroleum jelly or marine grade grease on posts and clamps to eliminate air pockets and corrosion build up.
- IMPORTANT: Do not** apply petroleum jelly or marine grade grease before connecting and tightening clamps.
5. Attach the battery cables and tighten the cable clamps.
4. Inspect all battery wiring. Repair or replace if necessary.
3. Check the charge on the battery. Recharge or replace if necessary.

age. Failure to dry boat's interior before storage may cause damage to the interior that is not covered under the boat's warranty.

8. If you store your boat outside, we recommend that you do not store with the canvas and bow set on. Cover with a storage cover, tarp or plastic (available from Larson Dealers)-especially if you live in an area of heavy snow. Whatever material you use for a cover, be sure the boat is properly ventilated.

NOTE: After cleaning, make sure everything is thoroughly dry and air can circulate freely throughout the inside of your boat.

IF YOU STORE YOUR BOAT ON A TRAILER

1. Loosen all tie-downs to relieve the stress on the hull.
2. Place blocks under the axles if tires are to come in contact with damp ground.
3. Repack the trailer wheel bearings.
4. Store with the bow up, and remove the drain plug to allow for any excess water to drain.

RECOMMISSIONING

1. Inspect the fuel system and all associated equipment for proper connections, corrosion, leaks, or other damage. Always be alert for the odor of fuel vapors.

IMPORTANT: For detailed information concerning recommissioning of the engine, refer to your engine manual.

2. Clean battery terminal posts with a wire brush or steel wool before installing.

3. Check the charge on the battery. Recharge or replace if necessary.
4. Inspect all battery wiring. Repair or replace if necessary.
5. Attach the battery cables and tighten the cable clamps.

IMPORTANT: Do not apply petroleum jelly or marine grade grease before connecting and tightening clamps.

6. Apply petroleum jelly or marine grade grease on posts and clamps to eliminate air pockets and corrosion build up.
7. Coat the hull drain plug threads with petroleum jelly and reinstall.
8. Clean the bilge area.
9. Reinstall the exhaust drain plug.
10. Inspect all exhaust connections for carbon monoxide (CO) leakage. Adjust and repair as required.
11. Test the navigational lights and all other lighting on board.
12. Inspect all wiring for fraying, wear, loose connections, and other damage.
13. Inspect all switches, controls, and other related equipment for proper operation.
14. Inspect all safety equipment for proper operation and physical condition.

NOTE: After cleaning, make sure everything is thoroughly dry and air can circulate freely throughout the inside of the boat. Failure to dry boat's interior before storage may cause damage to the interior that is not covered under the boat's warranty.

8. If you store your boat outside, we recommend that you do not store with the canvas and bow set on. Cover with a storage cover, tarp or plastic (available from Larson Dealers)-especially if you live in an area of heavy snow. Whatever material you use for a cover, be sure the boat is properly ventilated.

LARSON Better Built Boats. NAUTICAL TERMINOLOGY 7

ABYC	American Boat and Yacht Council, Inc., the organization that sets voluntary safety and construction standards for small craft in the USA.	Bail (Bale)	To remove water from a boat by pump or bailer.
Aboard	On, in, or into a boat.	Aye	Yes, while aboard a boat or ship. Means "I understand."
Abeam	Amidships, at a right angle to the keel.	Aweigh	Off the bottom, said of an anchor.
Abaft	Toward the stern.	Athwart	Across.

LARSON Better Built Boats. NAUTICAL TERMINOLOGY 7

Abaft	Toward the stern.	Athwart	Across.
Abeam	Amidships, at a right angle to the keel.	Aweigh	Off the bottom, said of an anchor.
Aboard	On, in, or into a boat.	Aye	Yes, while aboard a boat or ship. Means "I understand."
ABYC	American Boat and Yacht Council, Inc., the organization that sets voluntary safety and construction standards for small craft in the USA.	Bail (Bale)	To remove water from a boat by pump or bailer.
Adrift	Without motive power and without anchor or mooring.	Ballast	Heavy material such as iron, lead, or stone placed in the bottom of the vessel.
Afloat	On the water.	Beacon	A post or buoy placed over a shoal or bank to warn vessels, also a signal mark on land.
Aft	Describing the after section of a vessel, or things to the rear of amidships and near the stern.	Beam	Imaginary line amidships at right angles to keel of vessel. Also vessel's width amidships.
Aground	Touching bottom.	Bearing	The direction or point of the compass in which an object is seen.
Amidships	In the center, the center portion of a vessel.	Belay	To make fast to a cleat or belaying pin; to cancel an order.
Anchor	A forging or casting shaped to grip the sea bottom and, by means of a cable or rope, hold a boat in a desired position.	Below	Beneath, or under, the deck. One goes below when going down into the cabin.
Anchorage	A customary, suitable and (usually) designated harbor area in which vessels may anchor.	Bend	To fasten by means of a bend or knot.
Astern	Toward the stern. An object that is aft of a boat is said to be astern of the boat.	Berth	A position, as a place to sleep or in which a vessel may be made fast; a margin of safety, as "a wide berth."

Bilge	The lower internal part of a boat's hull.
Bollard	A strong post for holding lines fast.
Bow	The forward part or front of the boat.
Breakers	Waves cresting as they reach shallow water, as at or on a beach.
Breakwater	A structure, usually stone or concrete, built to create a harbor or improve an existing one.
Bulkhead	Vertical partition in a boat.
Burdened Vessel	Former term for the vessel which must stay clear of vessels with the right-of-way.
Calking (Caulking)	Forcing filler material into the seams of the planks in a boat's deck or sides, to make them watertight.
Camber	The arch of a deck, sloping downward from the center toward the sides.
Capsize	To turn over.
Carburetor Backfire Flame Arrestor	Required equipment on all motorboats except outboards and diesels. Reduces chance of fire caused by backfires in internal combustion engines.
Cardinal Points	The four main points of a compass; north, east, south, and west.
Ceiling	The inside lining of the hull.

Certificate	Government paper, such as a boat's license.
Chart	A map of a body of water that contains piloting information.
Chine	The intersection of sides and bottom of a boat.
Cleat	A piece of wood or metal with projecting ends to which lines are made fast.
Clinker	A method of planking in which the lower edge of each strake overlaps the upper edge of the strake next below. (Also called lapstrake.)
Coaming	A raised edge, as around part or all of a cockpit, that prevents seawater from entering the boat.
Coast Guard	The federal marine law enforcement and rescue agency in the US.
Cockpit	A well or sunken space in the afterdeck of a small boat for the use of the helmsman and crew.
Companionway	A hatch or entrance, from deck to cabin.
Compass	The instrument which shows the heading of a vessel.
Cowls	Hooded openings used for ventilation.
Cradle	A frame used to support a vessel on land.

Give-Way Vessel	The one which must stay clear of vessels which have the right-of-way.
Grab Rail	A convenient grip, on a cabin top or along a companion ladder.
Gunwale	The upper edge of a boat's side. (pronounced gunnel.)
Harbor	A safe anchorage, protected from most storms; may be natural or man-made, with breakwaters and jetties; a place for docking and loading.
Hatch	An opening in a boat's deck for persons or cargo to go below.
Head	A marine toilet.
Headway	Forward motion of a vessel through the water.
Helm	The wheel or tiller by which a ship is steered.
Holding Tank	Storage tank for sewage, so that it will not be pumped overboard into the water.
Hull	The body of a boat.
Hypothermia	A physical condition where the body loses heat faster than it can produce it.
Inboard	More toward the center of a vessel; inside; a motor fitted inside the boat.

Inland Rules	Rules of the road that apply to vessel operation in harbors and certain rivers, lakes, and inland waterways.
Intracoastal Waterways	(ICWs): bays, rivers and canals along the coasts (such as Atlantic and Gulf of Mexico coasts), connected so that vessels may travel without going into the open sea.
Jetty	A structure, usually masonry, projecting out from the shore; a jetty may protect a harbor entrance.
Keel	The permanently positioned, fore and aft backbone member of a boat's hull.
Knot	To bend a line. Also, a unit of speed equal to one nautical mile (6,076.10 feet) an hour.
Launch	(1) To put a vessel into the water; (2) a small open powerboat, mainly used for transportation between a vessel and shore.
Lee	The side opposite to that from which the wind blows.
Leeward	Situated on the side turned away from the wind. (Opposite of windward.)
Leeway	The amount a boat is carried sideways by the wind's force or current.
Limber Holes	Drainage holes in the bilge timbers of a vessel, allowing water to run to a low point for pumping out.

<p>Navigation The art of conducting a ship from port to port.</p> <p>Nautical Mile 6076.12 feet, or 1852 meters, an international standard; the geographical mile, the length of one minute of latitude at the equator, is 6087.20 feet.</p> <p>Nun Buoy A conical, red buoy bearing an even number and marking the starboard side of a channel from seaward.</p>	<p>List (1) A continuous leaning to one side, often caused by an imbalance in stowage or a leak into one compartment; (2) A light list is a printed listing of aids to navigation, in geographical order, or inclining of a vessel toward the side.</p> <p>LOA Length overall; the maximum length of a vessel's hull, excluding projecting spars or rudder.</p>	<p>Locker A storage place, a closet.</p> <p>Oar A long, wooden instrument with a flat blade at one end, used for propelling a boat.</p>
<p>Locker A storage place, a closet.</p> <p>Log A record or diary of a vessel's journey.</p> <p>Lubber's Line A mark or permanent line on a compass that shows the course of the boat.</p> <p>Making Way Making progress through the water.</p> <p>Marina A place, essentially a dock area, where small recreational craft are kept; usually floats or piers, as well as service facilities, are available.</p> <p>MAYDAY A radio distress call, from the French m'aidez (help me); SOS in Morse Code.</p> <p>Mooring Commonly, the anchor chain, buoy, pennant, etc., by which a boat is permanently anchored in one location.</p> <p>Motor A source of mechanical power.</p> <p>Motorboat Any watercraft 65 feet or less in length propelled by machinery, whether or not such machinery is the principal source of propulsion.</p>	<p>Navigation The art of conducting a ship from port to port.</p> <p>Nautical Mile 6076.12 feet, or 1852 meters, an international standard; the geographical mile, the length of one minute of latitude at the equator, is 6087.20 feet.</p> <p>Nun Buoy A conical, red buoy bearing an even number and marking the starboard side of a channel from seaward.</p> <p>Oar A long, wooden instrument with a flat blade at one end, used for propelling a boat.</p> <p>Outboard (1) a propulsion unit for boats, attached at the transom; includes motor, drive shaft, and propeller; fuel tank and battery may be integral or installed separately in the boat; (2) outside or away from a vessel's hull; opposite of inboard.</p> <p>Outdrive A propulsion system for boats, with an inboard motor operating an exterior drive, with drive shaft, gears, and propeller; also called stern-drive and inboard/outboard.</p> <p>Overall Length The extreme length of a vessel, excluding spars or rigging fittings. See LOA.</p> <p>Painter A rope attached to the bow of a boat for making it fast.</p> <p>PFD Personal Flotation Device.</p>	<p>Locker A storage place, a closet.</p> <p>Oar A long, wooden instrument with a flat blade at one end, used for propelling a boat.</p>

Pier	A structure, usually wood or masonry, extending into the water, used as a landing place for boats and ships.	Scope	The length of the anchor rope or chain. 6 to 1 scope means that the length of the anchor rope from the boat to the anchor is 6 times the depth of the water.
Pile	A vertical wooden or concrete pole, driven into the bottom; may be a support for a pier or floats; also used for mooring.	Scupper	A hole allowing water to run off the deck.
Piling	A structure of piles.	Sea Anchor	A floating canvas cone, held open by wire rings, with an opening in the smaller end, and a rope bridle at the larger end attached to a line leading to the vessel; used in storm conditions to (a) keep the bow of the boat to the wind, and (b) slow downwind drift of the boat.
Pitch	(1) The up and down movement as the bow and stern rise and fall due to wave action; (2) The theoretical distance advanced by a propeller in one revolution.	Seacock	A thru-hull valve, a shut-off on a plumbing or drain pipe between the vessel's interior and the sea.
Planing Hull	Type of hull that is shaped to lift out of the water at high speed and ride on the surface.	Slip	(1) a berth for a boat between two piers or floats; (2) The percentage difference between the theoretical and the actual distance that a propeller advances when turning in water under load.
Port	The left side of a boat when you are facing the bow, also a destination or harbor.	Sole	The cabin or cockpit floor.
Privileged Vessel	Former term for the vessel with the right-of-way.	Spar Buoy	A channel marker that looks like a tall, slender pole.
Propeller	Wheel or screw. Mechanism that pushes water aft to propel the boat.	Stand-On Vessel	The vessel with the right-of-way.
Rigging	The general term for all lines(ropes) of a vessel.	Starboard	The right side of a boat when you are facing the bow.
Roll	The sideward motion of a boat caused by wind or waves.	Stern	The after end or back of the boat.
Rules of the Road	The nautical traffic rules for preventing collisions on the water.		

7.6

The length of the anchor rope or chain. 6 to 1 scope means that the length of the anchor rope from the boat to the anchor is 6 times the depth of the water.

A hole allowing water to run off the deck.

A floating canvas cone, held open by wire rings, with an opening in the smaller end, and a rope bridle at the larger end attached to a line leading to the vessel. Used in storm conditions to (a) keep the bow of the boat to the wind, and (b) slow downwind drift of the boat.

Sea Anchor

Scupper

Scope

A structure, usually wood or masonry, extending into the water, used as a landing place for boats and ships.

A vertical wooden or concrete pole, driven into the bottom; may be a support for a pier or floats; also used for mooring.

A structure of piles.

(1) The up and down movement as the bow and stern rise and fall due to wave action. (2) The theoretical distance advanced by a propeller in one revolution.

Pier

Pile

Piling

Pitch

Stow	To store items neatly and securely.	Vessel	Every kind of watercraft, other than a seaplane on the water, capable of being used as a means of transportation on water.
Strake	Planks running fore and aft on the outside of a vessel.	VHF Radio	A Very High Frequency electronic communications and direction finding system.
Taffrail	The rail around a boat's stern.	Wake	Moving waves, created by vessel motion. Track or path that a boat leaves behind it, when moving across the water.
Tide	The alternate rise and fall of waters caused by the gravitational attraction of moon or sun.	Waterline	The intersection of a vessel's hull and the water's surface; the line separating the bottom paint and the topsides.
Topsides	(1) The sides of a vessel above the waterline; (2) On deck as opposed to below deck.	Way	Movement of a vessel through the water. Technically it is underway when not at anchor, aground, or made fast to the shore. The common usage is interpreted as progress through the water. Headway when going forward and sternway when it is going backwards.

Stow	To store items neatly and securely.	Vessel	Every kind of watercraft, other than a seaplane on the water, capable of being used as a means of transportation on water.
Strake	Planks running fore and aft on the outside of a vessel.	VHF Radio	A Very High Frequency electronic communications and direction finding system.
Taffrail	The rail around a boat's stern.	Wake	Moving waves, created by vessel motion. Track or path that a boat leaves behind it, when moving across the water.
Tide	The alternate rise and fall of waters caused by the gravitational attraction of moon or sun.	Wash	The loose or broken water left behind a vessel as it moves along; the surging action of waves.
Topsides	(1) The sides of a vessel above the waterline; (2) On deck as opposed to below deck.	Waterline	The intersection of a vessel's hull and the water's surface; the line separating the bottom paint and the topsides.
Transom	The transverse planking which forms the after end of a small, square-ended boat. (Outboard motors are usually attached to a transom.)	Way	Movement of a vessel through the water. Technically it is underway when not at anchor, aground, or made fast to the shore. The common usage is interpreted as progress through the water. Headway when going forward and sternway when it is going backwards.
Trim	To arrange weights in a vessel in such a manner as to obtain desired draft at bow and stern.	Well	Area at the rear of a boat where the motor may be located.
Trimaran	Boat with three hulls, the center one is the largest.	Wharf	A structure, parallel to the shore, for docking vessels.
Unbend	To cast-off or untie.	Wheel	(1) The steering wheel; (2) the propeller.
Underway	Vessel in motion, i.e., when not moored, at anchor or aground.		
USPS	United States Power Squadron, a private membership organization that specializes in boating education and good boating practices.		

Yaw To swing or steer off course, as when running with a quartering sea.

Windward Situated on the side closest to the wind. (Opposite of leeward.)

Whistle Signal A standard communication signal between boats, to indicate change of course, danger, or other situations.

Whistle Signal A standard communication signal between boats, to indicate change of course, danger, or other situations.

Windward Situated on the side closest to the wind. (Opposite of leeward.)

Yaw To swing or steer off course, as when running with a quartering sea.