



2020 MODELS
FULL SPECIFICATIONS





DEEP V TOP DECKS

Trophy 4-5
 T-Pro 6-7
 Edge 6-7

DEEP V DUAL CONSOLES

Competitor 8-9
 Voyageur 8-9
 Classic 8-9

DEEP V SIDE CONSOLES

Competitor 10-11
 Voyageur 12-13
 Classic 12-13
 Escape 12-13

DEEP V TILLERS

Competitor 14-15
 Voyageur 16-17
 Classic 16-17
 Escape 16-17
 Summit 16-17

BAY, BASS & CRAPPIES

Bay Boats 18-19
 Pro Series 18-19
 Prowler 20-21
 Crappie DLX 20-21

MOD V ALL WELDS

MV Center Console 22-23
 MV Side Console 24-25
 MV Tiller 26-27
 Waterfowler 28-29

UTILITY BOATS

V 16 & V 14 30

JON BOATS

Rivited Jons 31



	Trophy 205	Trophy 195	Trophy 185	Trophy 175	
SPECIFICATIONS	Length	20' 8" (6.3 m)	19' 8" (6.0 m)	18' 8" (5.7 m)	17' 8" (5.4 m)
	Beam	98" (2.49 m)	98" (2.49 m)	98" (2.49 m)	94" (2.38 m)
	Max. Power	300 HP (224 kW)	200 HP (149 kW)	175 HP (130 kW)	150 HP (112 kW)
	Transom Width	96" (2.44 m)	96" (2.44 m)	96" (2.44 m)	94" (2.38 m)
	Transom Height	25" (64 m)	25" (64 m)	25" (64 m)	25" (64 m)
	Max. Depth to Keel	47" (1.2 m)	47" (1.2 m)	47" (1.2 m)	43" (1.1 m)
	Max. Depth to Floor	27" (69 m)	27" (69 m)	25" (64 m)	25" (64 m)
	Max. Hull Thickness	0.200" (5.1 mm)	0.200" (5.1 mm)	0.200" (5.1 mm)	0.160" (4.1 mm)
	Freeboard Thickness	0.080" (2.0 mm)	0.080" (2.0 mm)	0.080" (2.0 mm)	0.080" (2.0 mm)
	Boat Dry Weight	1,915 lbs. (869 kg)	1,805 lbs. (819 kg)	1,780 lbs. (807 kg)	1,550 lbs. (703 kg)
	Max. Persons	9	8	8	7
	Max. Weight Capacity	2,350 lbs. (1,066 kg)	2,000 lbs. (907 kg)	1,800 lbs. (816 kg)	1,700 lbs. (771 kg)
	Fuel Capacity	45 gal. (170 l)	34 gal. (129 l)	34 gal. (129 l)	34 gal. (129 l)
	ROD STORAGE	Lockable Rod Storage	standard	standard	standard
Port Rod Storage		(5) 10'	(5) 8'	(5) 7'	(5) 7'
Starboard Rod Storage		NA	NA	NA	NA
Bow Rod Storage		(4) 8' (4) 7' 6" *	(4) 8' (4) 7' 6" *	(4) 8' (4) 7' 6" *	(8) 7' 6" *
LED-Lighted Rod Locker		standard	standard	standard	NA
LIVEWELLS	Aft Livewell Capacity	18 gal. (68 l)	18 gal. (68 l)	18 gal. (68 l)	18 gal. (68 l)
	Bow Livewell Capacity	18 gal. (68 l)	18 gal. (68 l)	18 gal. (68 l)	18 gal. (68 l)
	Aerated with Timer	standard	standard	standard	standard
	LED-Lighted Livewell	standard	standard	standard	standard

		Trophy 205	Trophy 195	Trophy 185	Trophy 175
SEATING	Driver Seat Slider	standard	standard	standard	standard
	Air-Ride Pedestal	standard [4]	standard [3]	standard [3]	standard [3]
	Captain's Chair	optional	optional	optional	optional
	Premium Seat	standard [4]	standard [3]	standard [3]	standard [3]
	Deluxe Seat	NA	NA	NA	NA
	Pro Casting Seat	optional	optional	optional	optional
	Jump Seats	standard	standard	standard	standard
	Rear Flip Bench Seat	NA	NA	NA	NA
	Bow Cushions	optional	optional	optional	optional
	Console Back Cushions	standard	standard	standard	standard
Combing Pads	optional	optional	optional	optional	
STORAGE	Forward Cubby Storage	standard	standard	standard	standard
	Bow Dry Storage	NA	NA	NA	NA
	Bow Platform Storage	3	3	3	3
	Cockpit Floor Storage	NA	NA	NA	NA
	Lockable Glove Box	standard	standard	standard	standard
ELECTRONICS	Speedo/Fuel/Tach/Volt	standard	standard	standard	standard
	USB Port	standard	standard	standard	standard
	Horn	standard	standard	standard	standard
	Bluetooth Radio	standard	standard	standard	standard
	12/24 Volt Trolling System	standard	standard	standard	standard
	36 Volt Trolling System	optional	optional	optional	NA
	Interior Courtesy Lights	standard	standard	standard	standard
STEERING	Tilt Helm	standard	standard	standard	standard
	Hydraulic Steering	standard	standard	standard	optional
	No-Feedback Steering	NA	NA	NA	standard
CONVENIENCE	Built-in Toe Holds	standard	standard	standard	NA
	Cleats	fold down	fold down	fold down	fold down
	AlumaTrac™ Rail System	standard	standard	standard	standard
	Boarding Ladder	standard	standard	standard	standard
	Grab Handles	standard	standard	standard	standard
	Ski Pylon	optional	optional	optional	NA
	Aft Casting Deck Extension	NA	NA	NA	NA
CANVAS	Travel Cover	optional	optional	optional	optional
	High-Rise Bimini Top	optional	optional	optional	optional
	Enclosure Curtains	optional	optional	optional	optional
	Bow Cover	optional	optional	optional	optional

Aumacraft is not responsible for typographical errors. Specifications, options and standard features are subject to change without notice. For more information and photos of additional models, visit www.aumacraft.com.



	T-Pro 195	T-Pro 185	Edge 185 Sport	Edge 175 Sport	
SPECIFICATIONS	Length	19' 3" (5.9 m)	18' 3" (5.6 m)	18' 9" (5.71 m)	17' 8" (5.4 m)
	Beam	97" (2.47 m)	97" (2.47 m)	95" (2.41 m)	95" (2.41 m)
	Max. Power	200 HP (149 kW)	175 HP (130 kW)	175 HP (130 kW)	150 HP (112 kW)
	Transom Width	96" (2.44 m)	96" (2.44 m)	95" (2.41 m)	95" (2.41 m)
	Transom Height	25" (64 m)	25" (64 m)	25" (64 m)	25" (64 m)
	Max. Depth to Keel	43" (1.1 m)	43" (1.1 m)	45" (1.14 m)	45" (1.14 m)
	Max. Depth to Floor	25" (64 m)	25" (64 m)	25" (64 m)	25" (64 m)
	Max. Hull Thickness	0.200" (5.1 mm)	0.200" (5.1 mm)	0.160" (4.1 mm)	0.160" (4.1 mm)
	Freeboard Thickness	0.080" (2.0 mm)	0.080" (2.0 mm)	0.080" (2.0 mm)	0.080" (2.0 mm)
	Boat Dry Weight	1,735 lbs. (787 kg)	1,680 lbs. (762 kg)	1,579 lbs. (716 kg)	1,488 lbs. (667 kg)
	Max. Persons	6	6	8	7
	Max. Weight Capacity	1,900 lbs. (862 kg)	1,600 lbs. (762 kg)	1,990 lbs. (903 kg)	1,820 lbs. (826 kg)
	Fuel Capacity	34 gal. (129 l)	34 gal. (129 l)	34 gal. (129 l)	34 gal. (129 l)
	ROD STORAGE	Lockable Rod Storage	standard	standard	standard
Port Rod Storage		{5} 9'	{5} 8'	7'	6' 6"
Starboard Rod Storage		NA	NA	NA	NA
Bow Rod Storage		{8} 8'	{8} 8'	{8} 8'	{8} 8'
LED-Lighted Rod Locker	standard bow	standard bow	NA	NA	
LIVEWELLS	Aft Livewell Capacity	18 gal. (68 l)	18 gal. (68 l)	18 gal. (68 l)	18 gal. (68 l)
	Bow Livewell Capacity	18 gal. (68 l)	18 gal. (68 l)	NA	NA
	Aerated with Timer	standard	standard	standard	standard
	LED-Lighted Livewell	standard	standard	standard	standard

	T-Pro 195	T-Pro 185	Edge 185 Sport	Edge 175 Sport	
SEATING	Driver Seat Slider	standard	standard	standard	standard
	Air-Ride Pedestal	standard [3]	standard [3]	standard (driver)	standard (driver)
	Captain's Chair	optional	optional	optional	optional
	Premium Seat	standard [3]	standard [3]	standard [3]	standard [3]
	Deluxe Seat	NA	NA	NA	NA
	Pro Casting Seat	optional	optional	optional	optional
	Jump Seats	NA	NA	standard	standard
	Rear Flip Bench Seat	optional	optional	NA	NA
	Bow Cushions	NA	NA	optional	optional
	Console Back Cushions	NA	NA	standard	standard
Combing Pads	NA	NA	NA	NA	
STORAGE	Forward Cubby Storage	standard	standard	standard	standard
	Bow Dry Storage	standard	standard	NA	NA
	Bow Platform Storage	2	2	2	2
	Cockpit Floor Storage	standard	NA	NA	NA
	Lockable Glove Box	standard	standard	standard	standard
ELECTRONICS	Speedo/Fuel/Tach/Volt	standard	standard	standard	standard
	USB Port	standard	standard	standard	standard
	Horn	standard	standard	standard	standard
	Bluetooth Radio	standard	standard	standard	standard
	12/24 Volt Trolling System	standard	standard	standard	standard
	36 Volt Trolling System	standard	standard	optional	optional
	Interior Courtesy Lights	standard	standard	standard	standard
STEERING	Tilt Helm	standard	standard	standard	standard
	Hydraulic Steering	standard	standard	standard	optional
	No-Feedback Steering	NA	NA	NA	standard
CONVENIENCE	Built-in Toe Holds	standard	standard	NA	NA
	Cleats	fold down	fold down	fold down	fold down
	AlumaTrac™ Rail System	standard	standard	standard	standard
	Boarding Ladder	standard	standard	standard	standard
	Grab Handles	standard	standard	standard	standard
	Ski Pylon	NA	NA	optional	optional
	Aft Casting Deck Extension	optional	optional	NA	NA
CANVAS	Travel Cover	optional	optional	optional	optional
	High-Rise Bimini Top	optional (Sport)	optional (Sport)	optional	optional
	Enclosure Curtains	optional (Sport)	optional (Sport)	optional	optional
	Bow Cover	optional (Sport)	optional (Sport)	optional	optional

Aumacraft is not responsible for typographical errors. Specifications, options and standard features are subject to change without notice. For more information and photos of additional models, visit www.aumacraft.com.



	Competitor 205 Sport	Competitor 185 Sport	Competitor 175 Sport	Comp 165 Sport	Voyageur 175 Sport	Classic 165 Sport	
SPECIFICATIONS	Length	20' 6" (6.25 m)	18' 8" (5.7 m)	17' 8" (5.4 m)	16' 7" (5.1 m)	17' 10" (5.5 m)	16' 4" (4.98 m)
	Beam	96" (2.44 m)	95" (2.41 m)	95" (2.41 m)	87" (2.21 m)	87" (2.21 m)	82" (2.1 m)
	Max. Power	250 HP (186 kW)	175 HP (130 kW)	150 HP (112 kW)	90 HP (67 kW)	125 HP (94 kW)	90 HP (67 kW)
	Transom Width	95" (2.41 m)	93" (2.36 m)	93" (2.36 m)	87" (2.21 m)	87" (2.21 m)	82" (2.1 m)
	Transom Height	25" (64 m)	25" (64 m)	25" (64 m)	20" (51 m)	20" (51 m)	20" (51 m)
	Max. Depth to Keel	45" (1.14 m)	43" (1.1 m)	43" (1.1 m)	35" (.89 mm)	35" (.89 mm)	35" (.89 mm)
	Max. Depth to Floor	25" (64 m)	25" (64 m)	25" (64 m)	23" (58 m)	20" (51 m)	20" (51 m)
	Max. Hull Thickness	0.200" (5.1 mm)	0.160" (4.1 mm)	0.160" (4.1 mm)	0.145" (3.7 mm)	0.145" (3.7 mm)	0.145" (3.7 mm)
	Freeboard Thickness	0.080" (2.0 mm)	0.080" (2.0 mm)	0.080" (2.0 mm)	0.065" (1.7 mm)	0.065" (1.7 mm)	0.065" (1.7 mm)
	Boat Dry Weight	1,710 lbs. (776 kg)	1,500 lbs. (680 kg)	1,375 lbs. (624 kg)	1,040 lbs. (472 kg)	1,070 lbs. (485 kg)	955 lbs. (433 kg)
	Max. Persons	8	6	6	6	6	5
	Max. Weight Capacity	2,450 lbs. (1,111 kg)	1,600 lbs. (726 kg)	1,500 lbs. (680 kg)	1,380 lbs. (626 kg)	1,480 lbs. (671 kg)	1,300 lbs. (590 kg)
	Fuel Capacity	45 gal. (170 l)	34 gal. (129 l)	34 gal. (129 l)	17 gal. (64 l)	17 gal. (64 l)	17 gal. (64 l)
	ROD STORAGE	Lockable Rod Storage	standard	standard	standard	standard	standard
Port Rod Storage		10'	(5) 8'	NA	NA	8'	7'
Starboard Rod Storage		NA	NA	(5) 8'	(5) 8'	8'	7'
Bow Rod Storage		(4) 9' (4) 8' 6"	(4) 8' (4) 7' 6"	(4) 8' (4) 7' 6"	(4) 8'	(8) 7' 6"	NA
LED-Lighted Rod Locker		NA	NA	NA	NA	NA	NA
LIVEWELLS	Aft Livewell Capacity	33 gal. (125 l)	18 gal. (68 l)	18 gal. (68 l)	18 gal. (68 l)	18 gal. (68 l)	NA
	Bow Livewell Capacity	22 gal. (88 l)	13 gal. (49 l)	13 gal. (49 l)	NA	NA	34 gal. (129 l)
	Aerated with Timer	standard	standard	standard	standard	standard	standard
	LED-Lighted Livewell	standard	standard	standard	standard	standard	standard

		Competitor 205 Sport	Competitor 185 Sport	Competitor 175 Sport	Comp 165 Sport	Voyageur 175 Sport	Classic 165 Sport
SEATING	Driver Seat Slider	standard	standard	standard	standard	standard	standard
	Air-Ride Pedestal	standard (driver)	standard (driver)	optional	optional	optional	optional
	Captain's Chair	optional	optional	optional	NA	NA	NA
	Premium Seat	standard (3)	standard (3)	standard (3)	standard (3)	standard (3)	optional
	Deluxe Seat	NA	NA	NA	NA	NA	standard (3)
	Pro Casting Seat	optional	optional	optional	optional	optional	optional
	Jump Seats	NA	NA	NA	NA	NA	NA
	Rear Flip Bench Seat	optional	optional	optional	optional	optional	optional
	Bow Cushions	NA	NA	NA	NA	NA	NA
	Console Back Cushions	standard (NA)	standard	standard	NA	NA	NA
Combing Pads	NA	NA	NA	NA	NA	NA	
STORAGE	Forward Cubby Storage	standard	standard	standard	standard	standard	standard
	Bow Dry Storage	standard	NA	NA	NA	NA	NA
	Bow Platform Storage	3	3	3	2	4	2
	Cockpit Floor Storage	standard	NA	NA	standard	standard	NA
	Lockable Glove Box	standard (Sport)	standard	standard	standard	standard	standard
ELECTRONICS	Speedo/Fuel/Tach/Volt	standard	standard	standard	standard	standard	standard
	USB Port	standard	standard	standard	standard	optional	NA
	Horn	standard	standard	standard	standard	standard	standard
	Bluetooth Radio	standard	standard	standard	standard	optional	NA
	12/24 Volt Trolling System	standard	standard	standard	standard	standard	standard
	36 Volt Trolling System	standard	optional	optional	NA	NA	NA
	Interior Courtesy Lights	standard	standard	standard	standard	standard	standard
STEERING	Tilt Helm	standard	standard	standard	NA	NA	NA
	Hydraulic Steering	standard	standard	optional	NA	NA	NA
	No-Feedback Steering	NA	NA	standard	standard	standard	standard
CONVENIENCE	Built-in Toe Holds	NA	NA	NA	NA	NA	NA
	Cleats	fold down	fold down	fold down	fixed	fixed	Fixed
	AlumaTrac™ Rail System	standard	standard	standard	standard	standard	standard
	Boarding Ladder	standard	standard	standard	optional	optional	optional
	Grab Handles	standard	standard	standard	standard	standard	standard
	Ski Pylon	NA	NA	NA	NA	NA	NA
CANVAS	Aft Casting Deck Extension	optional	optional	optional	optional	optional	optional
	Travel Cover	optional	optional	optional	optional	optional	optional
	High-Rise Bimini Top	optional (Sport)	optional	optional	optional	optional	optional
	Enclosure Curtains	optional (Sport)	optional	optional	optional	optional	optional
Bow Cover	optional (Sport)	optional	optional	optional	optional	optional	

Aiumarcraft is not responsible for typographical errors. Specifications, options and standard features are subject to change without notice. For more information and photos of additional models, visit www.aiumarcraft.com.



	Competitor 205 CS	Competitor 185 CS	Competitor 175 CS	Competitor 165 CS	
SPECIFICATIONS	Length	20' 6" [6.25 m]	18' 8" [5.7 m]	17' 8" [5.4 m]	16' 7" [5.1 m]
	Beam	96" [2.44 m]	95" [2.41 m]	95" [2.41 m]	87" [2.21 m]
	Max. Power	250 HP [186 kW]	175 HP [130 kW]	150 HP [112 kW]	90 HP [67 kW]
	Transom Width	95" [2.41 m]	93" [2.36 m]	93" [2.36 m]	87" [2.21 m]
	Transom Height	25" [64 m]	25" [64 m]	25" [64 m]	20" [51 m]
	Max. Depth to Keel	45" [1.14 m]	43" [1.1 m]	43" [1.1 m]	35" [89 mm]
	Max. Depth to Floor	25" [64 m]	25" [64 m]	25" [64 m]	23" [58 m]
	Max. Hull Thickness	0.200" [5.1 mm]	0.160" [4.1 mm]	0.160" [4.1 mm]	0.145" [3.7 mm]
	Freeboard Thickness	0.080" [2.0 mm]	0.080" [2.0 mm]	0.080" [2.0 mm]	0.065" [1.7 mm]
	Boat Dry Weight	1,710 lbs. [776 kg]	1,410 lbs. [640 kg]	1,285 lbs. [583 kg]	980 lbs. [445 kg]
	Max. Persons	8	6	6	6
	Max. Weight Capacity	2,450 lbs. [1,111 kg]	1,600 lbs. [726 kg]	1,500 lbs. [680 kg]	1,380 lbs. [626 kg]
	Fuel Capacity	45 gal. [170 l]	34 gal. [129 l]	34 gal. [129 l]	17 gal. [64 l]
	ROD STORAGE	Lockable Rod Storage	standard	standard	standard
Port Rod Storage		10'	(5) 8'	NA	(4) 8'
Starboard Rod Storage		NA	NA	(5) 8'	NA
Bow Rod Storage		(4) 9' (4) 8' 6"	(4) 8' (4) 7' 6"	(4) 7' (4) 6' 6"	(4) 7' (4) 6' 6"
LED-Lighted Rod Locker	NA	NA	NA	NA	
LIVEWELLS	Aft Livewell Capacity	33 gal. [125 l]	18 gal. [68 l]	18 gal. [68 l]	18 gal. [68 l]
	Bow Livewell Capacity	22 gal. [88 l]	13 gal. [49 l]	13 gal. [49 l]	NA
	Aerated with Timer	standard	standard	standard	standard
	LED-Lighted Livewell	standard	standard	standard	standard

	Competitor 205 CS	Competitor 185 CS	Competitor 175 CS	Competitor 165 CS
SEATING	Driver Seat Slider	standard	standard	standard
	Air-Ride Pedestal	standard (driver)	standard (driver)	optional
	Captain's Chair	optional	optional	optional
	Premium Seat	standard (3)	standard (3)	standard (3)
	Deluxe Seat	NA	NA	NA
	Pro Casting Seat	optional	optional	optional
	Jump Seats	NA	NA	NA
	Rear Flip Bench Seat	optional	optional	optional
	Bow Cushions	NA	NA	NA
	Console Back Cushions	standard (NA)	NA	NA
Combing Pads	NA	NA	NA	
STORAGE	Forward Cubby Storage	standard	standard	standard
	Bow Dry Storage	standard	NA	NA
	Bow Platform Storage	3	3	3
	Cockpit Floor Storage	standard	NA	NA
	Lockable Glove Box	standard (Sport)	NA	NA
ELECTRONICS	Speedo/Fuel/Tach/Volt	standard	standard	standard
	USB Port	standard	standard	standard
	Horn	standard	standard	standard
	Bluetooth Radio	standard	standard	standard
	12/24 Volt Trolling System	standard	standard	standard
	36 Volt Trolling System	standard	optional	optional
	Interior Courtesy Lights	standard	standard	standard
STEERING	Tilt Helm	standard	standard	standard
	Hydraulic Steering	standard	standard	optional
	No-Feedback Steering	NA	NA	standard
CONVENIENCE	Built-in Toe Holds	NA	NA	NA
	Cleats	fold down	fold down	fold down
	AlumaTrac™ Rail System	standard	standard	standard
	Boarding Ladder	standard	standard	standard
	Grab Handles	standard	standard	standard
	Ski Pylon	NA	NA	NA
CANVAS	Aft Casting Deck Extension	optional	optional	optional
	Travel Cover	optional	optional	optional
	High-Rise Bimini Top	optional (Sport)	NA	NA
	Enclosure Curtains	optional (Sport)	NA	NA
Bow Cover	optional (Sport)	NA	NA	

Aumacraft is not responsible for typographical errors. Specifications, options and standard features are subject to change without notice. For more information and photos of additional models, visit www.aumacraft.com.



Voyager 175 CS

Classic 165 CS

Escape 165 CS

Escape 145 CS

	Voyager 175 CS	Classic 165 CS	Escape 165 CS	Escape 145 CS	
SPECIFICATIONS	Length	17' 10" [5.5 m]	16' 4" [4.98 m]	16' 6" [5.0 m]	14' 6" [4.4 m]
	Beam	87" [2.21 m]	82" [2.1 m]	76" [1.9 m]	76" [1.9 m]
	Max. Power	125 HP [94 kW]	75 HP [56 kW]	50 HP [37 kW]	40 HP [30 kW]
	Transom Width	87" [2.21 m]	82" [2.1 m]	76" [1.9 m]	76" [1.9 m]
	Transom Height	20" [51 m]	20" [51 m]	20" [51 m]	20" [51 m]
	Max. Depth to Keel	35" [89 mm]	35" [89 mm]	36" [91 mm]	32" [81 mm]
	Max. Depth to Floor	20" [51 m]	20" [51 m]	20" [51 m]	20" [51 m]
	Max. Hull Thickness	0.145" [3.7 mm]	0.145" [3.7 mm]	0.145" [3.7 mm]	0.145" [3.7 mm]
	Freeboard Thickness	0.065" [1.7 mm]	0.065" [1.7 mm]	0.065" [1.7 mm]	0.065" [1.7 mm]
	Boat Dry Weight	1,010 lbs. [458 kg]	895 lbs. [406 kg]	696 lbs. [316 kg]	604 lbs. [274 kg]
	Max. Persons	6	5	5	4
	Max. Weight Capacity	1,480 lbs. [671 kg]	1,280 lbs. [581 kg]	1,250 lbs. [567 kg]	1,040 lbs. [472 kg]
	Fuel Capacity	17 gal. [64 l]	17 gal. [64 l]	portable	portable
	ROD STORAGE	Lockable Rod Storage	standard	standard	standard
Port Rod Storage		8'	7'	8'	7'
Starboard Rod Storage		8'	7'	NA	NA
Bow Rod Storage		[8] 7' 6"	NA	NA	NA
LED-Lighted Rod Locker		NA	NA	NA	NA
LIVEWELLS	Aft Livewell Capacity	18 gal. [68 l]	NA	NA	NA
	Bow Livewell Capacity	NA	34 gal. [129 l]	18 gal. [68 l]	18 gal. [68 l]
	Aerated with Timer	standard	standard	standard	standard
	LED-Lighted Livewell	standard	standard	standard	standard

	Voyageur 175 CS	Classic 165 CS	Escape 165 CS	Escape 145 CS
SEATING	Driver Seat Slider	standard	standard	standard
	Air-Ride Pedestal	optional	optional	optional
	Captain's Chair	NA	NA	NA
	Premium Seat	standard [3]	optional	optional
	Deluxe Seat	NA	standard [3]	standard [2]
	Pro Casting Seat	optional	optional	optional
	Jump Seats	NA	NA	NA
	Rear Flip Bench Seat	optional	optional	NA
	Bow Cushions	NA	NA	NA
	Console Back Cushions	NA	NA	NA
Combing Pads	NA	NA	NA	
STORAGE	Forward Cubby Storage	standard	standard	standard
	Bow Dry Storage	NA	NA	NA
	Bow Platform Storage	4	2	2
	Cockpit Floor Storage	standard	NA	NA
	Lockable Glove Box	NA	NA	NA
ELECTRONICS	Speedo/Fuel/Tach/Volt	standard	standard	NA
	USB Port	optional	NA	NA
	Horn	standard	standard	NA
	Bluetooth Radio	optional	NA	NA
	12/24 Volt Trolling System	standard	standard	standard
	36 Volt Trolling System	NA	NA	NA
	Interior Courtesy Lights	standard	standard	NA
STEERING	Tilt Helm	NA	NA	NA
	Hydraulic Steering	NA	NA	NA
	No-Feedback Steering	standard	standard	standard
CONVENIENCE	Built-in Toe Holds	NA	NA	NA
	Cleats	fixed	Fixed	Fixed
	AlumaTrac™ Rail System	standard	standard	standard
	Boarding Ladder	optional	optional	optional
	Grab Handles	standard	standard	NA
	Ski Pylon	NA	NA	NA
CANVAS	Aft Casting Deck Extension	optional	optional	NA
	Travel Cover	optional	optional	optional
	High-Rise Bimini Top	NA	NA	NA
	Enclosure Curtains	NA	NA	NA
	Bow Cover	NA	NA	NA

AlumaCraft is not responsible for typographical errors. Specifications, options and standard features are subject to change without notice. For more information and photos of additional models, visit www.alumacraft.com.



	Competitor 205 Tiller	Competitor 185 Tiller	Comp 175 Tiller	Comp 165 Tiller	
SPECIFICATIONS	Length	20' 6" [6.25 m]	18' 8" [5.7 m]	17' 8" [5.4 m]	16' 7" [5.1 m]
	Beam	96" [2.44 m]	95" [2.41 m]	95" [2.41 m]	87" [2.21 m]
	Max. Power	200 HP [149 kW]	90 HP [67 kW]	90 HP [67 kW]	70 HP [52 kW]
	Transom Width	95" [2.41 m]	93" [2.36 m]	93" [2.36 m]	87" [2.21 m]
	Transom Height	25" [64 m]	25" [64 m]	20" [51 m]	20" [51 m]
	Max. Depth to Keel	45" [1.14 m]	43" [1.1 m]	43" [1.1 m]	35" [89 mm]
	Max. Depth to Floor	25" [64 m]	25" [64 m]	23" [58 m]	23" [58 m]
	Max. Hull Thickness	0.200" [5.1 mm]	0.160" [4.1 mm]	0.160" [4.1 mm]	0.145" [3.7 mm]
	Freeboard Thickness	0.080" [2.0 mm]	0.080" [2.0 mm]	0.080" [2.0 mm]	0.065" [1.7 mm]
	Boat Dry Weight	1,616 lbs. [733 kg]	1,300 lbs. [590 kg]	1,160 lbs. [526 kg]	920 lbs. [417 kg]
	Max. Persons	8	6	6	6
	Max. Weight Capacity	2,450 lbs. [1,111 kg]	1,600 lbs. [726 kg]	1,500 lbs. [680 kg]	1,380 lbs. [626 kg]
	Fuel Capacity	45 gal. [170 l]	34 gal. [129 l]	34 gal. [129 l]	17 gal. [64 l]
	ROD STORAGE	Lockable Rod Storage	standard	standard	standard
Port Rod Storage		10'	NA	NA	(4) 8'
Starboard Rod Storage		NA	(5) 8'	(5) 8'	NA
Bow Rod Storage		(4) 9' (4) 8' 6"	(4) 8' (4) 7' 6"	(4) 7' (4) 6' 6"	(4) 7' (4) 6' 6"
LED-Lighted Rod Locker		NA	NA	NA	NA
LIVEWELLS	Aft Livewell Capacity	33 gal. [125 l]	18 gal. [68 l]	18 gal. [68 l]	18 gal. [68 l]
	Bow Livewell Capacity	18 gal. [68 l]	13 gal. [49 l]	13 gal. [49 l]	18 gal. [68 l]
	Aerated with Timer	standard	standard	standard	standard
	LED-Lighted Livewell	standard	standard	standard	standard

		Competitor 205 Tiller	Competitor 185 Tiller	Comp 175 Tiller	Comp 165 Tiller
SEATING	Driver Seat Slider	standard	standard	standard	standard
	Air-Ride Pedestal	standard (driver)	standard (driver)	optional	optional
	Captain's Chair	NA	NA	NA	NA
	Premium Seat	standard [3]	standard [3]	standard [3]	standard [3]
	Deluxe Seat	NA	NA	NA	NA
	Pro Casting Seat	optional	optional	optional	optional
	Jump Seats	NA	NA	NA	NA
	Rear Flip Bench Seat	NA	NA	NA	NA
	Bow Cushions	NA	NA	NA	NA
	Console Back Cushions	NA	NA	NA	NA
Combing Pads	NA	NA	NA	NA	
STORAGE	Forward Cubby Storage	standard	standard	standard	standard
	Bow Dry Storage	standard	NA	NA	NA
	Bow Platform Storage	3	3	3	4
	Cockpit Floor Storage	standard	NA	NA	standard
	Lockable Glove Box	NA	NA	NA	NA
ELECTRONICS	Speedo/Fuel/Tach/Volt	standard	standard	standard	standard
	USB Port	standard	standard	standard	standard
	Horn	standard	standard	standard	standard
	Bluetooth Radio	standard	standard	standard	standard
	12/24 Volt Trolling System	standard	standard	standard	standard
	36 Volt Trolling System	standard	optional	optional	NA
	Interior Courtesy Lights	standard	standard	standard	standard
STEERING	Tilt Helm	NA	NA	NA	NA
	Hydraulic Steering	NA	NA	NA	NA
	No-Feedback Steering	NA	NA	NA	NA
CONVENIENCE	Built-in Toe Holds	NA	NA	NA	NA
	Cleats	fold down	fold down	fold down	fixed
	AlumaTrac™ Rail System	standard	standard	standard	standard
	Boarding Ladder	standard	standard	optional	optional
	Grab Handles	standard	standard	standard	standard
	Ski Pylon	NA	NA	NA	NA
	Aft Casting Deck Extension	NA	NA	NA	NA
CANVAS	Travel Cover	optional	optional	optional	optional
	High-Rise Bimini Top	NA	NA	NA	NA
	Enclosure Curtains	NA	NA	NA	NA
	Bow Cover	NA	NA	NA	NA

Aumacraft is not responsible for typographical errors. Specifications, options and standard features are subject to change without notice. For more information and photos of additional models, visit www.aumacraft.com.



Voyager 175 Tiller Classic 165 Tiller Escape 165 Tiller Escape 145 Tiller Summit 180 Tiller Summit 165 Tiller

	Voyager 175 Tiller	Classic 165 Tiller	Escape 165 Tiller	Escape 145 Tiller	Summit 180 Tiller	Summit 165 Tiller	
SPECIFICATIONS	Length	17' 10" (5.5 m)	16' 4" (4.98 m)	16' 6" (5.0 m)	14' 6" (4.4 m)	17' 10" (5.5 m)	16' 6" (5.0 m)
	Beam	87" (2.21 m)	82" (2.1 m)	76" (1.9 m)	76" (1.9 m)	87" (2.2)	76" (1.9 m)
	Max. Power	75 HP (56 kW)	60 HP (45 kW)	50 HP (37 kW)	40 HP (30 kW)	75 HP (56 kW)	50 HP (37 kW)
	Transom Width	87" (2.21 m)	82" (2.1 m)	76" (1.9 m)	76" (1.9 m)	86"	76" (1.9 m)
	Transom Height	20" (.51 m)	20" (.51 m)	20" (.51 m)	20" (.51 m)	20" (.51 m)	20" (.51 m)
	Max. Depth to Keel	35" (.89 mm)	35" (.89 mm)	36" (.91 mm)	32" (.81 mm)	35" (.89 mm)	36" (.91 mm)
	Max. Depth to Floor	20" (.51 m)	20" (.51 m)	20" (.51 m)	20" (.51 m)	20" (.51 m)	20" (.51 m)
	Max. Hull Thickness	0.145" (3.7 mm)	0.145" (3.7 mm)	0.145" (3.7 mm)	0.145" (3.7 mm)	0.145" (3.7 mm)	0.145" (3.7 mm)
	Freeboard Thickness	0.065" (1.7 mm)	0.065" (1.7 mm)	0.065" (1.7 mm)	0.065" (1.7 mm)	0.065" (1.7 mm)	0.065" (1.7 mm)
	Boat Dry Weight	945 lbs. (427 kg)	805 lbs. (365 kg)	646 lbs. (293 kg)	554 lbs. (251 kg)	945 lbs. (429 kg)	725 lbs. (329 kg)
	Max. Persons	6	5	5	4	6	4
	Max. Weight Capacity	1,480 lbs. (671 kg)	1,295 lbs. (587 kg)	1,250 lbs. (567 kg)	1,040 lbs. (472 kg)	1,400 lbs. (635 kg)	1,250 lbs. (567 kg)
	Fuel Capacity	17 gal. (64 l)	17 gal. (64 l)	portable	portable	17 gal. (64 l)	portable
ROD STORAGE	Lockable Rod Storage	standard	standard	standard	standard	standard	standard
	Port Rod Storage	8'	7'	8'	7'	8'	8'
	Starboard Rod Storage	8'	7'	NA	NA	9'	7'
	Bow Rod Storage	(8) 7' 6"	NA	NA	NA	NA	NA
	LED-Lighted Rod Locker	NA	NA	NA	NA	NA	NA
LIVEWELLS	Aft Livewell Capacity	18 gal. (68 l)	NA	NA	NA	18 gal. (68 l)	13 gal. (49 l)
	Bow Livewell Capacity	NA	34 gal. (129 l)	18 gal. (68 l)	18 gal. (68 l)	NA	NA
	Aerated with Timer	standard	standard	standard	standard	standard	standard
	LED-Lighted Livewell	standard	standard	standard	standard	standard	NA

		Voyageur 175 Tiller	Classic 165 Tiller	Escape 165 Tiller	Escape 145 Tiller	Summit 180 Tiller	Summit 165 Tiller
SEATING	Driver Seat Slider	standard	standard	standard	standard	standard	standard
	Air-Ride Pedestal	optional	optional	optional	optional	optional	optional
	Captain's Chair	NA	NA	NA	NA	NA	NA
	Premium Seat	standard [3]	optional	optional	optional	optional	optional
	Deluxe Seat	NA	standard [3]	standard [2]	standard [2]	standard [3]	standard [2]
	Pro Casting Seat	optional	optional	optional	optional	optional	optional
	Jump Seats	NA	NA	NA	NA	NA	NA
	Rear Flip Bench Seat	NA	NA	NA	NA	NA	NA
	Bow Cushions	NA	NA	NA	NA	NA	NA
	Console Back Cushions	NA	NA	NA	NA	NA	NA
Combing Pads	NA	NA	NA	NA	NA	NA	
STORAGE	Forward Cubby Storage	standard	standard	standard	standard	standard	standard
	Bow Dry Storage	NA	NA	NA	NA	NA	NA
	Bow Platform Storage	4	2	2	2	NA	NA
	Cockpit Floor Storage	NA	NA	NA	NA	NA	NA
	Lockable Glove Box	NA	NA	NA	NA	NA	NA
ELECTRONICS	Speedo/Fuel/Tach/Volt	standard	standard	NA	NA	NA	NA
	USB Port	NA	NA	NA	NA	NA	NA
	Horn	standard	standard	NA	NA	standard	NA
	Bluetooth Radio	NA	NA	NA	NA	NA	NA
	12/24 Volt Trolling System	standard	standard	standard	standard	standard	standard
	36 Volt Trolling System	NA	NA	NA	NA	NA	NA
	Interior Courtesy Lights	standard	standard	NA	NA	NA	NA
STEERING	Tilt Helm	NA	NA	NA	NA	NA	NA
	Hydraulic Steering	NA	NA	NA	NA	NA	NA
	No-Feedback Steering	NA	NA	NA	NA	NA	NA
CONVENIENCE	Built-in Toe Holds	NA	NA	NA	NA	NA	NA
	Cleats	fixed	Fixed	Fixed	Fixed	Fixed	Fixed
	AlumaTrac™ Rail System	standard	standard	standard	standard	standard	standard
	Boarding Ladder	optional	optional	optional	optional	optional	optional
	Grab Handles	standard	standard	NA	NA	NA	NA
	Ski Pylon	NA	NA	NA	NA	NA	NA
CANVAS	Aft Casting Deck Extension	NA	NA	NA	NA	NA	NA
	Travel Cover	optional	optional	optional	optional	optional	optional
	High-Rise Bimini Top	NA	NA	NA	NA	NA	NA
	Enclosure Curtains	NA	NA	NA	NA	NA	NA
Bow Cover	NA	NA	NA	NA	NA	NA	

AlumaCraft is not responsible for typographical errors. Specifications, options and standard features are subject to change without notice. For more information and photos of additional models, visit www.alumacraft.com.



	MV 2072 Bay	MV 1860 Bay	Pro 200	Pro 185	Pro 175
Length	20' (6.1 m)	18' (5.5 m)	20' (6.1 m)	18' 6" (5.5 m)	17' 6" (5.3 m)
Beam	94" (2.4 m)	90" (2.3 m)	98" (2.5 m)	90" (2.3 m)	84" (2.1 m)
Bottom Width	72" (1.8 m)	60" (1.5 m)	72" (1.8 m)	60" (1.5 m)	56" (1.4 m)
Side Height	27" (.69 m)	25" (.64 m)	27" (.69 m)	26" (.66 m)	26" (.66 m)
Transom Height	21" (.53 m)	21" (.53 m)	21" (.53 m)	21" (.53 m)	21" (.53 m)
Max. Power	150 HP (112 kW)	115 HP (86 kW)	200 HP (149 kW)	115 HP (86 kW)	90 HP (67 kW)
Fuel Tank	30 gal. (114 L)	20 gal. (76 L)	30 gal. (114 L)	20 gal. (76 L)	20 gal. (76 L)
Boat Weight	1,175 lbs. (533 kg)	865 lbs. (392 kg)	1745 lbs. (729 kg)	1,100 lbs. (499 kg)	1,075 lbs. (488 kg)
Persons	6	5	6	5	4
Max. Capacity	2,070 lbs. (953 kg)	1,600 lbs. (726 kg)	2,070 lbs. (953 kg)	1,405 lbs. (637 kg)	1,350 lbs. (612 kg)
Hull Gauge	.102" (2.6 mm)	.102" (2.6 mm)	.102" (2.6 mm)	.102" (2.6 mm)	.102" (2.6 mm)
Instrumentation	speedo, tach, fuel	speedo, tach, fuel	speedo, tach, fuel	speedo, tach, fuel	speedo, tach, fuel
Livewell	38 gal. (144 L) standard	20 gal. (76 L) standard	38 gal. (144 L) recirculating	20 gal. (76 L) recirculating	20 gal. (76 L) recirculating

	MV 2072 Bay	MV 1860 Bay	Pro 200	Pro 185	Pro 175	
HELM	Side Console	NA	NA	fiberglass	fiberglass	fiberglass
	Center Console	fiberglass	fiberglass	NA	NA	NA
	Port Side Console	NA	NA	optional	optional	NA
	Windshield	standard	standard	standard	standard	standard
HULL & FLOOR	Hull Type	Mod-V	Mod-V	Mod-V	Mod-V	Mod-V
	Spray-in Floor Liner	standard	standard	optional	optional	optional
	Rib Construction	L-Longitude	L-Longitude	L-Longitude	L-Longitude	L-Longitude
	Sponsons	optional	optional	NA	NA	NA
	Floor	standard	standard	standard	standard	standard
STORAGE	Rod Locker	port and starboard	NA	8' center	7' center	7' center
	Storage Compartments	3	3	8	4	4
	Livewell	1 bow	1 bow	1 aft	1 aft	1 aft
SEATS	Cockpit Seats	Lean Post	Lean Post	2	2	2
	Fishing Seats	2	2	2	2	2
	Seat Pedestal Bases	2 pin	2 pin	2 pin	2 pin	2 pin
ELECTRICAL	Trolling Motor/Graph	optional	optional	optional	optional	optional
	Trolling Motor Harness	6 ga. standard	6 ga. standard	6 ga. standard	6 ga. standard	6 ga. standard
	Lights	standard	standard	standard	standard	standard
	Power Points	1	1	1	1	1
	Bilge Pump	standard	standard	standard	standard	standard

Alumacraft is not responsible for typographical errors. Specifications, options and standard features are subject to change without notice. For more information and photos of additional models, visit www.alumacraft.com.



	Prowler 175	Prowler 165	Crappie DLX
Length	17' (5.2 m)	16' (4.9 m)	16' (4.9 m)
Beam	84" (2.1 m)	78" (2.0 m)	78" (2.0 m)
Bottom Width	56" (1.4 m)	50" (1.3 m)	48" (1.2 m)
Side Height	26" (.66 m)	23" (.58 m)	24" (.61 m)
Transom Height	21" (.53 m)	21" (.53 m)	21" (.53 m)
Max. Power	75 HP (56 kW)	60 HP (45 kW)	40 HP (30 kW)
Fuel Tank	12 gal. (45 L)	12 gal. portable	NA
Boat Weight	895 lbs. (406 kg)	830 lbs. (376 kg)	828 lbs. (376 kg)
Persons	4	4	3
Max. Capacity	1,300 lbs. (590 kg)	965 lbs. (438 kg)	745 lbs. (338 kg)
Hull Gauge	.102" (2.6 mm)	.102" (2.6 mm)	.102" (2.6 mm)
Instrumentation	speedo, tach	speedo, tach	NA
Livewell	20 gal. (76 L)	20 gal. (76 L)	16 gal. (61 L) standard

	Prowler 175	Prowler 165	Crappie DLX
HELM	Side Console	fiberglass	fiberglass
	Windshield	standard	standard
HULL & FLOOR	Hull Type	Mod-V	Mod-V
	Spray-in Floor Liner	optional	optional
	Rib Construction	L-Longitude	L-Longitude
	Sponsons	NA	NA
	Floor	standard	standard
STORAGE	Rod Locker	7' port side	NA
	Storage Compartments	2	2
	Livewell	1 aft	1 aft
SEATS	Cockpit Seats	2	2
	Fishing Seats	2	2
	Seat Pedestal Bases	2 pin	2 pin
ELECTRICAL	Trolling Motor/Graph	optional	optional
	Trolling Motor Harness	8 ga. standard	8 ga. standard
	Lights	standard	standard
	Power Points	NA	NA
	Bilge Pump	standard	standard

Alumacraft is not responsible for typographical errors. Specifications, options and standard features are subject to change without notice. For more information and photos of additional models, visit www.alumacraft.com.



	MV 2072 Center Console	MV 1860 Center Console	MV 1756 Center Console	MV 1650 Center Console
Length	20' (6.1 m)	18' (5.5 m)	17' (5.2 m)	16' (4.9 m)
Beam	94" (2.4 m)	90" (2.3 m)	85" (2.2 m)	78" (2.0 m)
Bottom Width	72" (1.8 m)	60" (1.5 m)	56" (1.4 m)	50" (1.3 m)
Side Height	27" (.69 m)	27" (.69 m)	26" (.66 m)	23" (.58 m)
Transom Height	21" (.53 m)	21" (.53 m)	21" (.53 m)	21" (.53 m)
Max. Power	135 HP (100 kW)	115 HP (86 kW)	75 HP (56 kW)	60 HP (45 kW)
Fuel Tank	30 gal. (76 L)	portable	20 gal. (76 L)	NA
Boat Weight	1,175 lbs. (533 kg)	865 lbs. (392 kg)	805 lbs. (365 kg)	720 lbs. (327 kg)
Persons	6	5	4	4
Max. Capacity	2,100 lbs. (953 kg)	1,600 lbs. (726 kg)	1,300 lbs. (590 kg)	1,010 lbs. (458 kg)
Hull Gauge	.102" (2.6 mm)	.102" (2.6 mm)	.102" (2.6 mm)	.102" (2.6 mm)
Instrumentation	speedo, tach, fuel	speedo, tach	speedo, tach, fuel	speedo, tach
Livewell	20 gal. (76 L) standard	11 gal. (42 L) standard	11 gal. (42 L) standard	9 gal. (34 L) standard

SPECIFICATIONS

		MV 2072 Center Console	MV 1860 Center Console	MV 1756 Center Console	MV 1650 Center Console
HELM	Center Console	fiberglass	aluminum	aluminum	aluminum
	Windshield	standard	standard	standard	standard
HULL & FLOOR	Hull Type	Mod-V	Mod-V	Mod-V	Mod-V
	Spray-in Floor Liner	optional	optional	optional	optional
	Rib Construction	L-Longitude	L-Longitude	L-Longitude	L-Longitude
	Sponsons	optional	optional	optional	optional
	Floor	standard	standard	standard	standard
STORAGE	Rod Locker	NA	NA	NA	NA
	Storage Compartments	2	2	2	2
	Livewell	1 center console	1 center console	1 center console	1 center console
SEATS	Cockpit Seats	lean post	lean post	lean post	lean post
	Fishing Seats	2	2	2	2
	Seat Pedestal Bases	2 pin	2 pin	2 pin	2 pin
ELECTRICAL	Trolling Motor/Graph	optional	optional	optional	optional
	Trolling Motor Harness	6 ga. standard	6 ga. standard	8 ga. standard	8 ga. standard
	Lights	standard	standard	standard	standard
	Power Points	1	1	1	1
	Bilge Pump	standard	standard	standard	standard

Aumacraft is not responsible for typographical errors. Specifications, options and standard features are subject to change without notice. For more information and photos of additional models, visit www.aumacraft.com.



MV 2072 Side Console

MV 1860 Side Console

MV 1756 Side Console

MV 1650 Side Console

	MV 2072 Side Console	MV 1860 Side Console	MV 1756 Side Console	MV 1650 Side Console
Length	20' (6.1 m)	18' (5.5 m)	17' (5.2 m)	16' (4.9 m)
Beam	94" (2.4 m)	90" (2.3 m)	83" (2.1 m)	78" (2.0 m)
Bottom Width	72" (1.8 m)	60" (1.5 m)	56" (1.4 m)	50" (1.3 m)
Side Height	27" (.69 m)	27" (.69 m)	26" (.66 m)	23" (.58 m)
Transom Height	21" (.53 m)	21" (.53 m)	21" (.53 m)	21" (.53 m)
Max. Power	150 HP (112 kW)	90 HP (67 kW)	75 HP (56 kW)	60 HP (45 kW)
Fuel Tank	30 gal. (114 L)	20 gal. (76 L)	20 gal. (76 L)	NA
Boat Weight	1,145 lbs. (519 kg)	910 lbs. (413 kg)	895 lbs. (406 kg)	720 lbs. (327 kg)
Persons	5	5	4	4
Max. Capacity	2,075 lbs. (941 kg)	1,600 lbs. (726 kg)	1,300 lbs. (590 kg)	1,010 lbs. (458 kg)
Hull Gauge	.102" (2.6 mm)	.102" (2.6 mm)	.102" (2.6 mm)	.102" (2.6 mm)
Instrumentation	speedo, tach, fuel	speedo, tach, fuel	speedo, tach, fuel	speedo, tach
Livewell	38 gal. (144 L) standard	38 gal. (144 L) standard	11 gal. (42 L) standard	14 gal. (53 L) standard

SPECIFICATIONS

		MV 2072 Side Console	MV 1860 Side Console	MV 1756 Side Console	MV 1650 Side Console
HELM	Side Console	fiberglass	fiberglass	aluminum	aluminum
	Windshield	standard	standard	standard	standard
HULL & FLOOR	Hull Type	Mod-V	Mod-V	Mod-V	Mod-V
	Spray-in Floor Liner	optional	optional	optional	optional
	Rib Construction	L-Longitude	L-Longitude	L-Longitude	L-Longitude
	Sponsons	optional	optional	optional	optional
	Floor	standard	standard	standard	standard
STORAGE	Rod Locker	1 port side	1 port side	1 port side	NA
	Storage Compartments	3	3	3	3
	Livewell	1 bow	1 bow	1 side console	1 side console
SEATS	Cockpit Seats	2	2	2	2
	Fishing Seats	2	2	2	2
	Seat Pedestal Bases	2 pin	2 pin	2 pin	2 pin
ELECTRICAL	Trolling Motor/Graph	optional	optional	optional	optional
	Trolling Motor Harness	6 ga. standard	6 ga. standard	8 ga. standard	8 ga. standard
	Lights	standard	standard	standard	standard
	Power Points	1	1	1	1
	Bilge Pump	standard	standard	standard	standard



MV 2072 Tiller

MV 1860 Tiller

MV 1756 Tiller

MV 1650 Tiller

	MV 2072 Tiller	MV 1860 Tiller	MV 1756 Tiller	MV 1650 Tiller
Length	20' (6.1 m)	18' (5.5 m)	17' (5.2 m)	16' (4.9 m)
Beam	94" (2.4 m)	90" (2.3 m)	83" (2.1 m)	78" (2.0 m)
Bottom Width	72" (1.8 m)	60" (1.5 m)	56" (1.4 m)	50" (1.3 m)
Side Height	27" (.69 m)	28" (.71 m)	26" (.66 m)	23" (.58 m)
Transom Height	21" (.53 m)	21" (.53 m)	21" (.53 m)	21" (.53 m)
Max. Power	90 HP (67 kW)	70 HP (62 kW)	50 HP (37 kW)	40 HP (30 kW)
Fuel Tank	portable	portable	NA	NA
Boat Weight	730 lbs. (331 kg)	625 lbs. (283 kg)	575 lbs. (261 kg)	470 lbs. (213 kg)
Persons	4	4	4	4
Max. Capacity	2,100 lbs. (953 kg)	1,600 lbs. (726 kg)	1,300 lbs. (590 kg)	1,010 lbs. (458 kg)
Hull Gauge	.102" (2.6 mm)	.102" (2.6 mm)	.102" (2.6 mm)	.102" (2.6 mm)
Instrumentation	NA	NA	NA	NA
Livewell	NA	NA	NA	NA

SPECIFICATIONS

		MV 2072 Tiller	MV 1860 Tiller	MV 1756 Tiller	MV 1650 Tiller
HELM	Side Console	optional	optional	optional	optional
	Hull Type	Mod-V	Mod-V	Mod-V	Mod-V
HULL & FLOOR	Spray-in Floor Liner	optional	optional	optional	optional
	Rib Construction	L-Longitude	L-Longitude	L-Longitude	L-Longitude
	Sponsons	optional	optional	optional	optional
	Floor	standard	standard	standard	standard
	Storage Compartments	1	1	1	1
STORAGE	Gun Box	optional	optional	optional	optional
	Fishing Seats	optional	optional	optional	optional
SEATS	Seat Pedestal Bases	1 pin	1 pin	1 pin	1 pin
	Trolling Motor/Graph	optional	optional	optional	optional
ELECTRICAL	Trolling Motor Harness	optional	optional	optional	optional
	Lights	optional	optional	optional	optional
	Power Points	optional	optional	optional	optional
	Bilge Pump	optional	optional	optional	optional

Aumacraft is not responsible for typographical errors. Specifications, options and standard features are subject to change without notice. For more information and photos of additional models, visit www.aumacraft.com.



	Waterfowler 18 DLX TL	Waterfowler 17 DLX TL	Waterfowler 16	Waterfowler 15
Length	18' / 5.5 m	17' / 5.2 m	16' (4.9 m)	15' (4.6 m)
Beam	90" / 2.3 m	85" / 2.2 m	78" (2.0 m)	65" (1.7 m)
Bottom Width	60" (1.5 m)	56" (1.4 m)	50" (1.3 m)	46" (1.2 m)
Side Height	21" (.53 m)	21" (.53 m)	21" (.53 m)	20" (.51 m)
Transom Height	2.3 m - 0.5 m	2.2 m - 0.5 m	21" (.53 m)	15" (.38 m)
Max. Power	70 HP / 52 kW	50 HP / 37 kW	40 HP (30 kW)	25 HP (19 kW)
Fuel Tank	portable	portable	NA	NA
Boat Weight	625 lbs. / 283 kg	575 lbs. / 261 kg	555 lbs. (252 kg)	320 lbs. (145 kg)
Persons	4	4	4	3
Max. Capacity	1,600 lbs. / 726 kg	1,300 lbs. / 590 kg	1,010 lbs. (458 kg)	719 lbs. (326 kg)
Hull Gauge	.102" / 2.6 mm	.102" / 2.6 mm	.102" (2.6 mm)	.080" (2.0 mm)
Instrumentation	NA	NA	NA	NA
Livewell	23 gal (83 l)	23 gal (83 l)	NA	NA

SPECIFICATIONS

	Waterfowler 18 DLX TL	Waterfowler 17 DLX TL	Waterfowler 16	Waterfowler 15	
HULL & FLOOR	Hull Type	Mod-V	Mod-V	Mod-V	
	Spray-in Floor Liner	optional	optional	optional	
	Rib Construction	L-Longitude	L-Longitude	L-Longitude	
	Sponsons	optional	optional	optional	NA
	Floor	standard	standard	standard	standard
	Drop Deck	NA	NA	standard	standard
STORAGE	Storage Compartments	2	2	1	NA
	Livewell	1 bow	1 bow	NA	NA
	Gun Box	1	1	1	1
SEATS	Fishing Seats	optional	optional	optional	optional
	Seat Pedestal Bases	1 pin	1 pin	1 pin	1 pin
ELECTRICAL	Trolling Motor/Graph	optional	optional	optional	optional
	Trolling Motor Harness	8 ga. standard	8 ga. standard	8 ga. standard	8 ga. standard
	Lights	standard	standard	standard	standard
	Power Points	standard	standard	NA	NA
	Bilge Pump	standard	standard	standard	standard

Aumacraft is not responsible for typographical errors. Specifications, options and standard features are subject to change without notice. For more information and photos of additional models, visit www.aumacraft.com.



Shown with optional floor



Shown with optional floor



Shown with optional floor




	V-16 [20°]	V-16 [15°]	V-14 [20°]	V-14 [15°]
LENGTH	16' 7" / 5.0 m	16' 7" / 5.0 m	14' 3" / 4.3 m	14' 3" / 4.3 m
WIDTH	70" / 1.8 m	70" / 1.8 m	68" / 1.7 m	68" / 1.7 m
TRANSOM (W-H)	62" - 20" / 1.6 m - .51 m	62" - 15" / 1.6 m - .38 m	62" - 20" / 1.6 m - .51 m	62" - 15" / 1.6 m - .38 m
MAX. HULL THICKNESS	.065" / 1.7 mm	.065" / 1.7 mm	.065" / 1.7 mm	.065" / 1.7 mm
MAX. POWER	25 HP / 19 kW	25 HP / 19 kW	20 HP / 15 kW	20 HP / 15 kW
MAX. CAPACITY	(5) 1,380 lbs. / 626 kg	(5) 1,255 lbs. / 569 kg	(5) 1,195 lbs. / 542 kg	(5) 1,015 lbs. / 460 kg
BOAT WEIGHT	285 lbs. / 129 kg	280 lbs. / 129 kg	235 lbs. / 107 kg	230 lbs. / 104 kg
FUEL CAPACITY	portable	portable	portable	portable
SEAT TYPES	bench/split	bench/split	bench/split	bench/split



	MV 1648 NCS	MV 1648	MV 1648 SS	MV 1448	MV 1448 NCS	1648	1648 NCS	1448	1448 NCS	1542	1442	1442 LW	1442 NCS	1436 LITE	1236	1036
Length	16'	16'	16'	14'	14'	16'	16'	14'	14'	15'	14'	14'	14'	14'	12'	10'
Beam	70"	70"	70"	70"	70"	70"	70"	70"	70"	62"	62"	62"	62"	55"	55"	55"
Bottom Width	48"	48"	48"	48"	48"	48"	48"	48"	48"	42"	42"	42"	42"	36"	36"	36"
Side Height	24"	21"	21"	21"	21"	21"	21"	21"	21"	20"	20"	20"	20"	19"	19"	19"
Transom Height	15" or 20"	15" or 20"	15" or 20"	15" or 20"	15" or 20"	15" or 20"	15" or 20"	15" or 20"	15" or 20"	15"	15" or 20"	15" or 20"	15" or 20"	15"	15"	15"
Max. Power	35 HP	35 HP	35 HP	25 HP	25 HP	35 HP	35 HP	25 HP	25 HP	25 HP	25 HP	25 HP	25 HP	15 HP	10 HP	3 HP
Approx. Weight	320 lbs.	320 lbs.	310 lbs.	285 lbs.	285 lbs.	320 lbs.	320 lbs.	285 lbs.	285 lbs.	220 lbs.	205 lbs.	210 lbs.	240 lbs.	135 lbs.	125 lbs.	100 lbs.
Persons	4	4	4	4	4	4	4	4	4	3	3	3	3	3	3	2
Max. Capacity	1,010 lbs.	1,010 lbs.	1,010 lbs.	885 lbs.	885 lbs.	1,010 lbs.	1,010 lbs.	885 lbs.	885 lbs.	775 lbs.	765 lbs.	755 lbs.	755 lbs.	600 lbs.	540 lbs.	365 lbs.
Hull Gauge	.070"	.070"	.070"	.070"	.070"	.070"	.070"	.070"	.070"	.063"	.063"	.063"	.063"	.053"	.053"	.053"
Hull Type	Mod-V	Mod-V	Mod-V	Mod-V	Mod-V	Flat Bottom	Flat Bottom	Flat Bottom	Flat Bottom	Flat Bottom	Flat Bottom	Flat Bottom	Flat Bottom	Flat Bottom	Flat Bottom	Flat Bottom
Number of Ribs	10	10	11	7	7	9	11	7	7	8	7	7	7	6	5	2
Side Steering	optional	optional	optional	optional	optional	optional	optional	optional	optional	NA	NA	NA	NA	NA	NA	NA
Gravity Flow Livewell	optional	optional	optional box	optional	optional	optional	optional box	optional	optional	optional box	optional box	standard	optional box	optional box	NA	NA
Trotting Motor Bracket	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional
Light Bracket	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional
Door Locks	standard	standard	standard	standard	standard	standard	standard	standard	standard	standard	standard	standard	standard	standard	standard	standard
Standard Color	Olive Drab	Olive Drab	Olive Drab	Olive Drab	Olive Drab	Olive Drab	Olive Drab	Olive Drab	Olive Drab	Olive Drab	Olive Drab	Olive Drab	Olive Drab	Olive Drab	Olive Drab	Olive Drab
Optional Color	Open Banks Camo	Open Banks Camo	Open Banks Camo	Open Banks Camo	Open Banks Camo	Open Banks Camo	Open Banks Camo	Open Banks Camo	Open Banks Camo	Open Banks Camo	Open Banks Camo	Open Banks Camo	Open Banks Camo	Open Banks Camo	Open Banks Camo	Open Banks Camo

Alumacraft is not responsible for typographical errors. Specifications, options and standard features are subject to change without notice. For more information and photos of additional models, visit www.alumacraft.com.

EXPLORE AN ENTIRE WORLD OF ADVENTURE WITH ALL OF OUR BRP PRODUCTS. BRP.COM

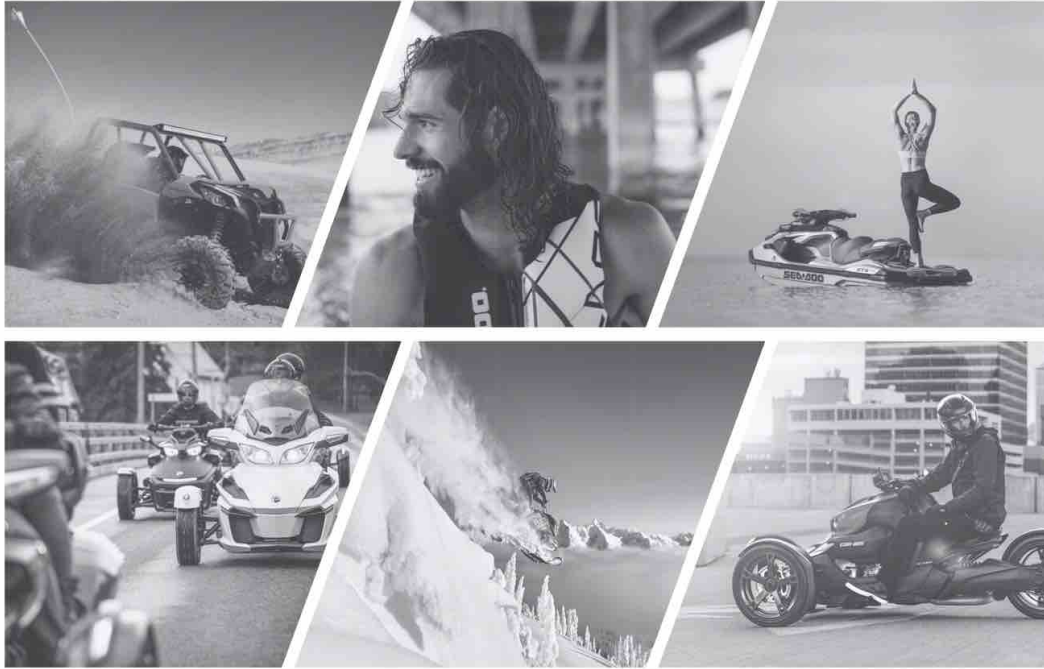

ski-doo LYNX SEAWOO CAN-AM ROTAX ALUMAsoft Manitou EVINRUDE
